






SITE ANALYSIS LEGEND

-  Vehicle direction - Road
-  Sun Path
-  Site Pedestrian Movement
-  Services & B.O.H. Movement
-  Site Vehicle Movement

STRENGTHS






- Proximity to City Ring Route
- Proximity to North Adelaide
- Proximity to local community districts
 - Lefevre Park
 - Wilderness Tennis Courts
 - The Olive Groves
- Strong pedestrian circulation and street activation from all main road frontages
- On site community activation and integration of retained heritage site
- Use of strong landscape design to ensure holistic site integration
- Façade articulation to high profile public realm
- New road for optimal vehicle access and
- Retention and activation of existing heritage building Buckingham Arms
- Materiality to complement existing streetscapes and reference history of site context


CONSTRAINTS

- Acoustic considerations with proximity to high traffic roads Northcote Terrace, Walkerville Terrace and Main Road intersection
- Maximising use of existing site configuration without encroaching on site setbacks
- Public vs private interface from highly trafficable main road frontages




SITE PLAN LEGEND


-  NEW PAVED ROADWAY
-  NEW SITE PAVING
-  COUNCIL PAVING
-  TPZ - TREE PROTECTION ZONE
-  SRZ - STRUCTURAL ROOT ZONE




- LEGEND
- PREVIOUSLY RECONSTRUCTED FABRIC
 - ALTERED FABRIC
 - ALTERED FABRIC (INTERNAL)
 - FABRIC WITH LESSER HERITAGE VALUE

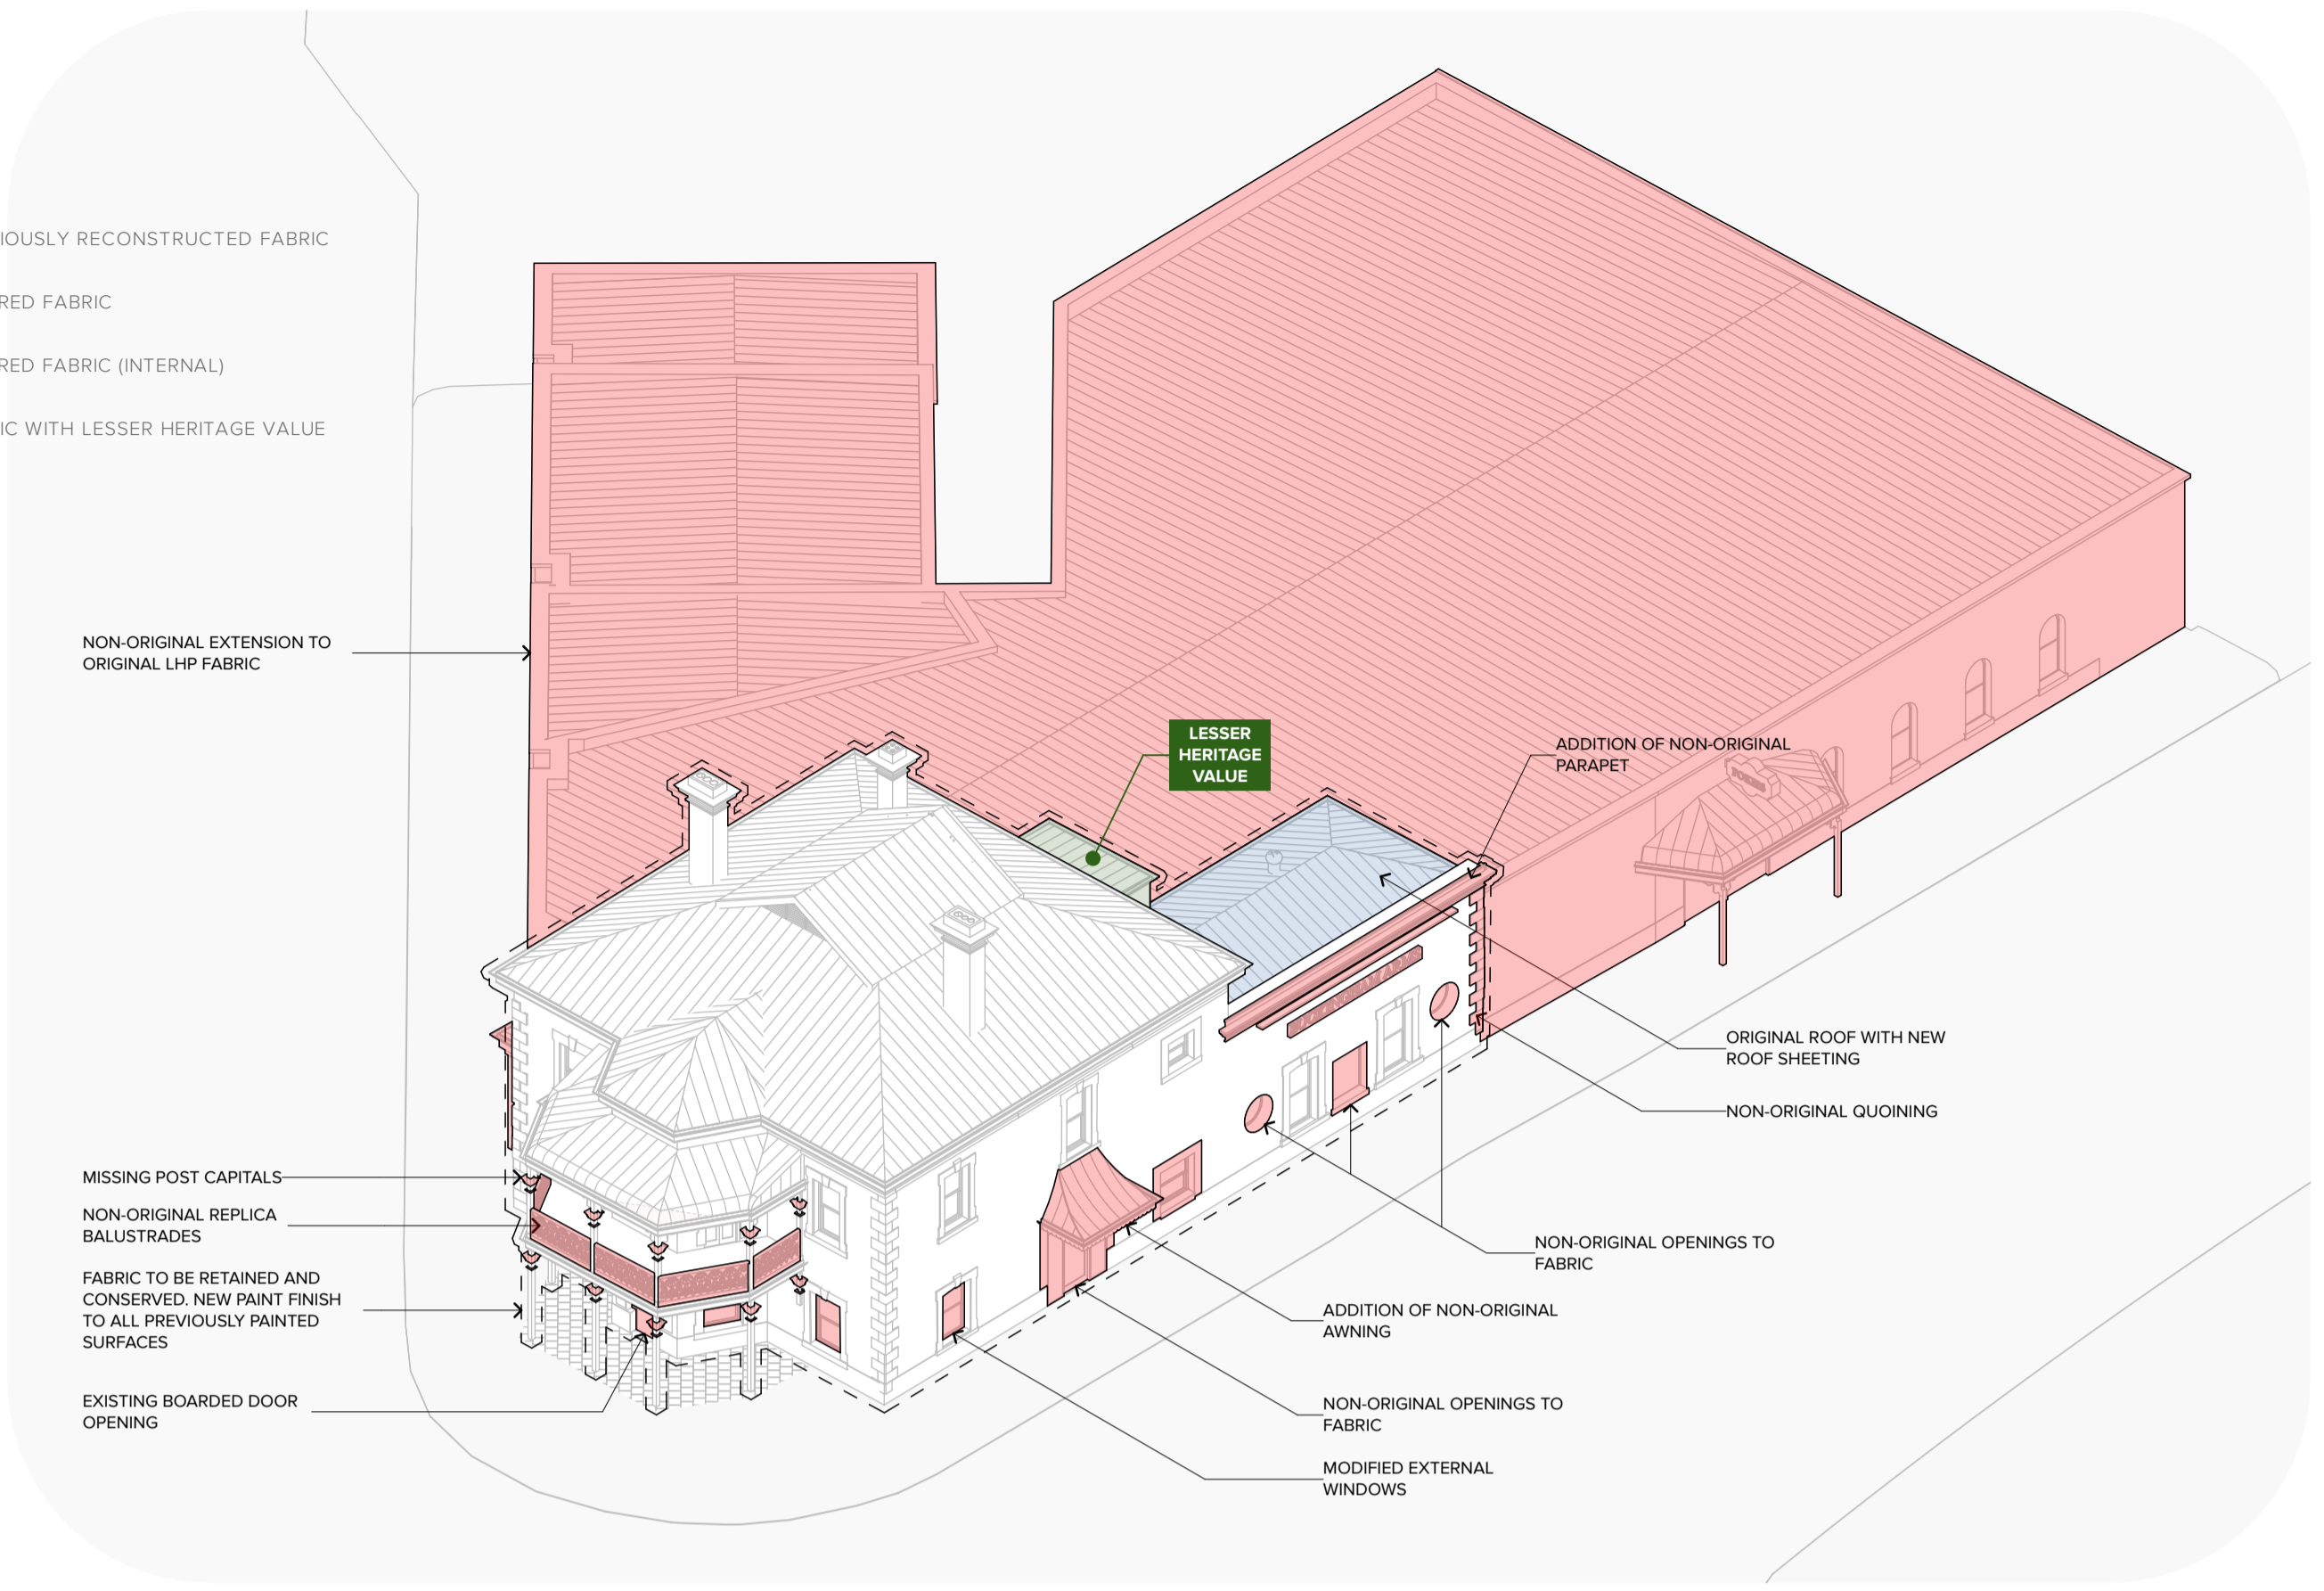


SOUTH EAST CORNER

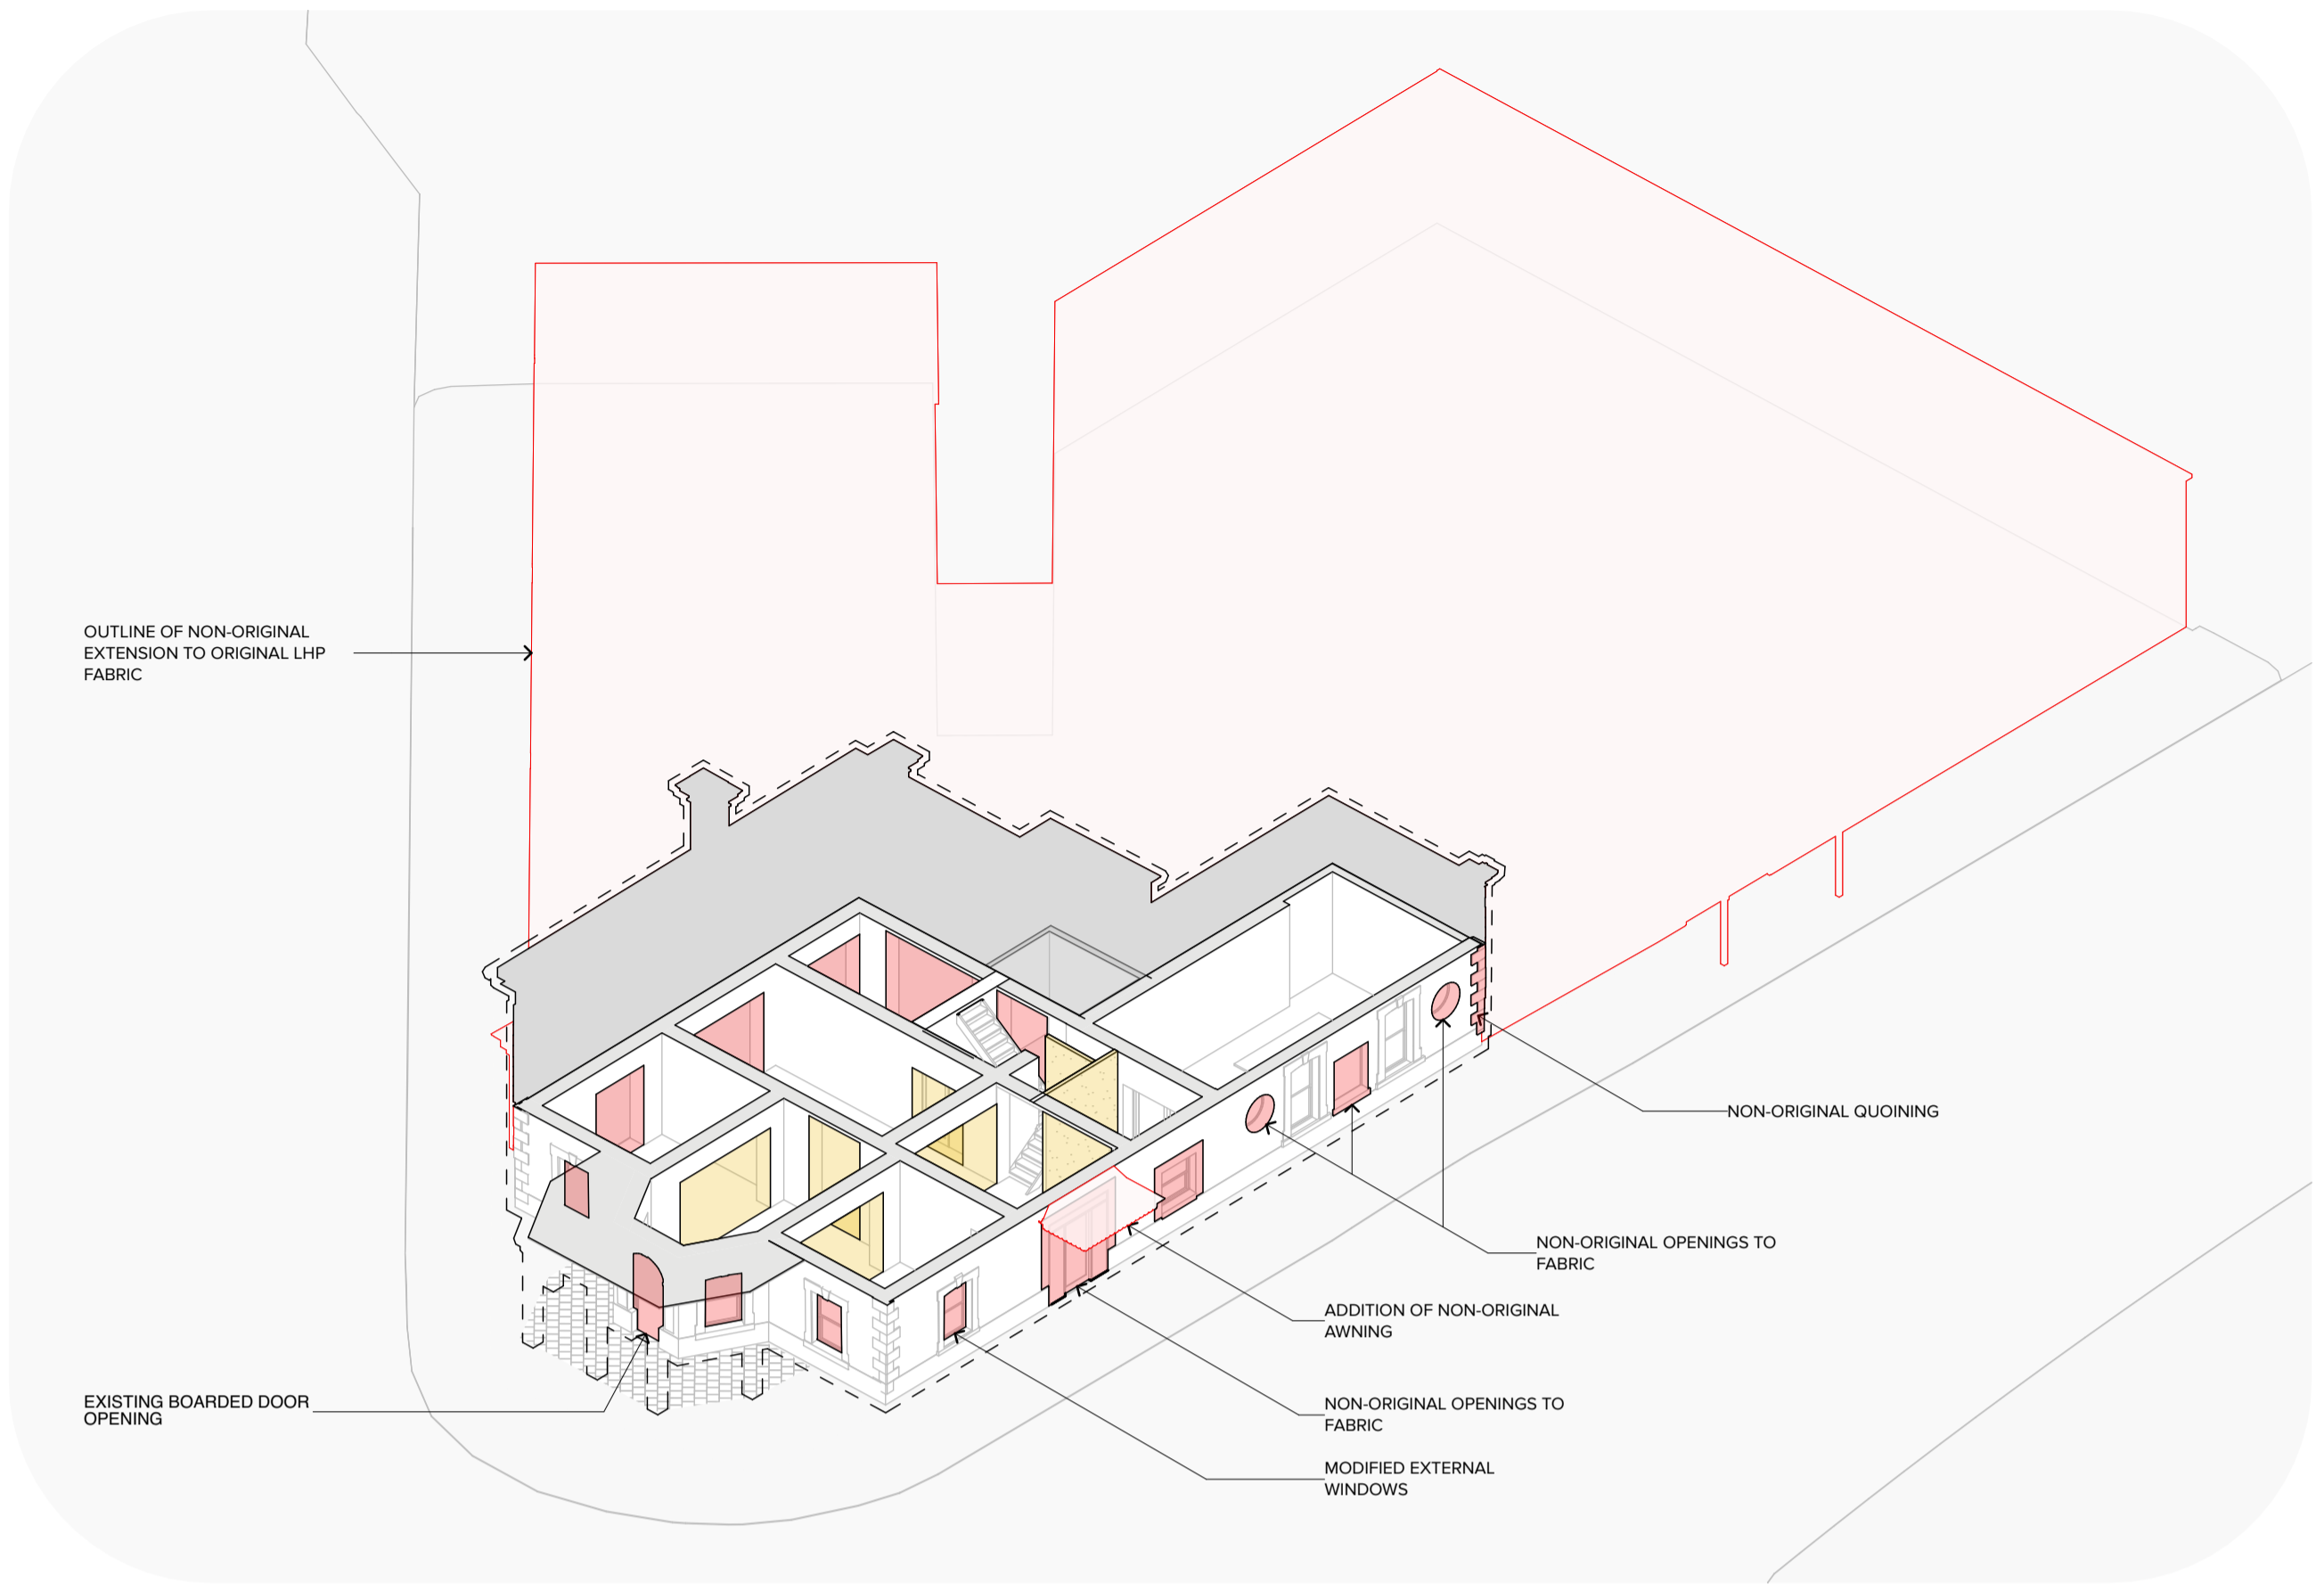


GROUND LEVEL CUT PLANE

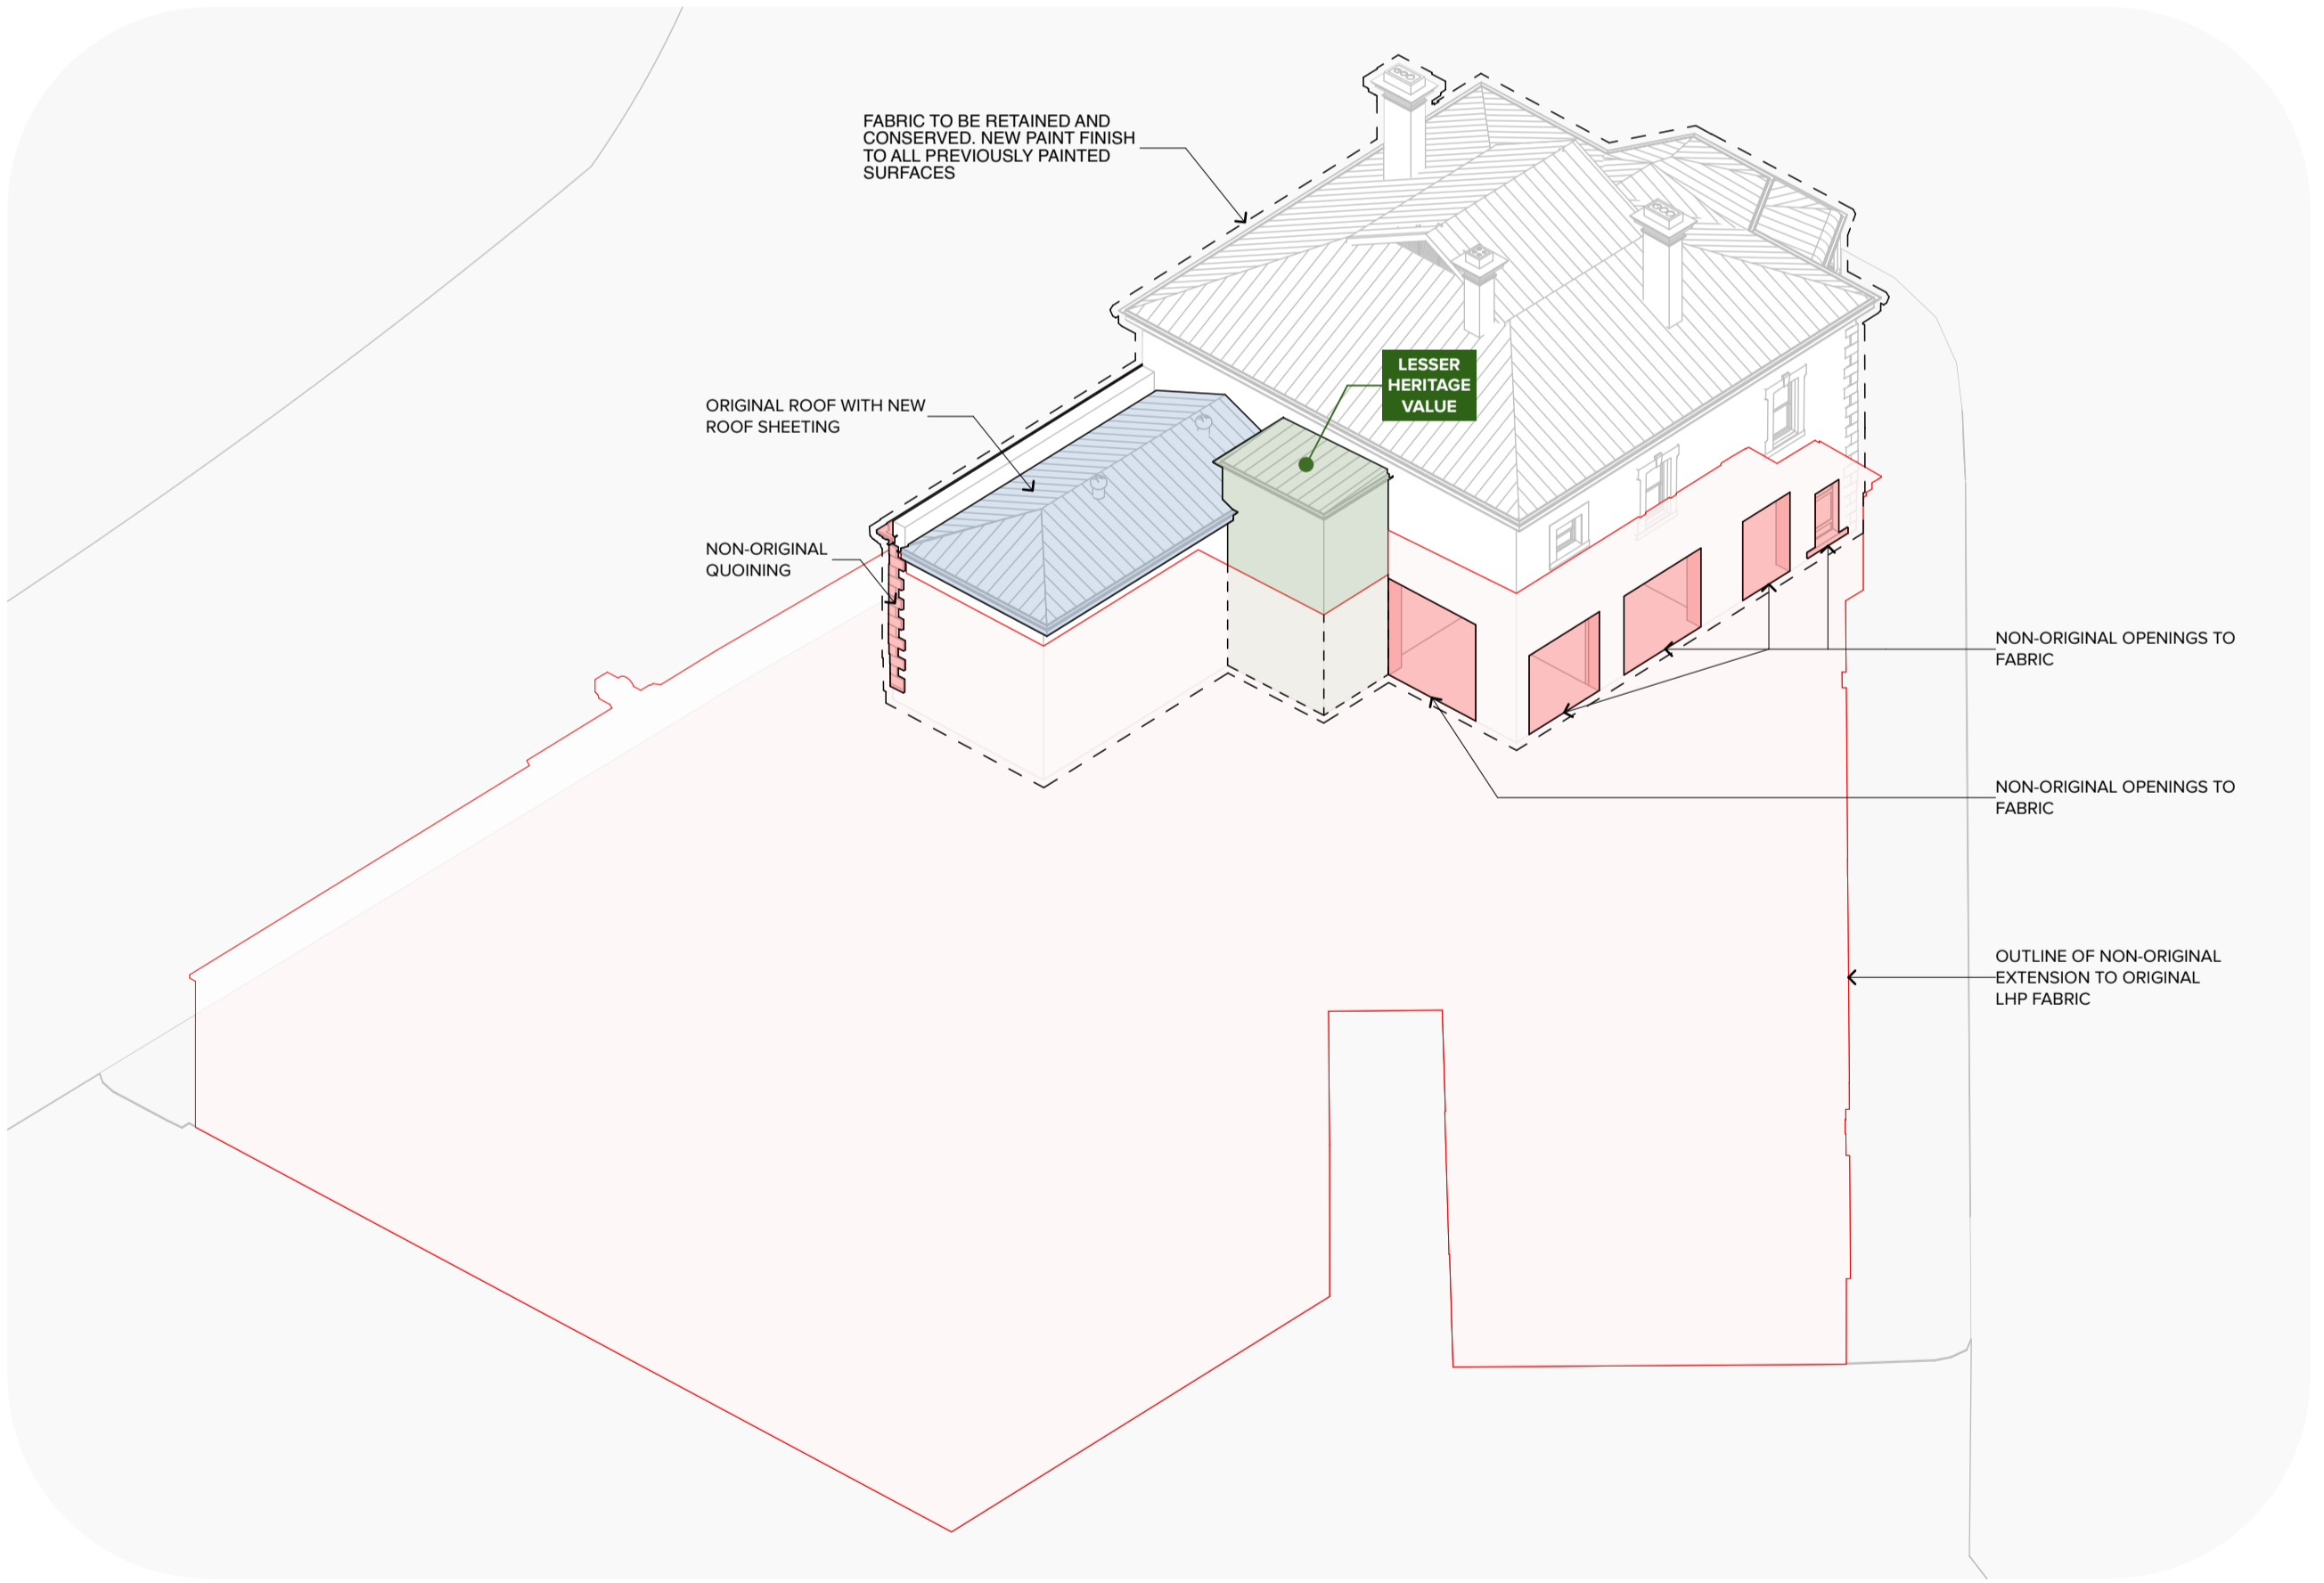


NORTH WEST CORNER

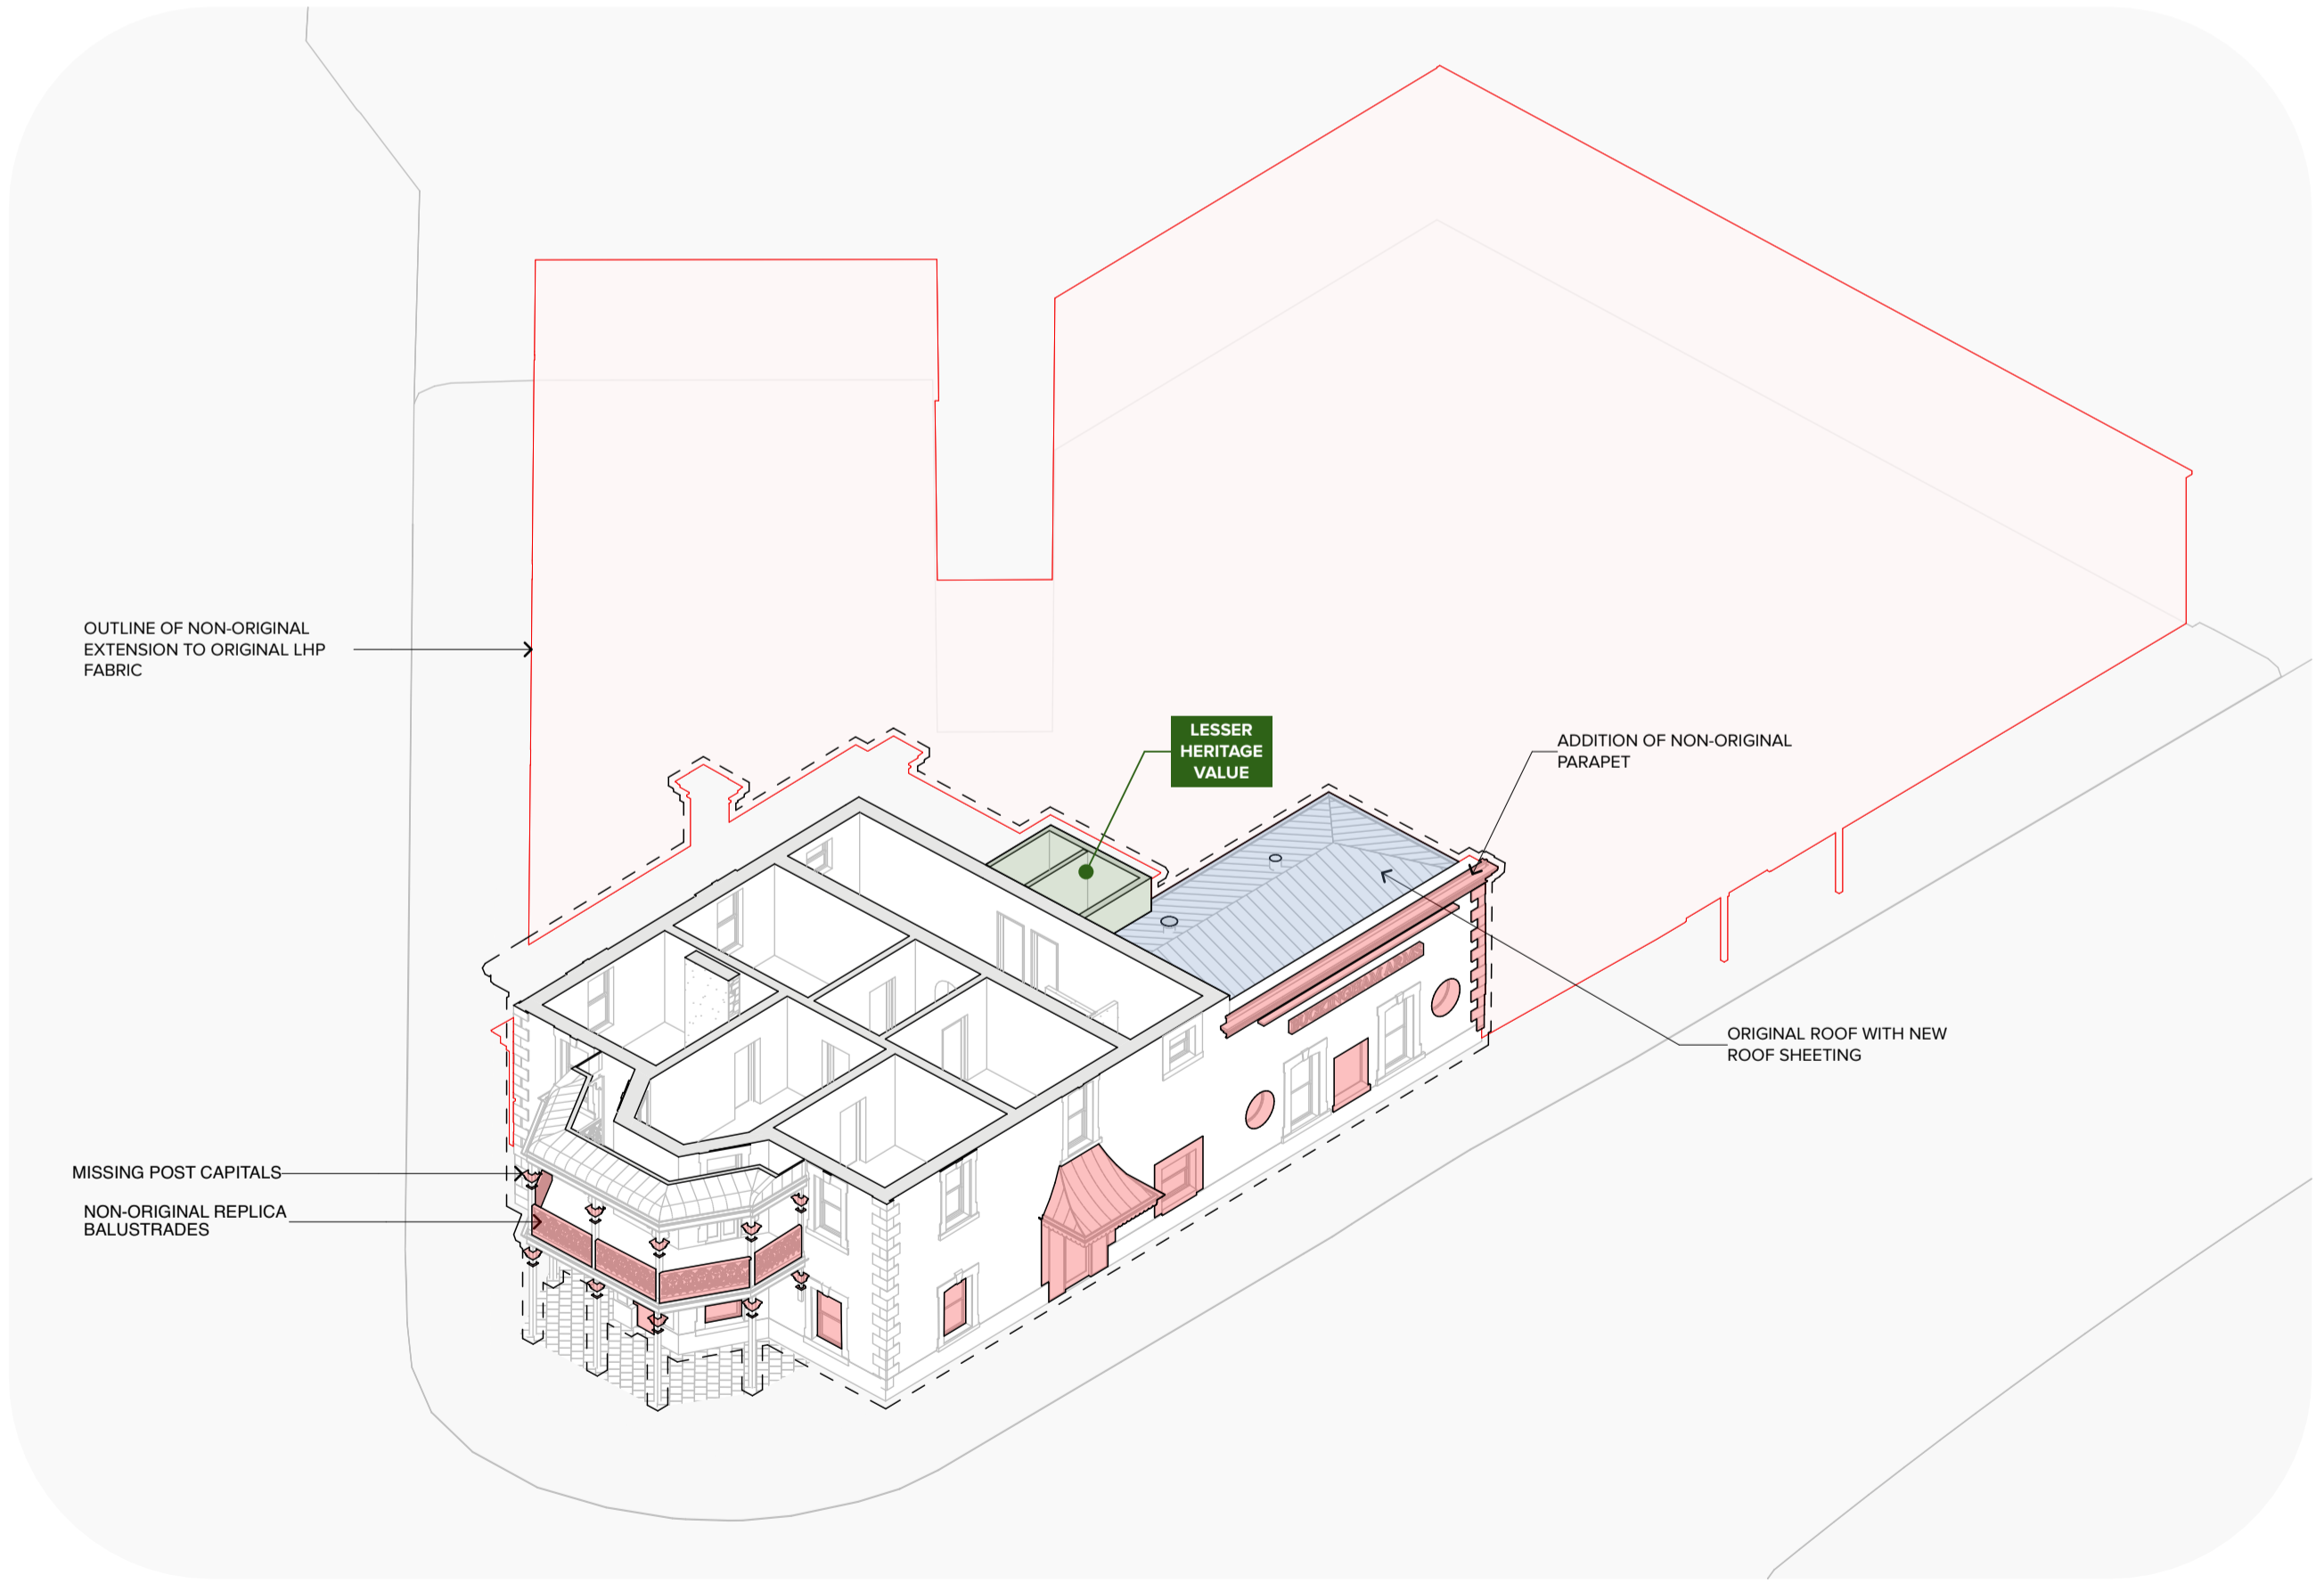


LEVEL 1 CUT PLANE

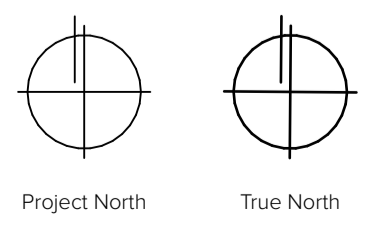


ITEMS TO BE DEMOLISHED

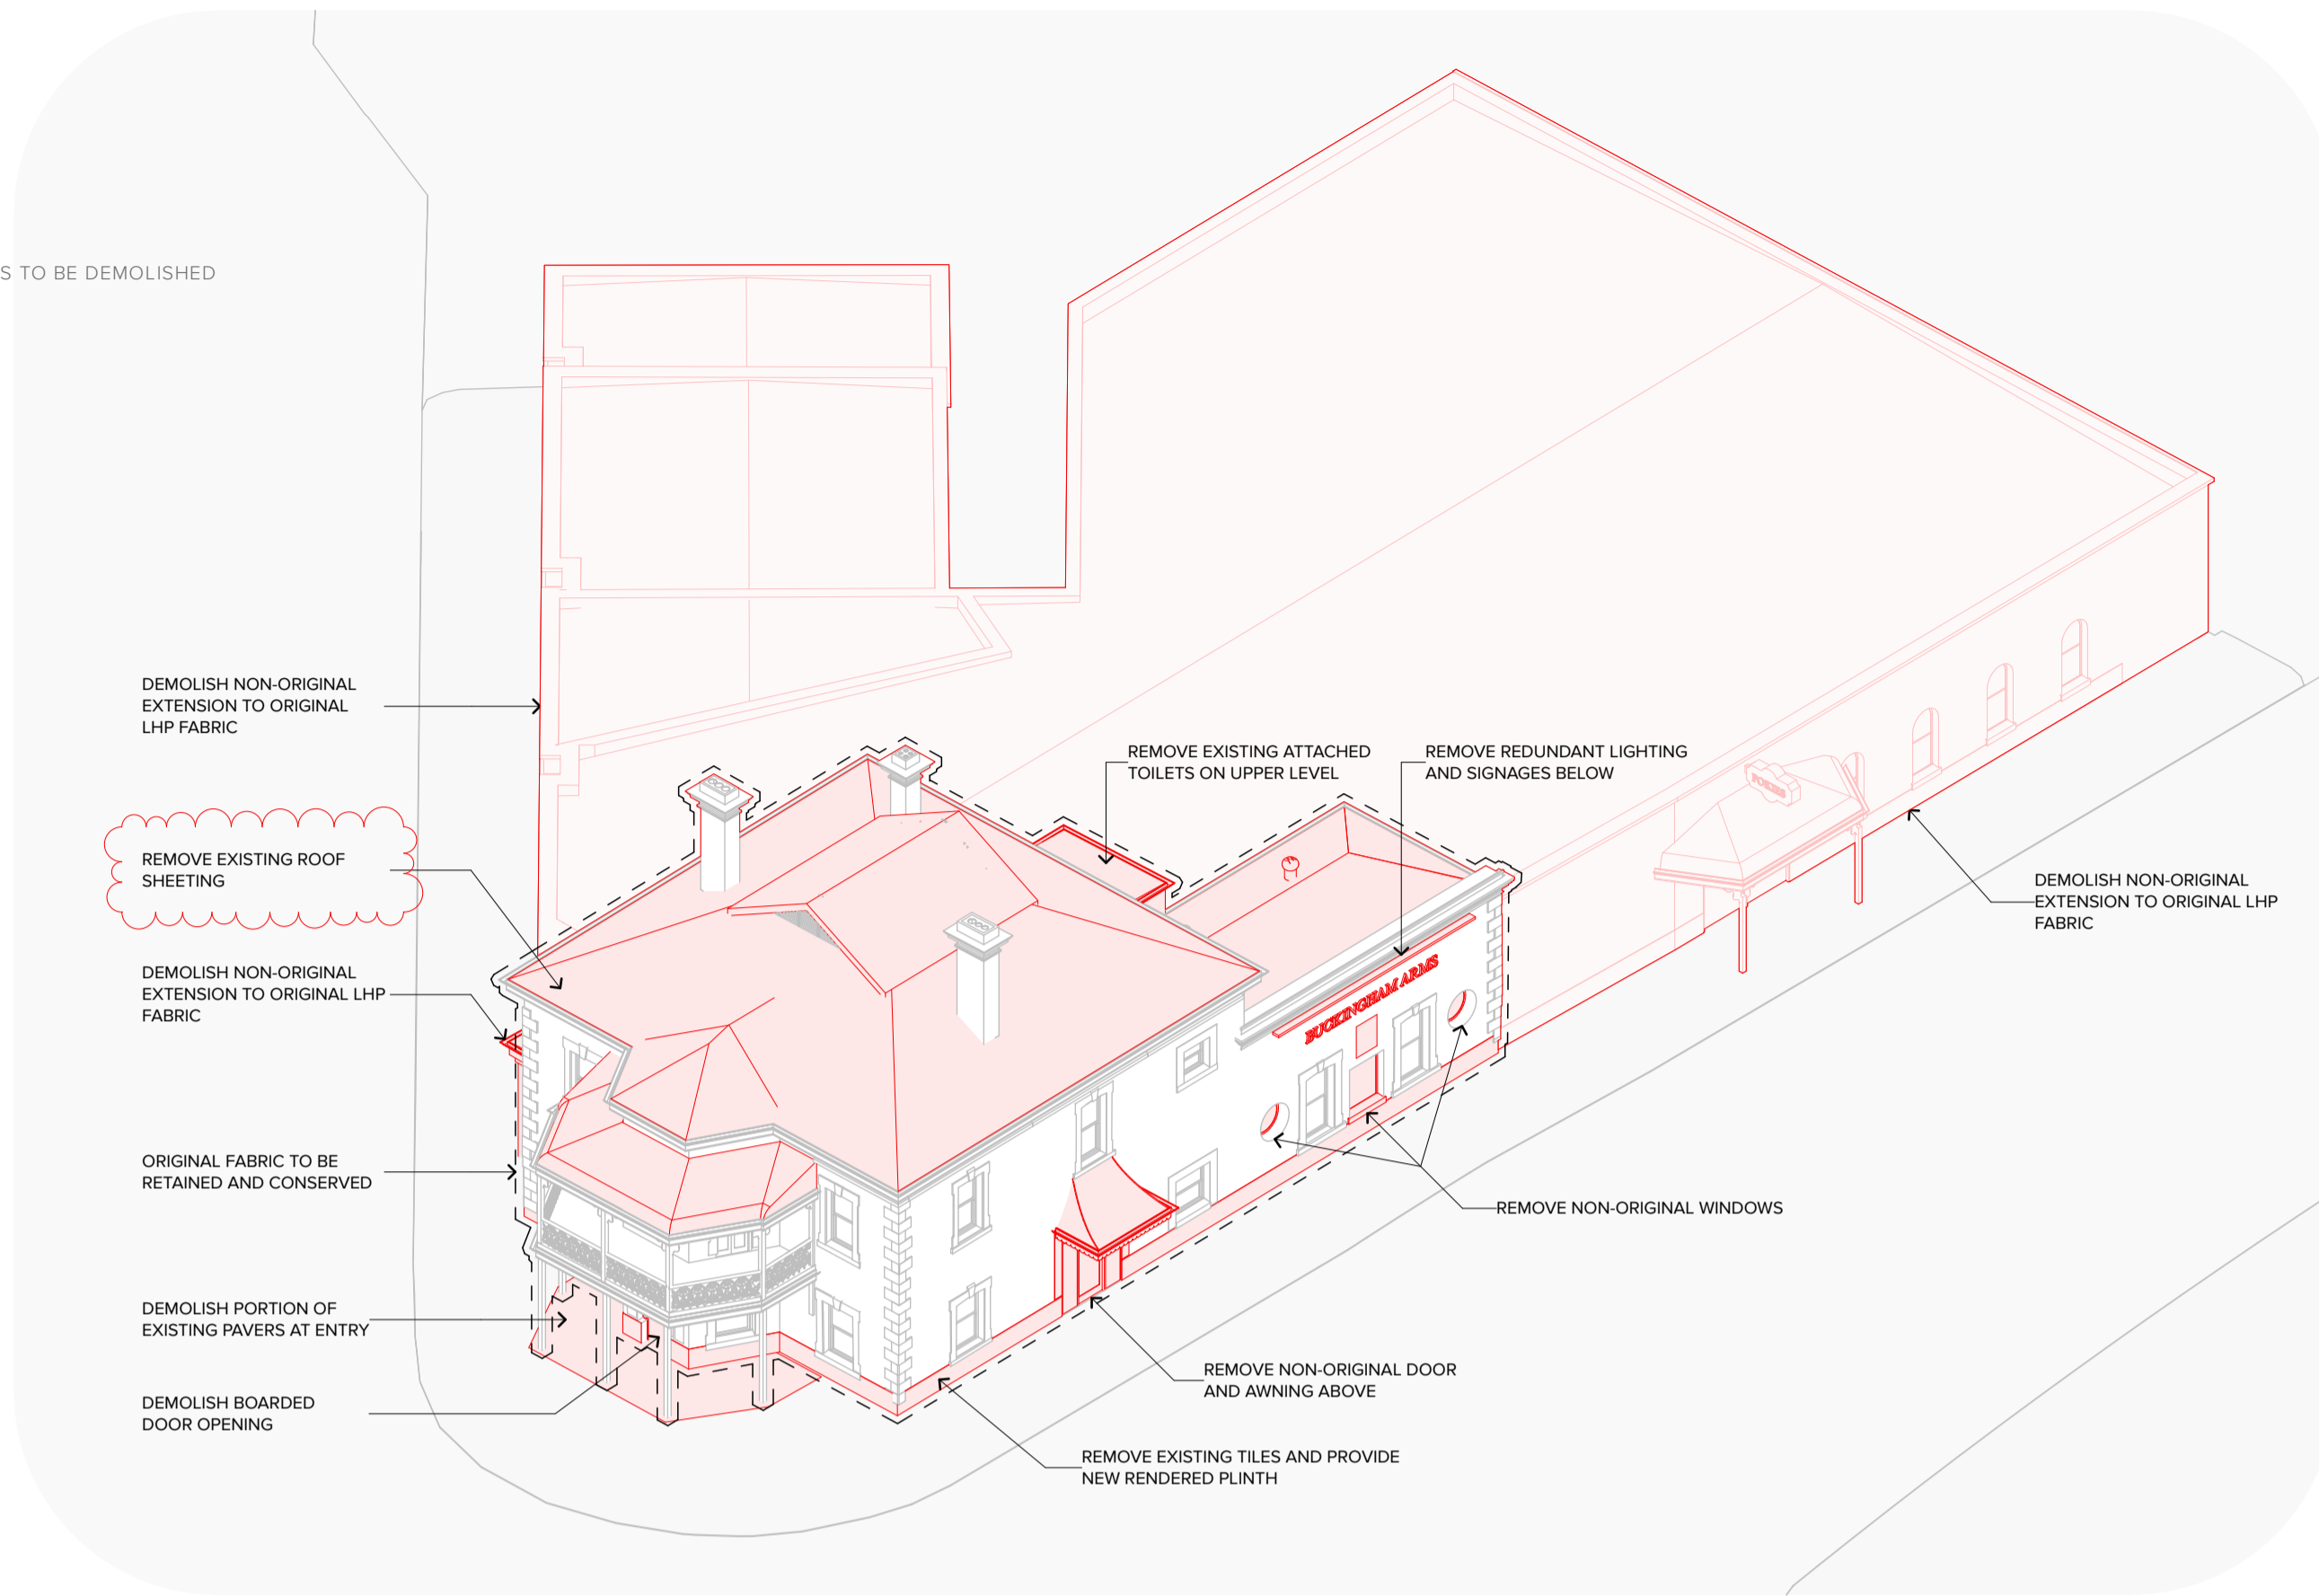


SOUTH EAST CORNER

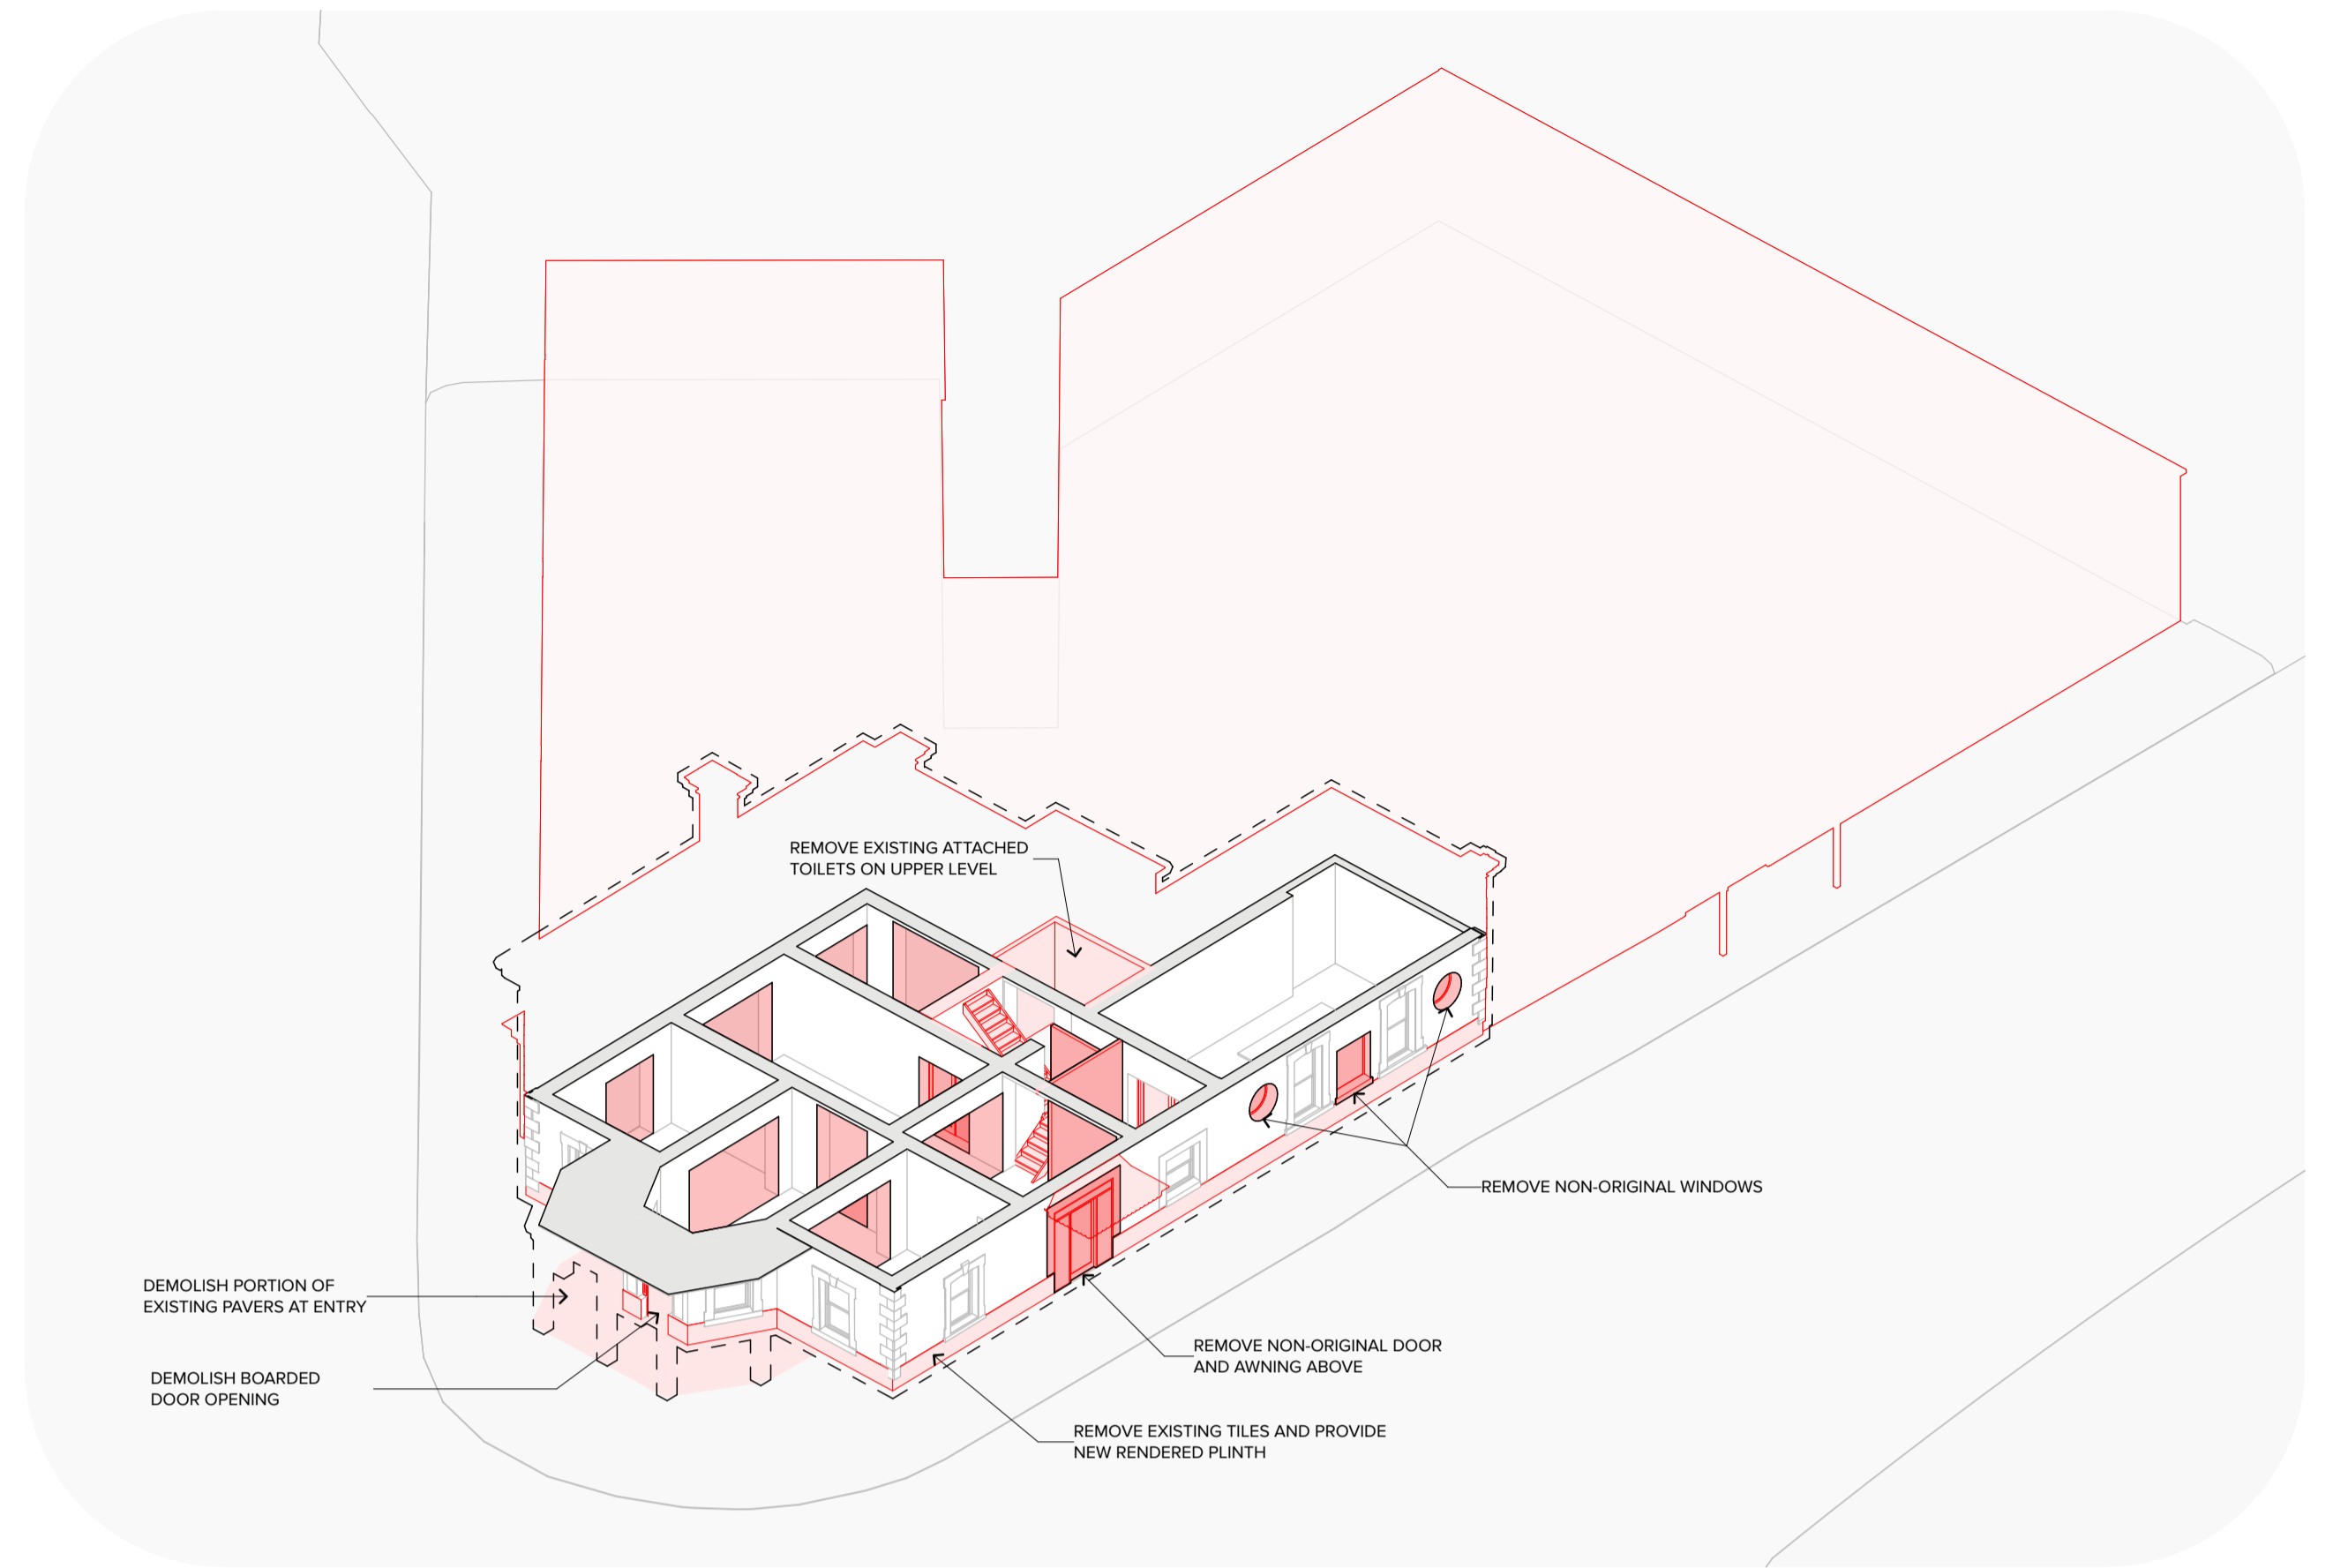


GROUND LEVEL CUT PLANE


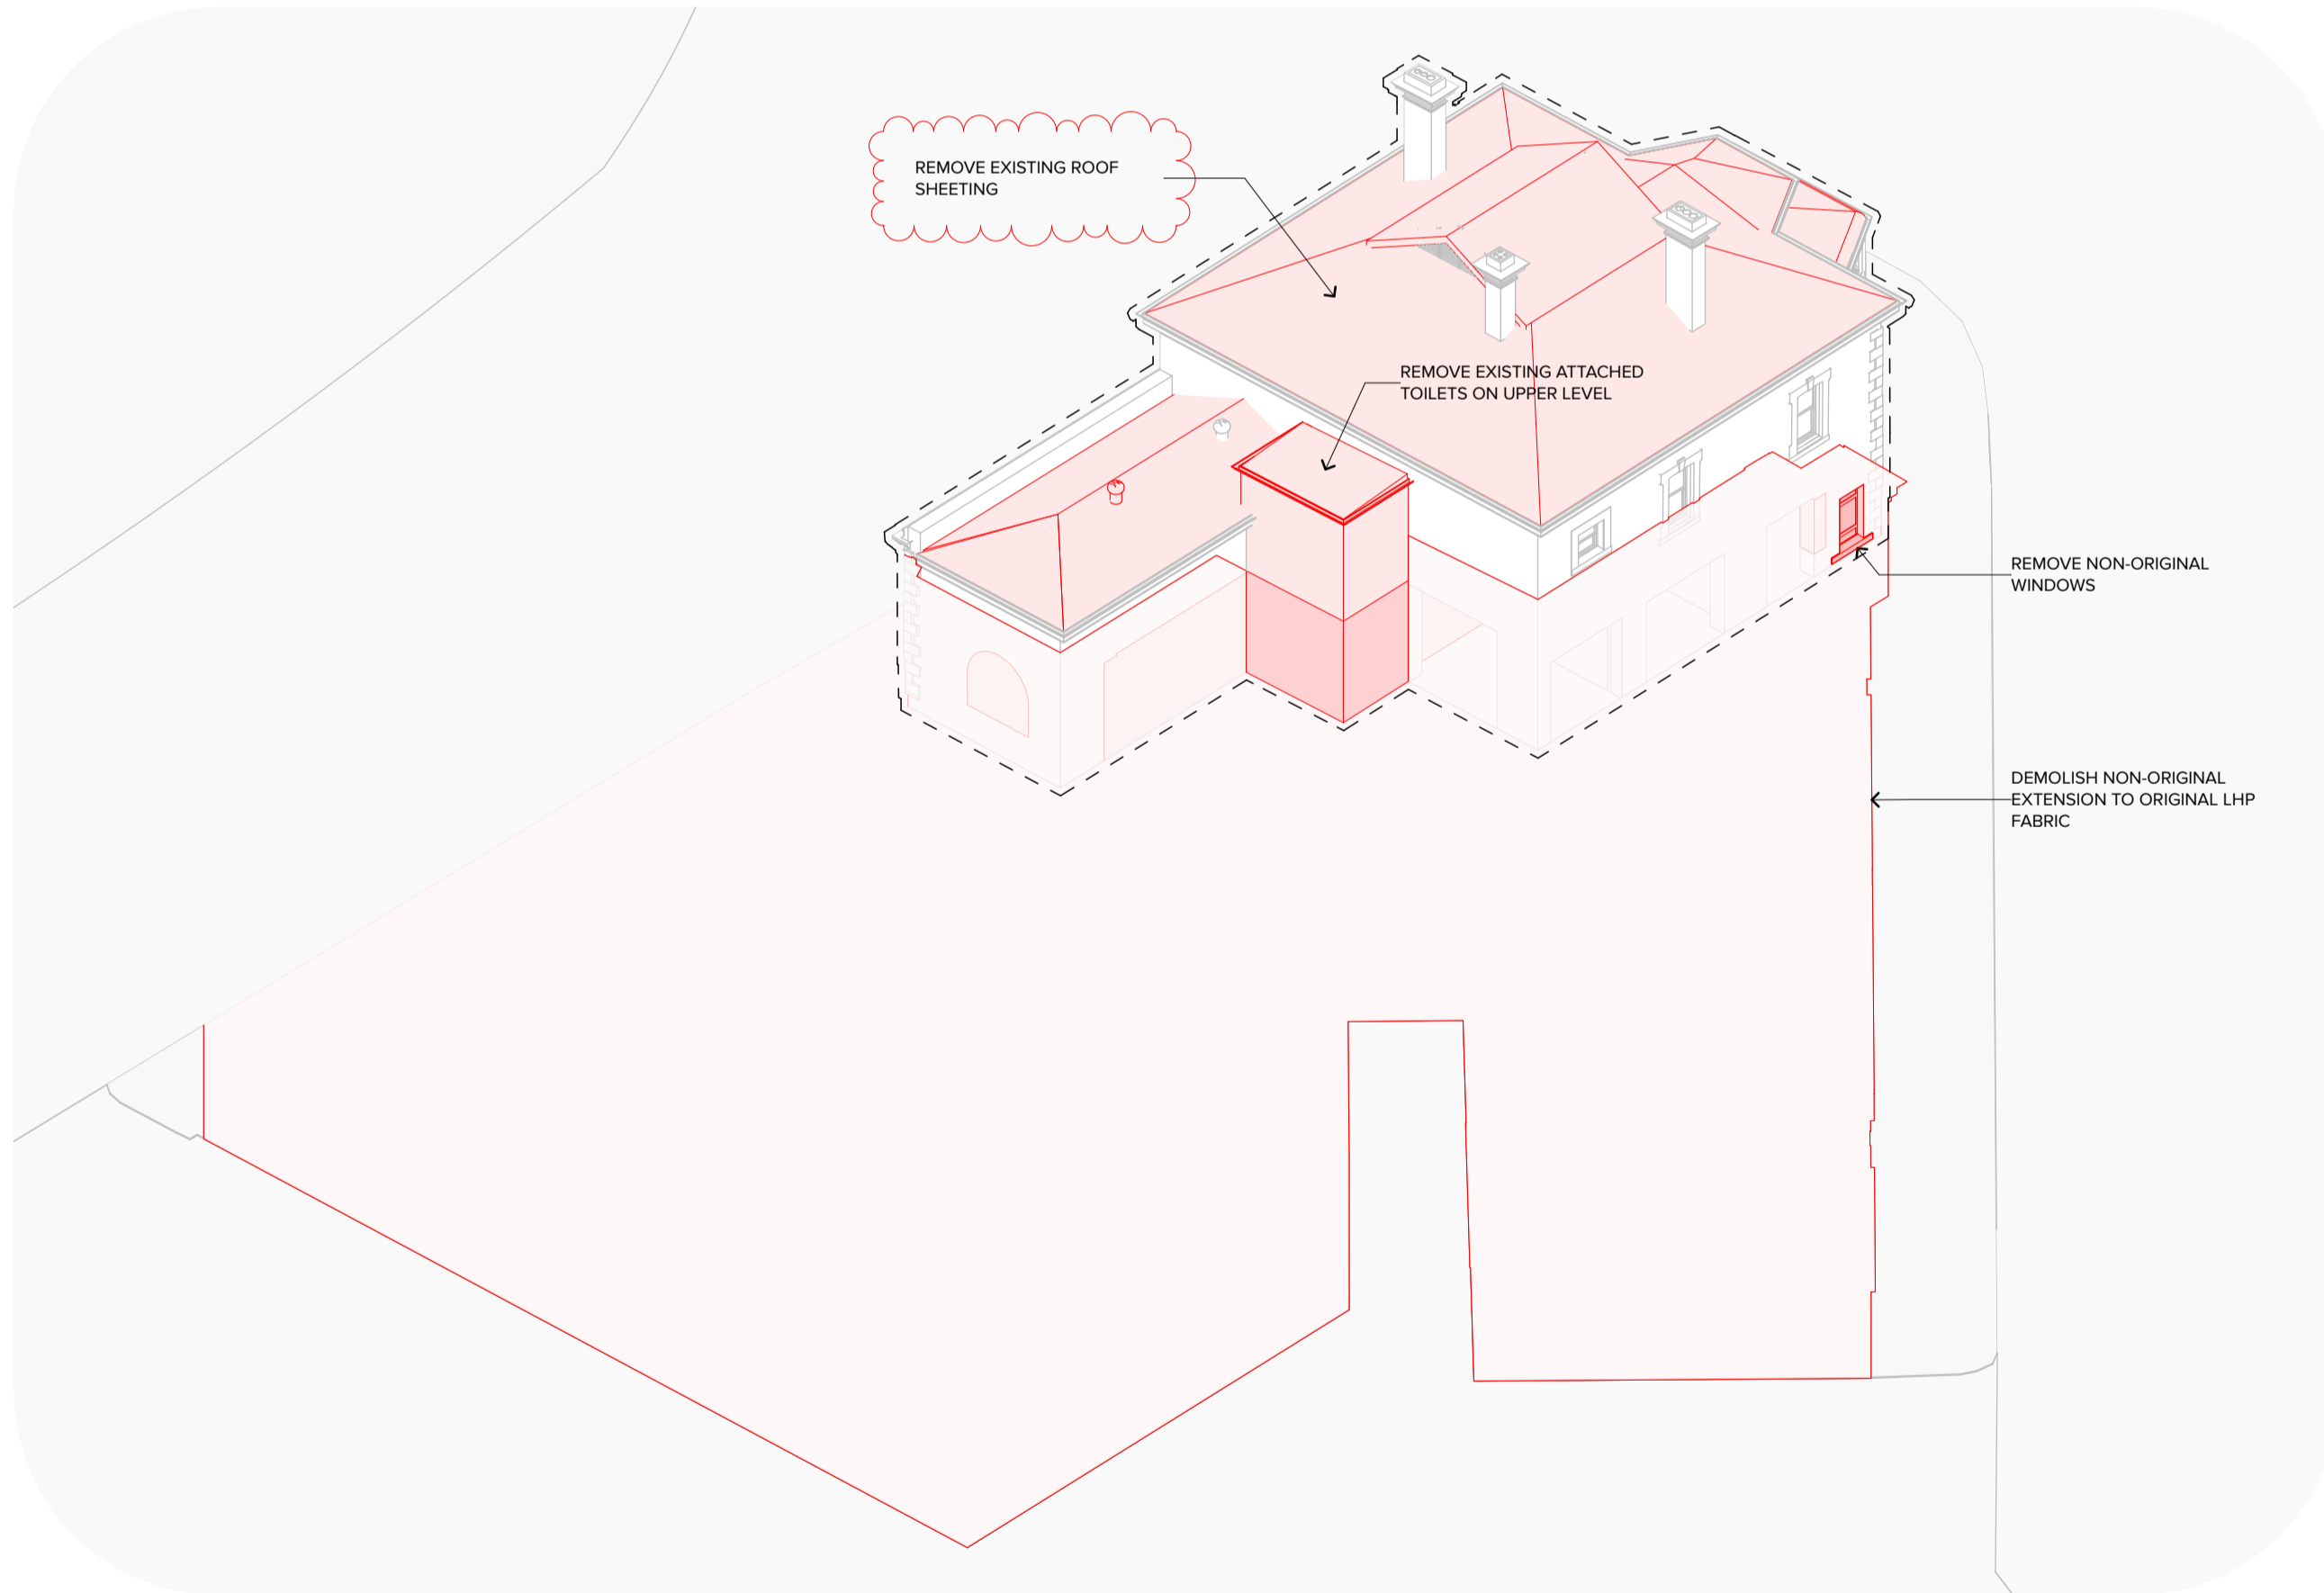


NORTH WEST CORNER

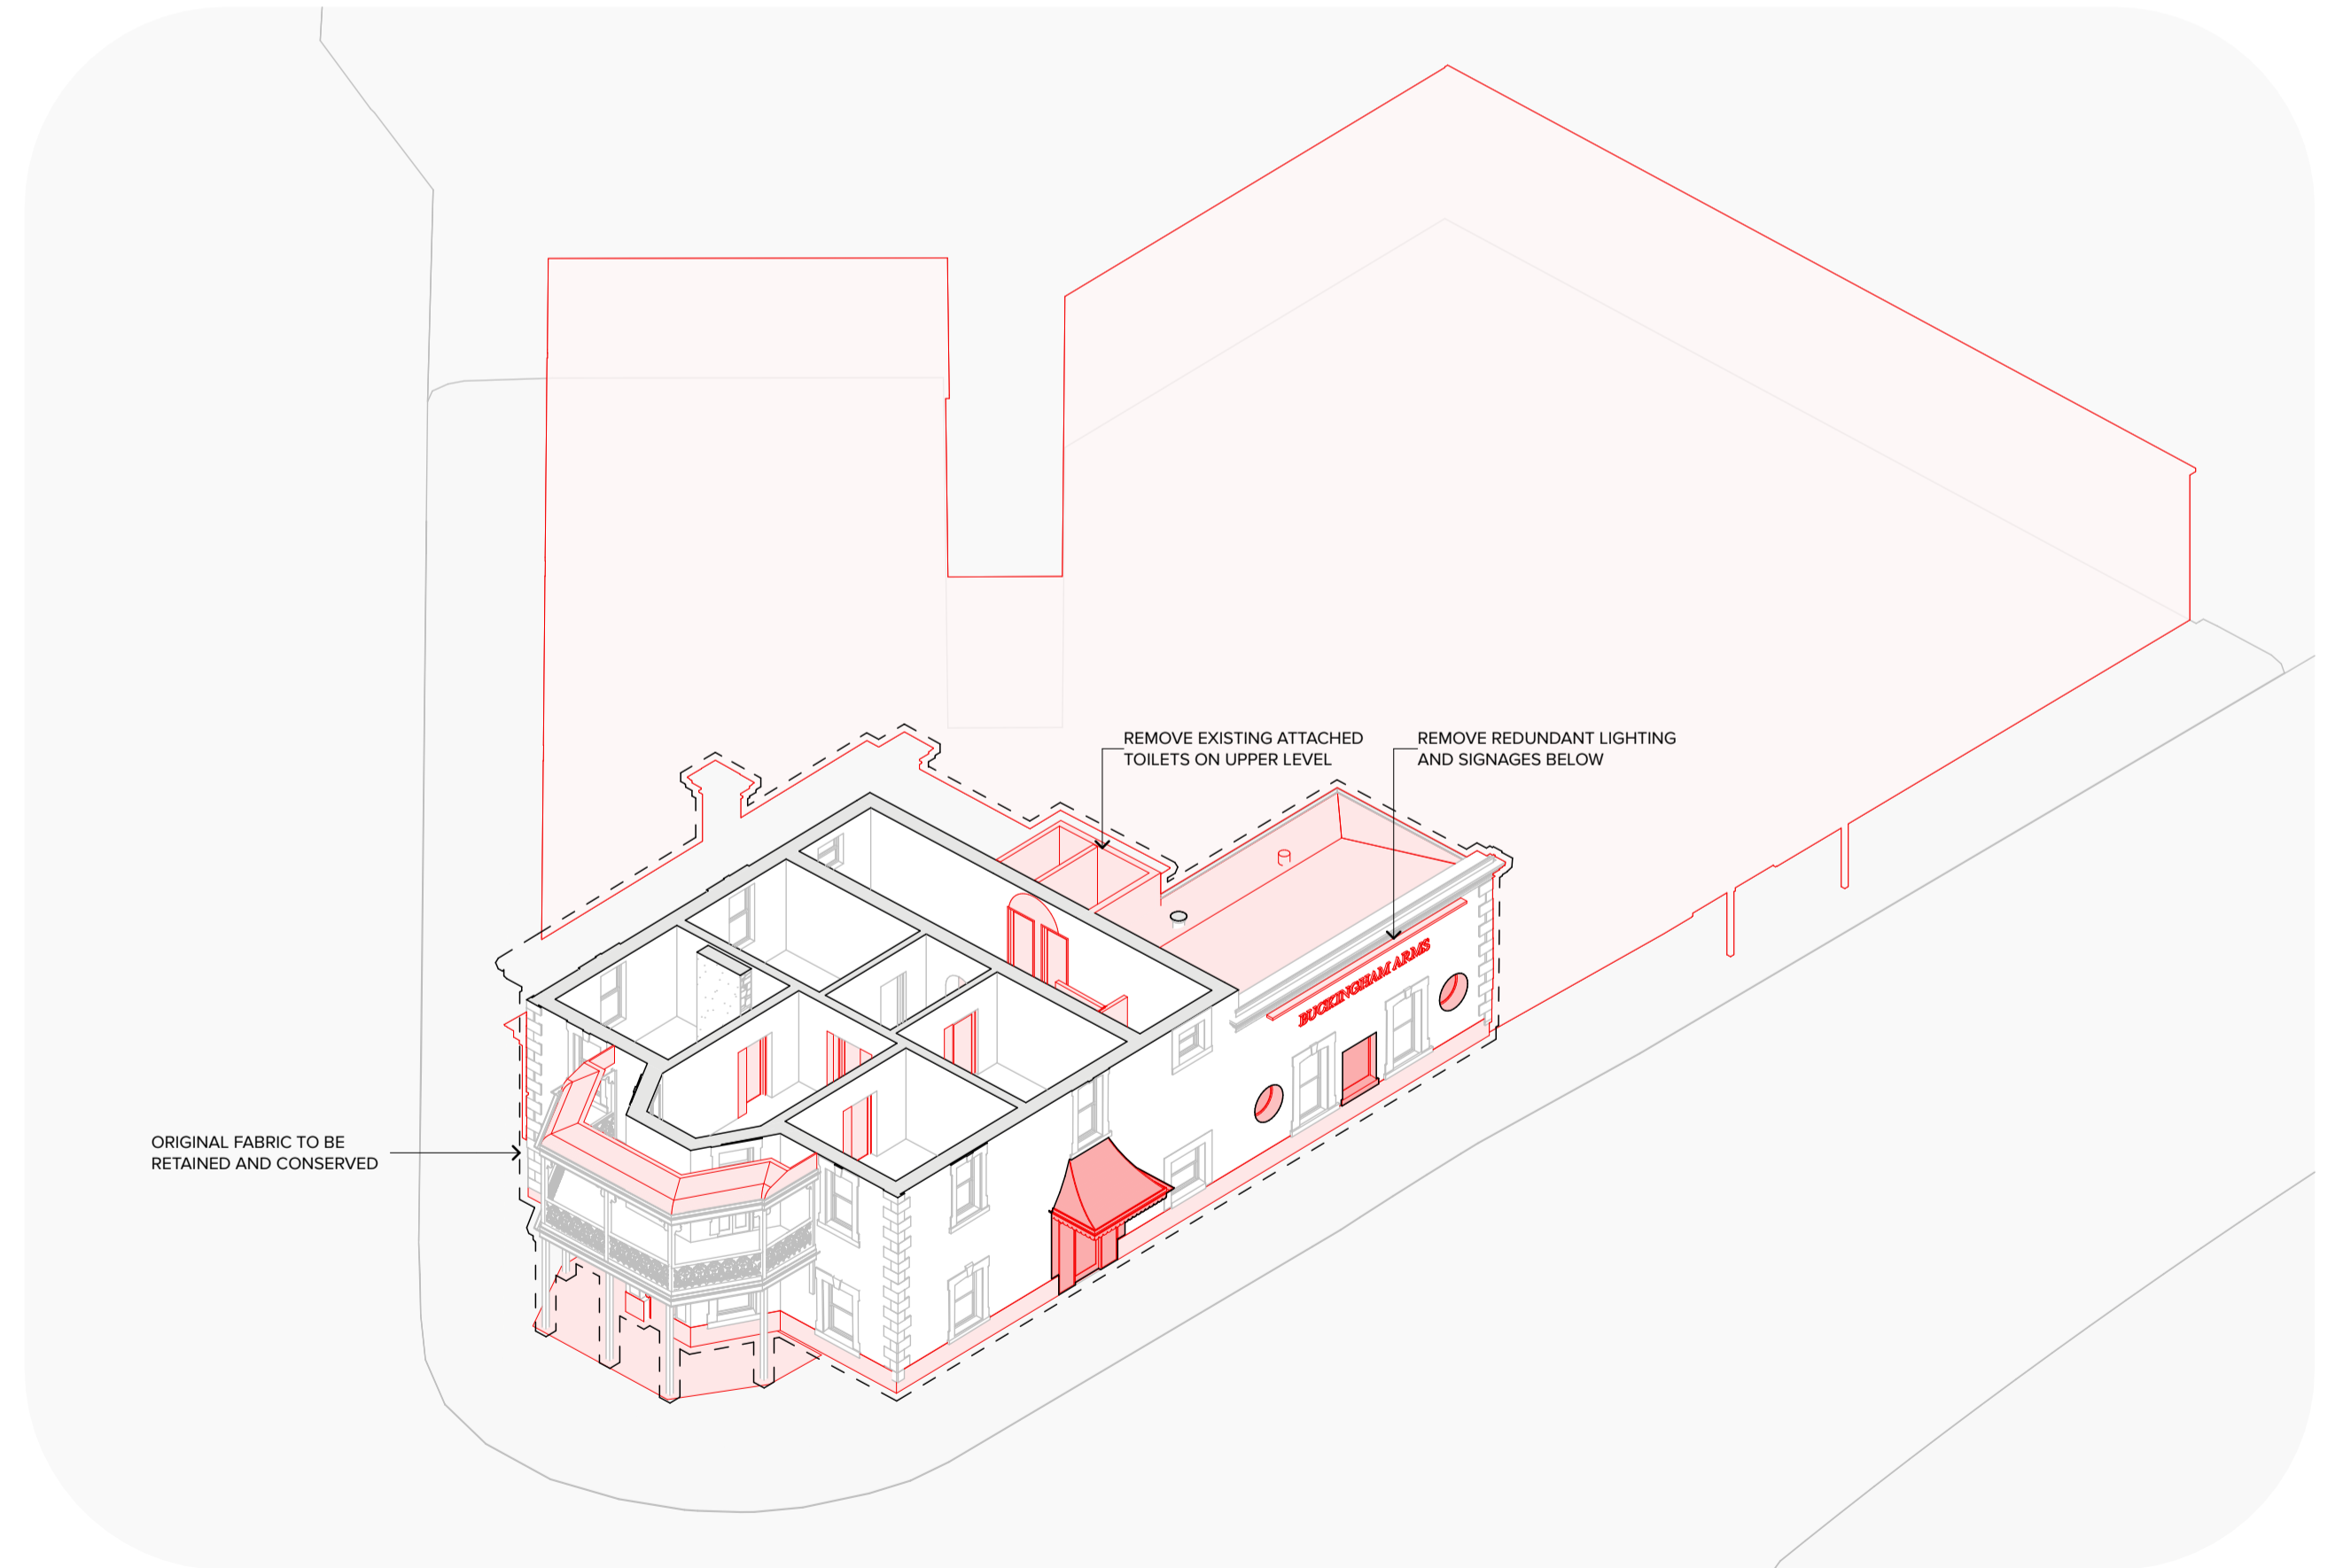

LEVEL 1 CUT PLANE

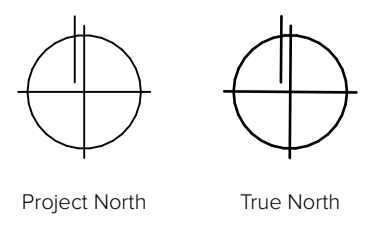

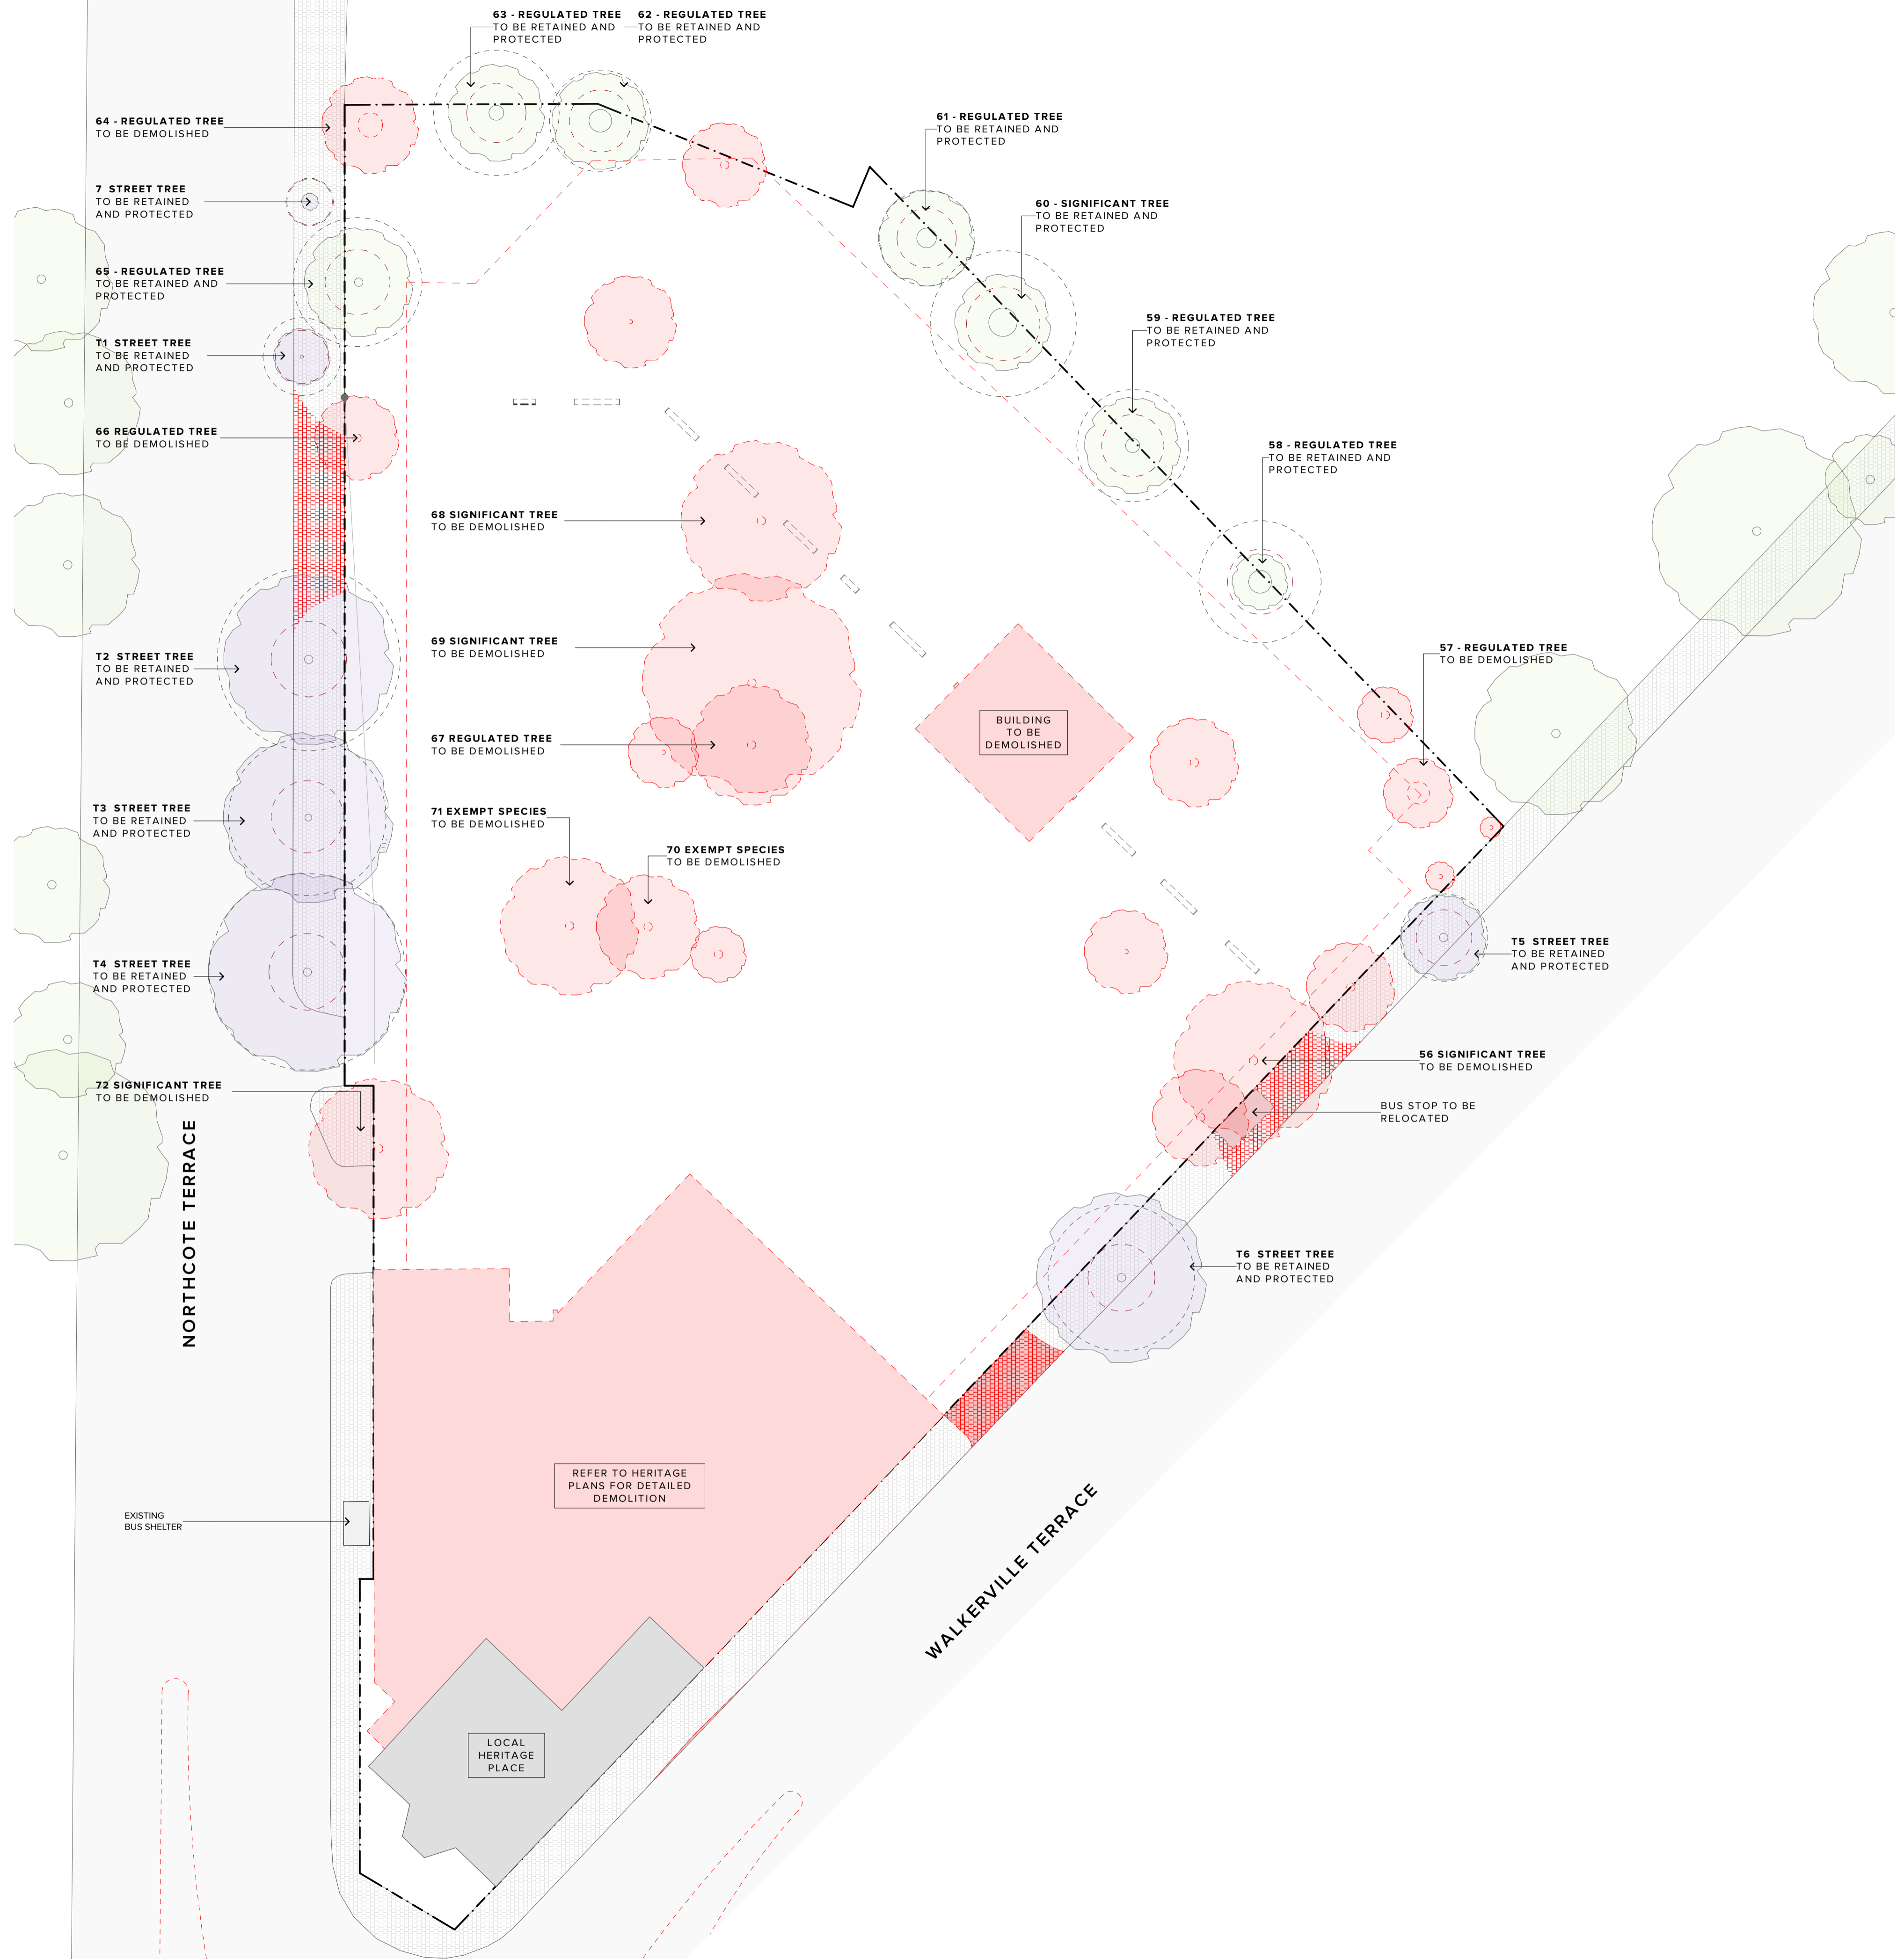




BASEMENT 2
1:750




BASEMENT 1
1:750



GROUND FLOOR
1:750

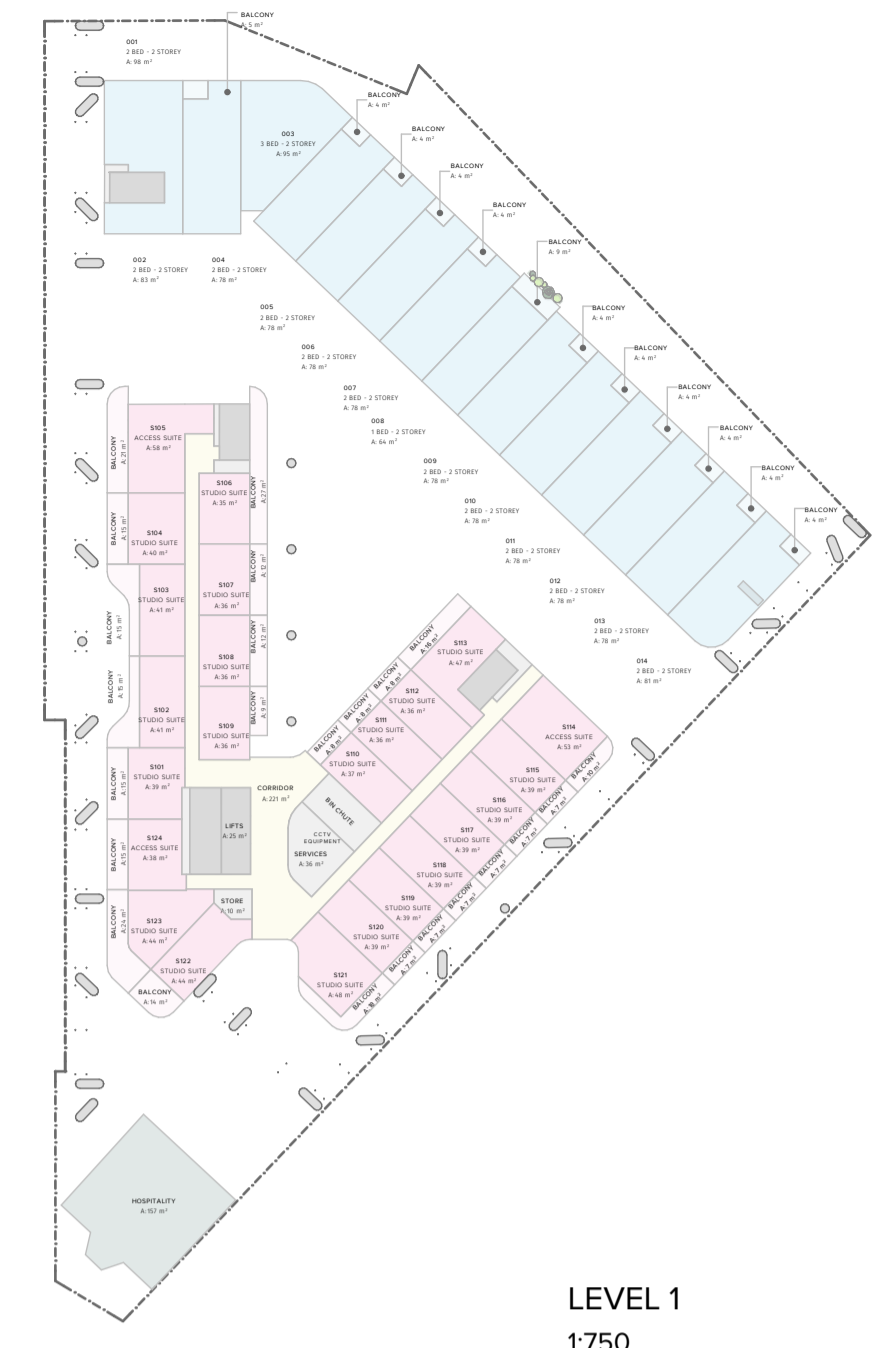

LEVEL 1
1:750

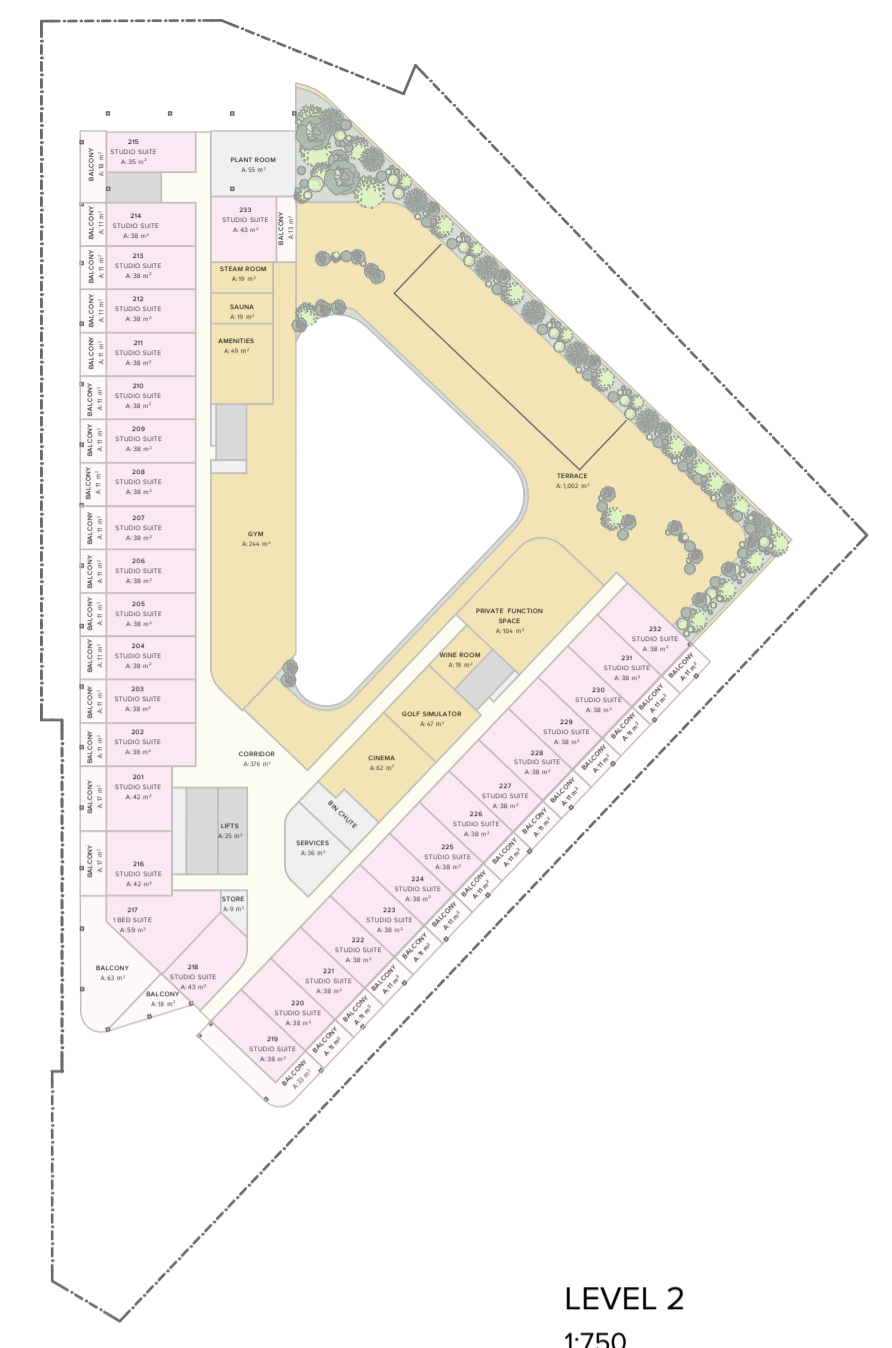

LEVEL 2
1:750



LEVEL 3
1:750



LEVEL 4
1:750



LEVEL 5
1:750



LEVEL 6
1:750




LEVEL 7
1:750



LEVEL 8
1:750



LEVEL 9
1:750

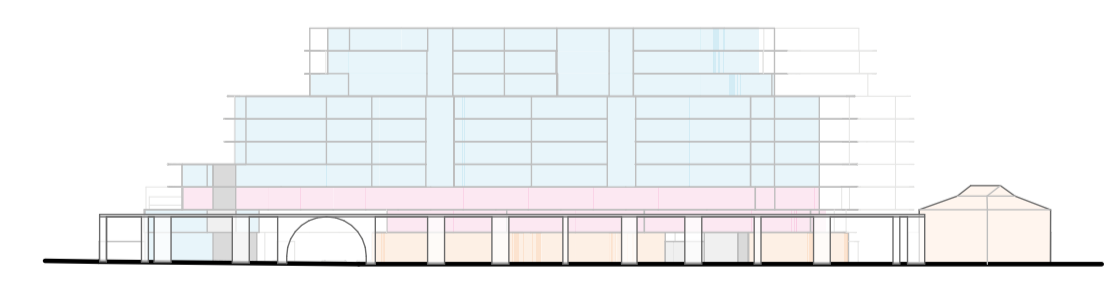

WESTERN ELEVATION

AREA SCHEDULE - OVERALL

| | AREA | | AREA |
|----------------------|--------|----------------------------|-----------------------------|
| APARTMENT | 13,541 | CORE | 1,293 |
| APARTMENT - SERVICED | 2,269 | LOCAL HERITAGE PLACE - BAR | 358 |
| BALCONY | 5,428 | PRIVATE OUTDOOR SPACE | 553 |
| BASEMENT CARPARK | 8,153 | RETAIL/HOSPITALITY | 900 |
| CIRCULATION | 2,477 | SERVICES | 1,820 |
| COMMUNAL AREAS | 1,565 | | |
| | | | 38,357 m² |

B-2 APARTMENT SCHEDULE

| | |
|------------------|------------|
| 1 BED | 20 |
| 1 BED (AH) | 14 |
| 2 BED | 12 |
| 2 BED (AH) | 6 |
| 2 BED (NDIS) | 13 |
| 2.5 BED | 8 |
| 3 BED | 34 |
| 4 BED | 9 |
| | 116 |
| 1 BED - 2 STOREY | 1 |
| 2 BED - 2 STOREY | 12 |
| 3 BED - 2 STOREY | 1 |
| | 14 |
| | 130 |

SERVICED APARTMENT SCHEDULE


| | |
|--------------|-----------|
| 1 BED SUITE | 1 |
| ACCESS SUITE | 3 |
| STUDIO SUITE | 53 |
| | 57 |


CARPARK SCHEDULE

| | |
|--------------|------------|
| BASEMENT 2 | 134 |
| BASEMENT 1 | 127 |
| GROUND FLOOR | 3 |
| | 264 |

BIKE PARK SCHEDULE

| | NO. |
|-------------------------|------------|
| BASEMENT 2 | |
| BIKE RACK - RESIDENTIAL | 132 |
| GROUND FLOOR | |
| BIKE RACK - PUBLIC | 48 |
| BIKE RACK - STAFF | 10 |
| | 165 |

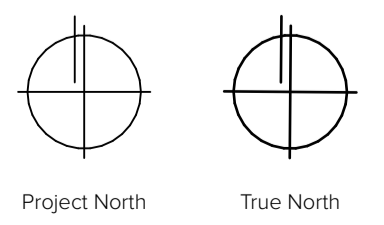


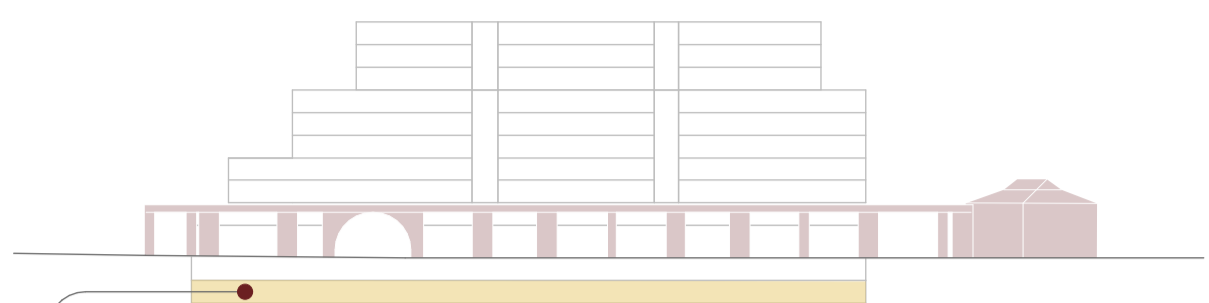



A-1-2 AREA SCHEDULE - BASEMENT 2

| NAME | AREA | NO. |
|-------------------------|----------------------------|-----------|
| BASEMENT CARPARK | | |
| CARPARK | 4,045 | 1 |
| | 4,045 m² | 1 |
| CORE | | |
| LIFT | 36 | 2 |
| STAIR | 54 | 3 |
| | 90 m² | 5 |
| SERVICES | | |
| BIKE STORE | 122 | 1 |
| MSB ROOM | 25 | 1 |
| SERVICES | 12 | 3 |
| | 159 m² | 5 |
| | 4,294 m² | 11 |

B-12 CARPARK SCHEDULE - BASEMENT


| | |
|---------|-----|
| CARPARK | 134 |
|---------|-----|

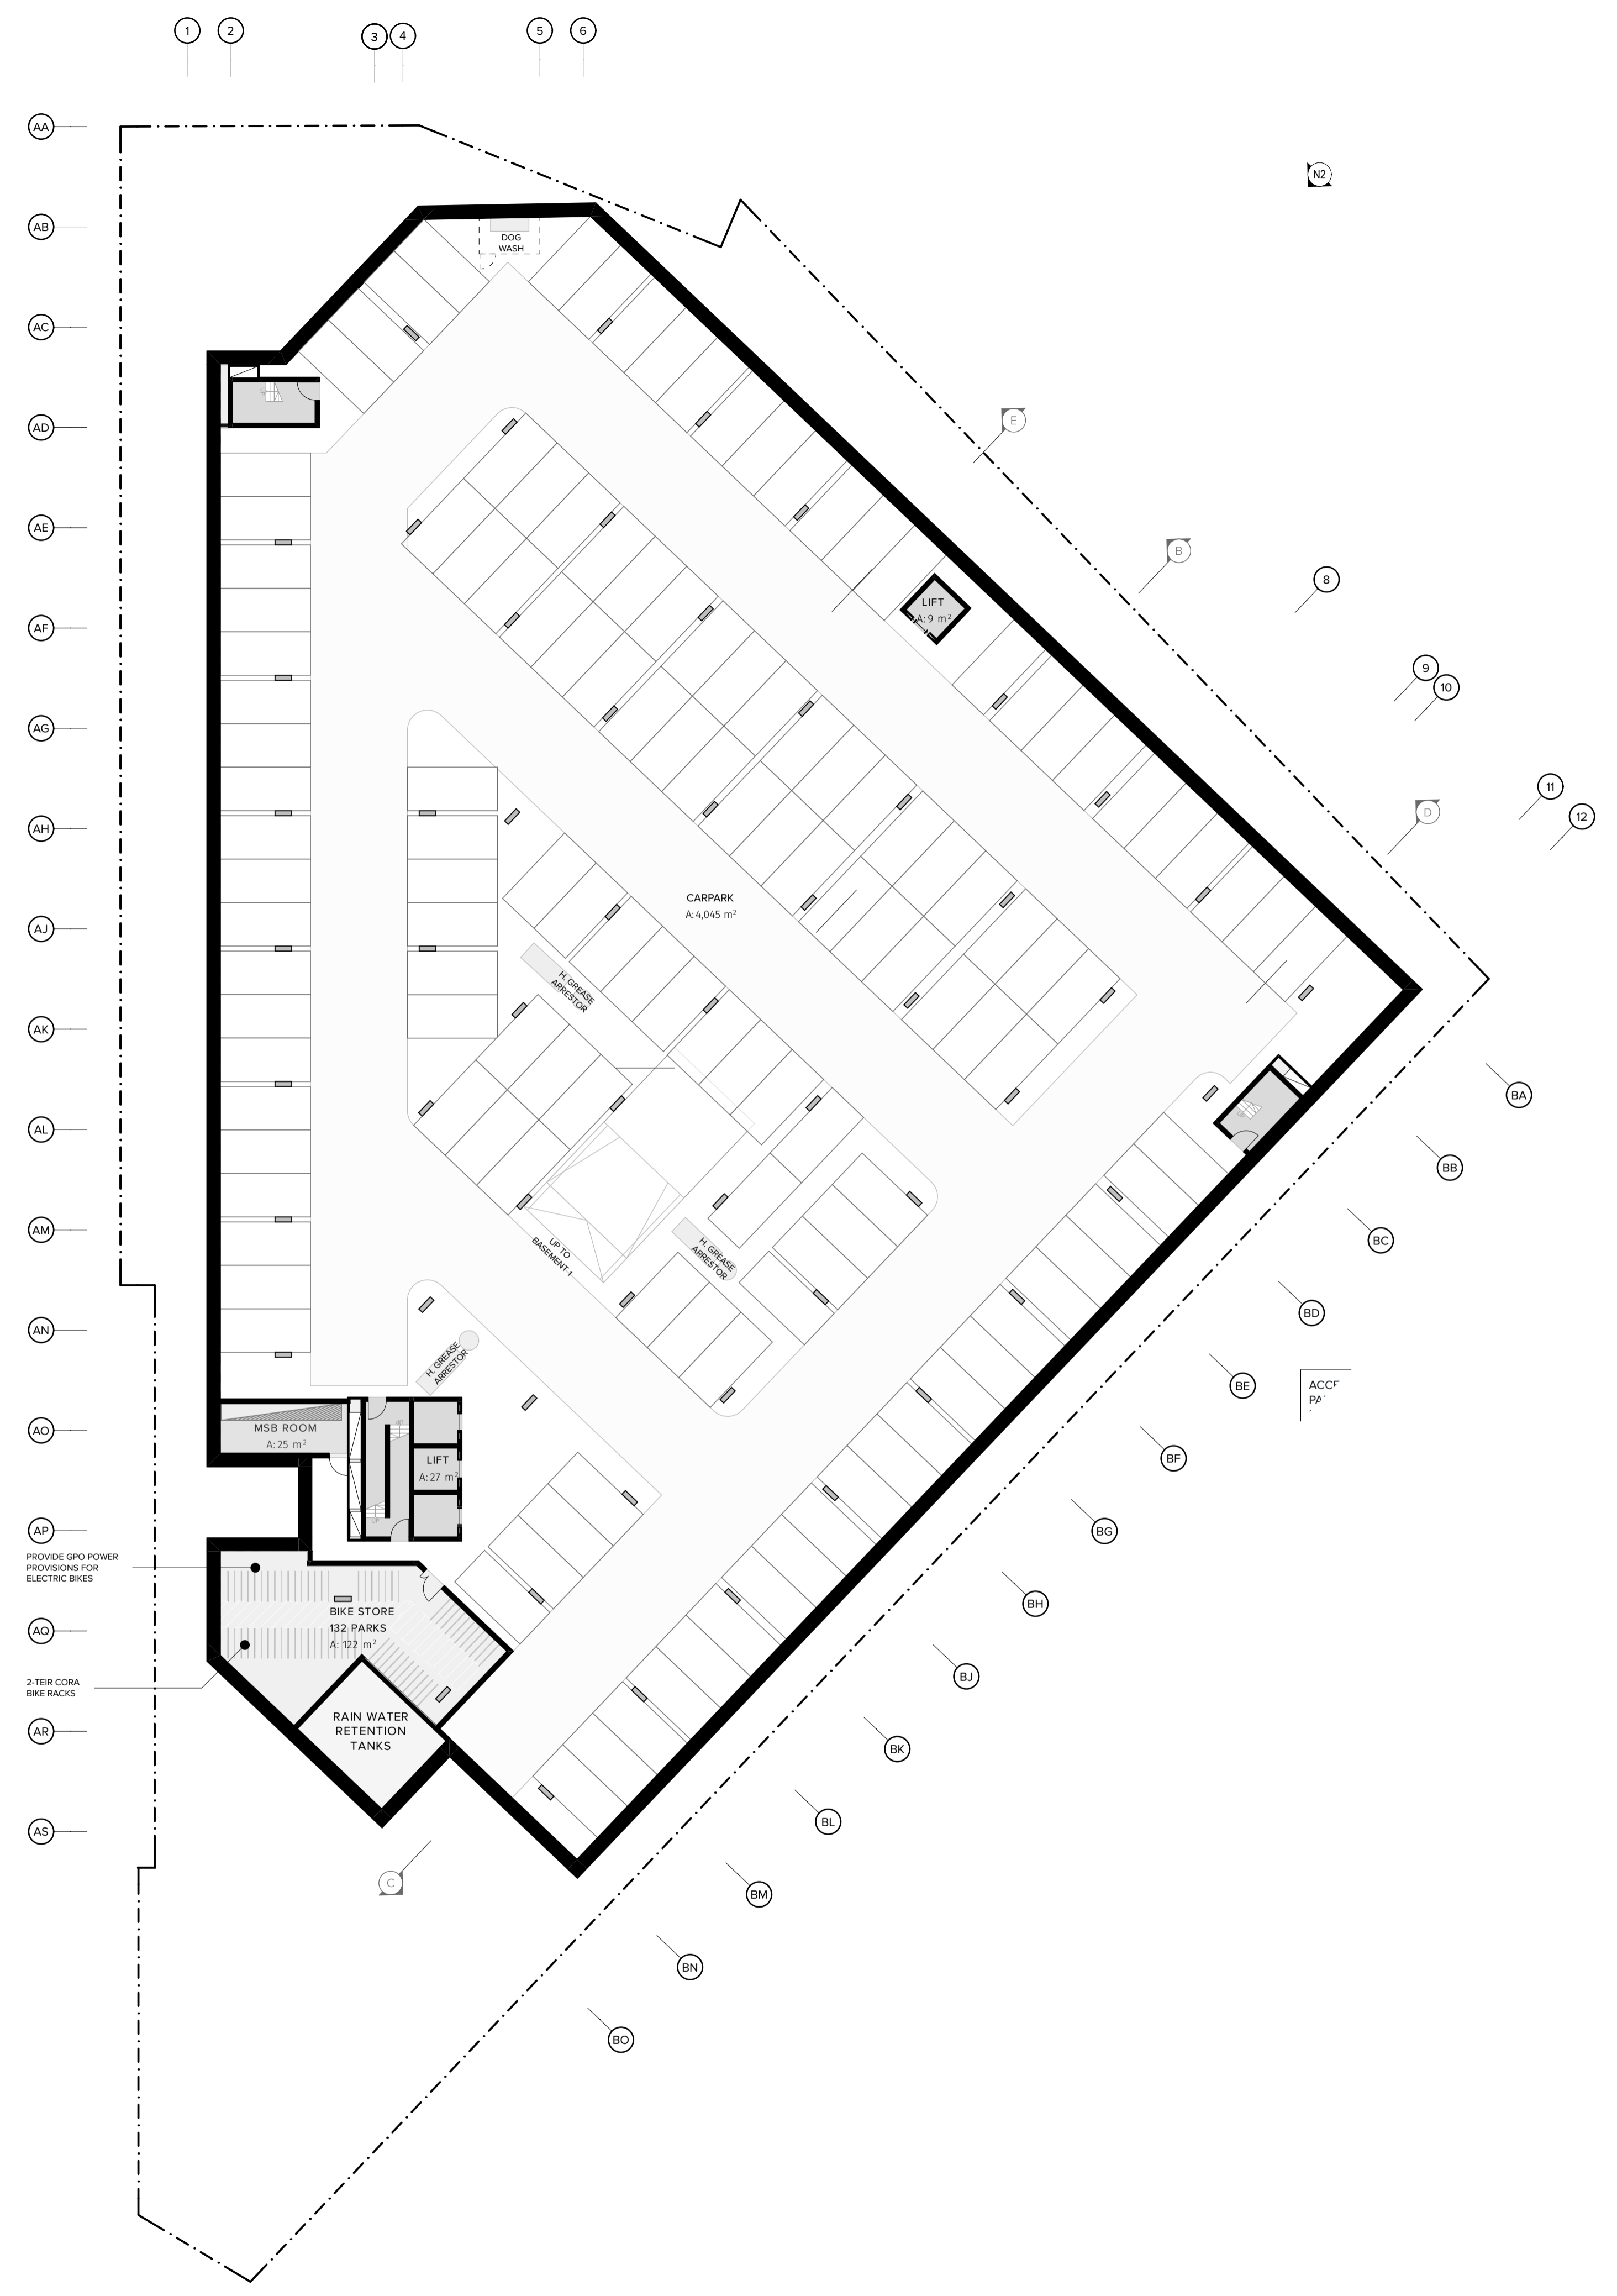

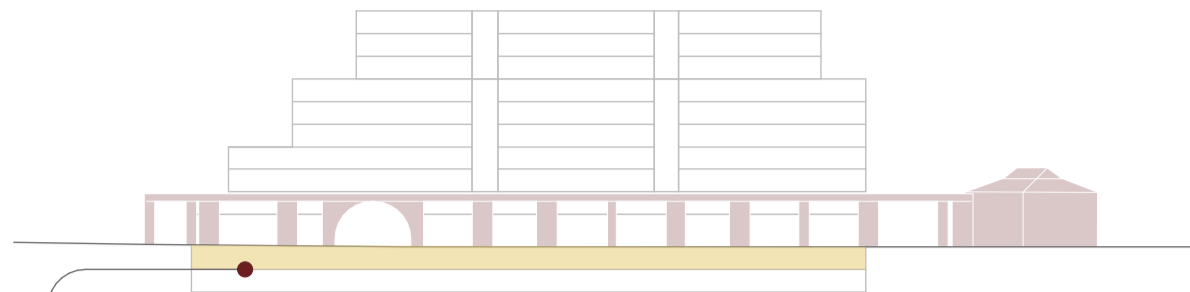


AREA SCHEDULE - BASEMENT 1


| NAME | AREA | NO. |
|---|----------------------------|-----------|
| BASEMENT CARPARK | | |
| CARPARK | 4,108 | 1 |
| | 4,108 m² | 1 |
| CORE | | |
| LIFT | 36 | 2 |
| STAIR | 54 | 3 |
| | 90 m² | 5 |
| SERVICES | | |
| SERVICES | 58 | 4 |
| | 58 m² | 4 |
| B-11 CARPARK SCHEDULE - BASEMENT 1 | | |
| | 4,256 m² | 10 |
| CARPARK | 127 | |
| | 127 | |

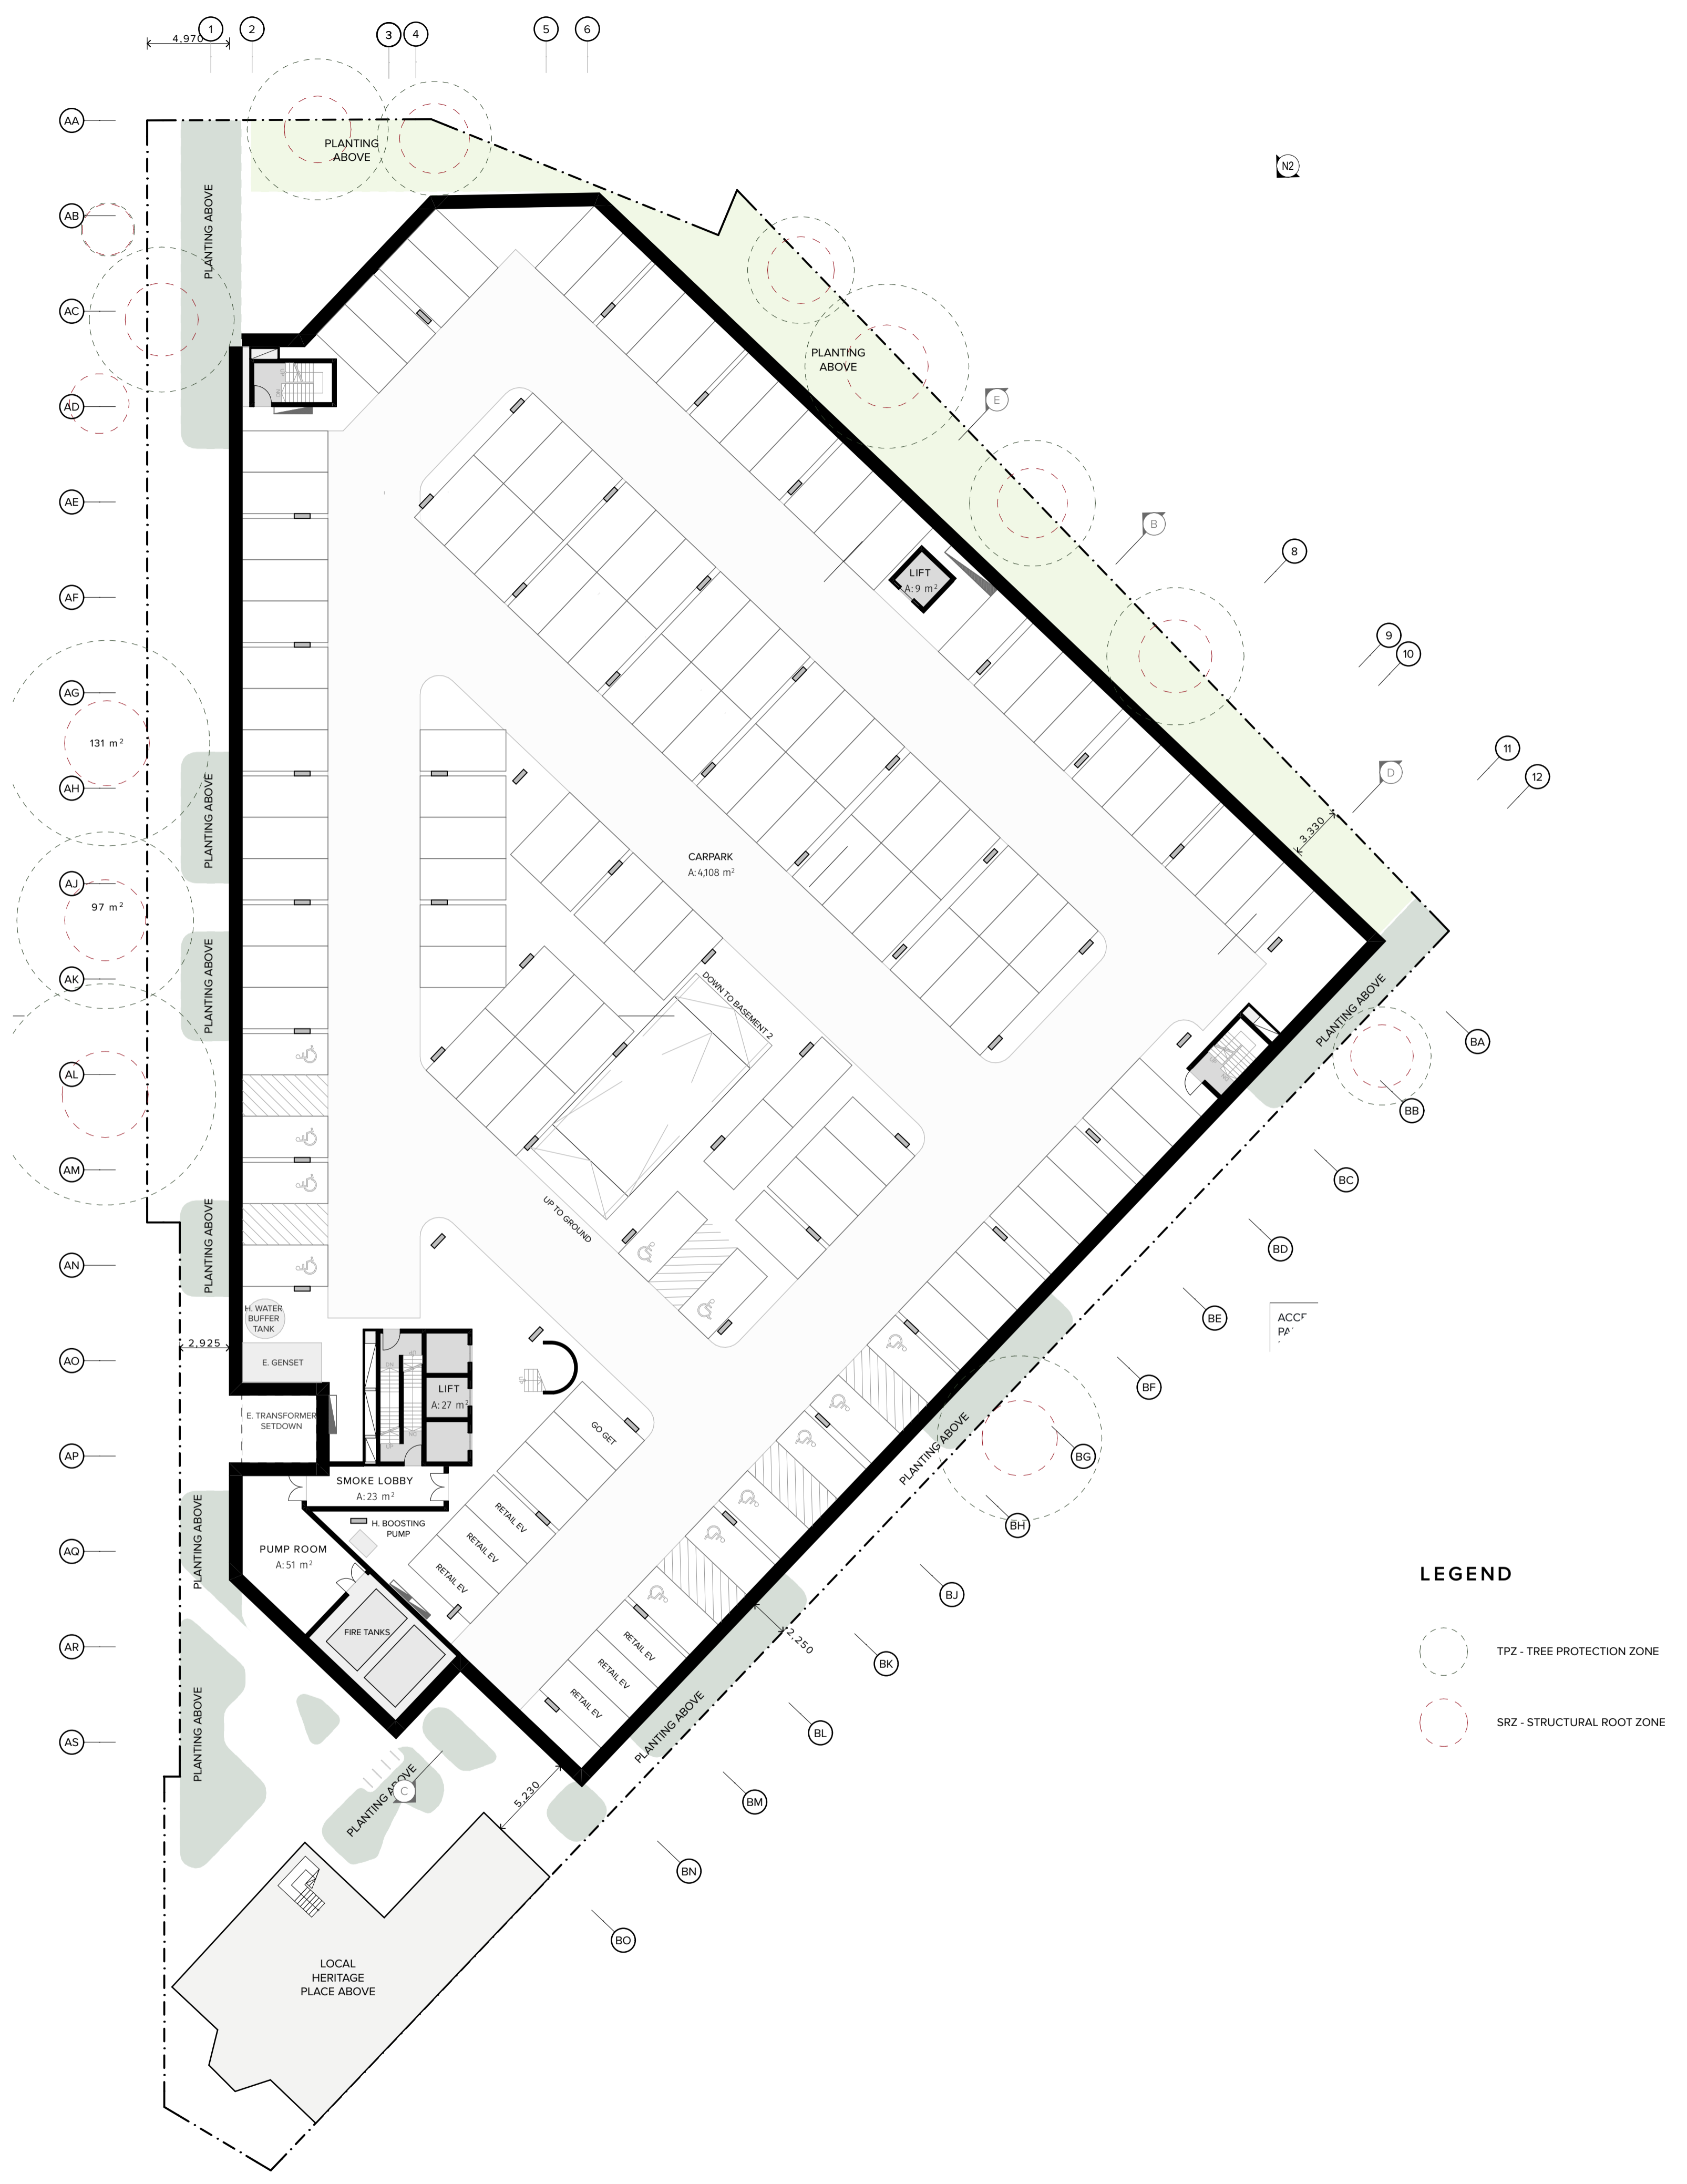

LEGEND


- TPZ - TREE PROTECTION ZONE
- SRZ - STRUCTURAL ROOT ZONE



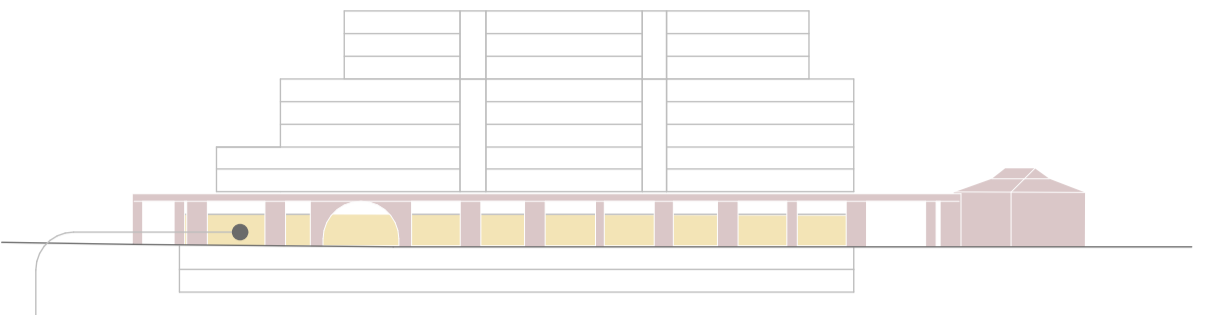



| AREA SCHEDULE - GROUND | | |
|-----------------------------------|-----------|-----|
| NAME | AREA | NO. |
| APARTMENT | | |
| LIVING | 917 | 14 |
| 917 m² | 14 | |
| CIRCULATION | | |
| LOBBY | 269 | 2 |
| 269 m² | 2 | |
| CORE | | |
| BIKE STORE | 68 | 1 |
| END OF TRIP | 14 | 1 |
| LIFT | 36 | 2 |
| STAIR | 125 | 5 |
| WASTE ROOM | 18 | 1 |
| 261 m² | 10 | |
| LOCAL HERITAGE PLACE - BAR | | |
| BAR | 201 | 1 |
| 201 m² | 1 | |
| PRIVATE OUTDOOR SPACE | | |
| P.O.S. | 553 | 13 |
| 553 m² | 13 | |
| RETAIL/HOSPITALITY | | |
| CAFE | 147 | 1 |
| RESTAURANT | 355 | 2 |
| RESTAURANT / BAR | 398 | 1 |
| 900 m² | 4 | |
| SERVICES | | |
| BATHROOMS | 110 | 3 |
| BMO | 16 | 1 |
| CONTROL | 36 | 1 |
| KITCHEN | 153 | 4 |
| LIFT | 13 | 3 |
| LOADING BAY | 66 | 1 |
| SERVICES | 21 | 2 |
| STAFF BIKES | 11 | 1 |
| STAFF EOT | 21 | 1 |
| TRANSFORMER | 22 | 1 |
| WASTE ROOM | 123 | 1 |
| 592 m² | 19 | |
| 3,693 m² | 63 | |

| B-2-O APARTMENT SCHEDULE - GROUND | | | | |
|-----------------------------------|--------------|-----------------------|------|--|
| APT. NUMBER | LEVEL | DESCRIPTION | AREA | |
| 001, 2 BED - 2 STOREY | | | | |
| | GROUND FLOOR | APARTMENT | 88 | |
| | GROUND FLOOR | PRIVATE OUTDOOR SPACE | 44 | |
| | LEVEL 1 | APARTMENT | 98 | |
| 002, 2 BED - 2 STOREY | | | | |
| | GROUND FLOOR | APARTMENT | 68 | |
| | GROUND FLOOR | PRIVATE OUTDOOR SPACE | 34 | |
| | LEVEL 1 | APARTMENT | 83 | |
| | LEVEL 1 | BALCONY | 5 | |
| 003, 3 BED - 2 STOREY | | | | |
| | GROUND FLOOR | APARTMENT | 93 | |
| | GROUND FLOOR | PRIVATE OUTDOOR SPACE | 50 | |
| | LEVEL 1 | APARTMENT | 95 | |
| 004, 2 BED - 2 STOREY | | | | |
| | GROUND FLOOR | APARTMENT | 67 | |
| | GROUND FLOOR | PRIVATE OUTDOOR SPACE | 42 | |
| | LEVEL 1 | APARTMENT | 78 | |
| | LEVEL 1 | BALCONY | 4 | |
| 005, 2 BED - 2 STOREY | | | | |
| | GROUND FLOOR | APARTMENT | 67 | |
| | GROUND FLOOR | PRIVATE OUTDOOR SPACE | 46 | |
| | LEVEL 1 | APARTMENT | 78 | |
| | LEVEL 1 | BALCONY | 4 | |
| 006, 2 BED - 2 STOREY | | | | |
| | GROUND FLOOR | APARTMENT | 67 | |
| | GROUND FLOOR | PRIVATE OUTDOOR SPACE | 45 | |
| | LEVEL 1 | APARTMENT | 78 | |
| | LEVEL 1 | BALCONY | 4 | |
| 007, 2 BED - 2 STOREY | | | | |
| | GROUND FLOOR | APARTMENT | 68 | |
| | GROUND FLOOR | PRIVATE OUTDOOR SPACE | 60 | |
| | LEVEL 1 | APARTMENT | 78 | |
| | LEVEL 1 | BALCONY | 4 | |
| 008, 1 BED - 2 STOREY | | | | |
| | GROUND FLOOR | APARTMENT | 8 | |
| | LEVEL 1 | APARTMENT | 64 | |
| | LEVEL 1 | BALCONY | 9 | |
| 009, 2 BED - 2 STOREY | | | | |
| | GROUND FLOOR | APARTMENT | 67 | |
| | GROUND FLOOR | PRIVATE OUTDOOR SPACE | 52 | |
| | LEVEL 1 | APARTMENT | 78 | |
| | LEVEL 1 | BALCONY | 4 | |
| 010, 2 BED - 2 STOREY | | | | |
| | GROUND FLOOR | APARTMENT | 67 | |
| | GROUND FLOOR | PRIVATE OUTDOOR SPACE | 39 | |
| | LEVEL 1 | APARTMENT | 78 | |
| | LEVEL 1 | BALCONY | 4 | |
| 011, 2 BED - 2 STOREY | | | | |
| | GROUND FLOOR | APARTMENT | 67 | |
| | GROUND FLOOR | PRIVATE OUTDOOR SPACE | 37 | |
| | LEVEL 1 | APARTMENT | 78 | |
| | LEVEL 1 | BALCONY | 4 | |
| 012, 2 BED - 2 STOREY | | | | |
| | GROUND FLOOR | APARTMENT | 67 | |
| | GROUND FLOOR | PRIVATE OUTDOOR SPACE | 36 | |
| | LEVEL 1 | APARTMENT | 78 | |
| | LEVEL 1 | BALCONY | 4 | |
| 013, 2 BED - 2 STOREY | | | | |
| | GROUND FLOOR | APARTMENT | 67 | |
| | GROUND FLOOR | PRIVATE OUTDOOR SPACE | 34 | |
| | LEVEL 1 | APARTMENT | 78 | |
| | LEVEL 1 | BALCONY | 4 | |
| 014, 2 BED - 2 STOREY | | | | |
| | GROUND FLOOR | APARTMENT | 56 | |
| | GROUND FLOOR | PRIVATE OUTDOOR SPACE | 34 | |
| | LEVEL 1 | APARTMENT | 81 | |
| | LEVEL 1 | BALCONY | 4 | |

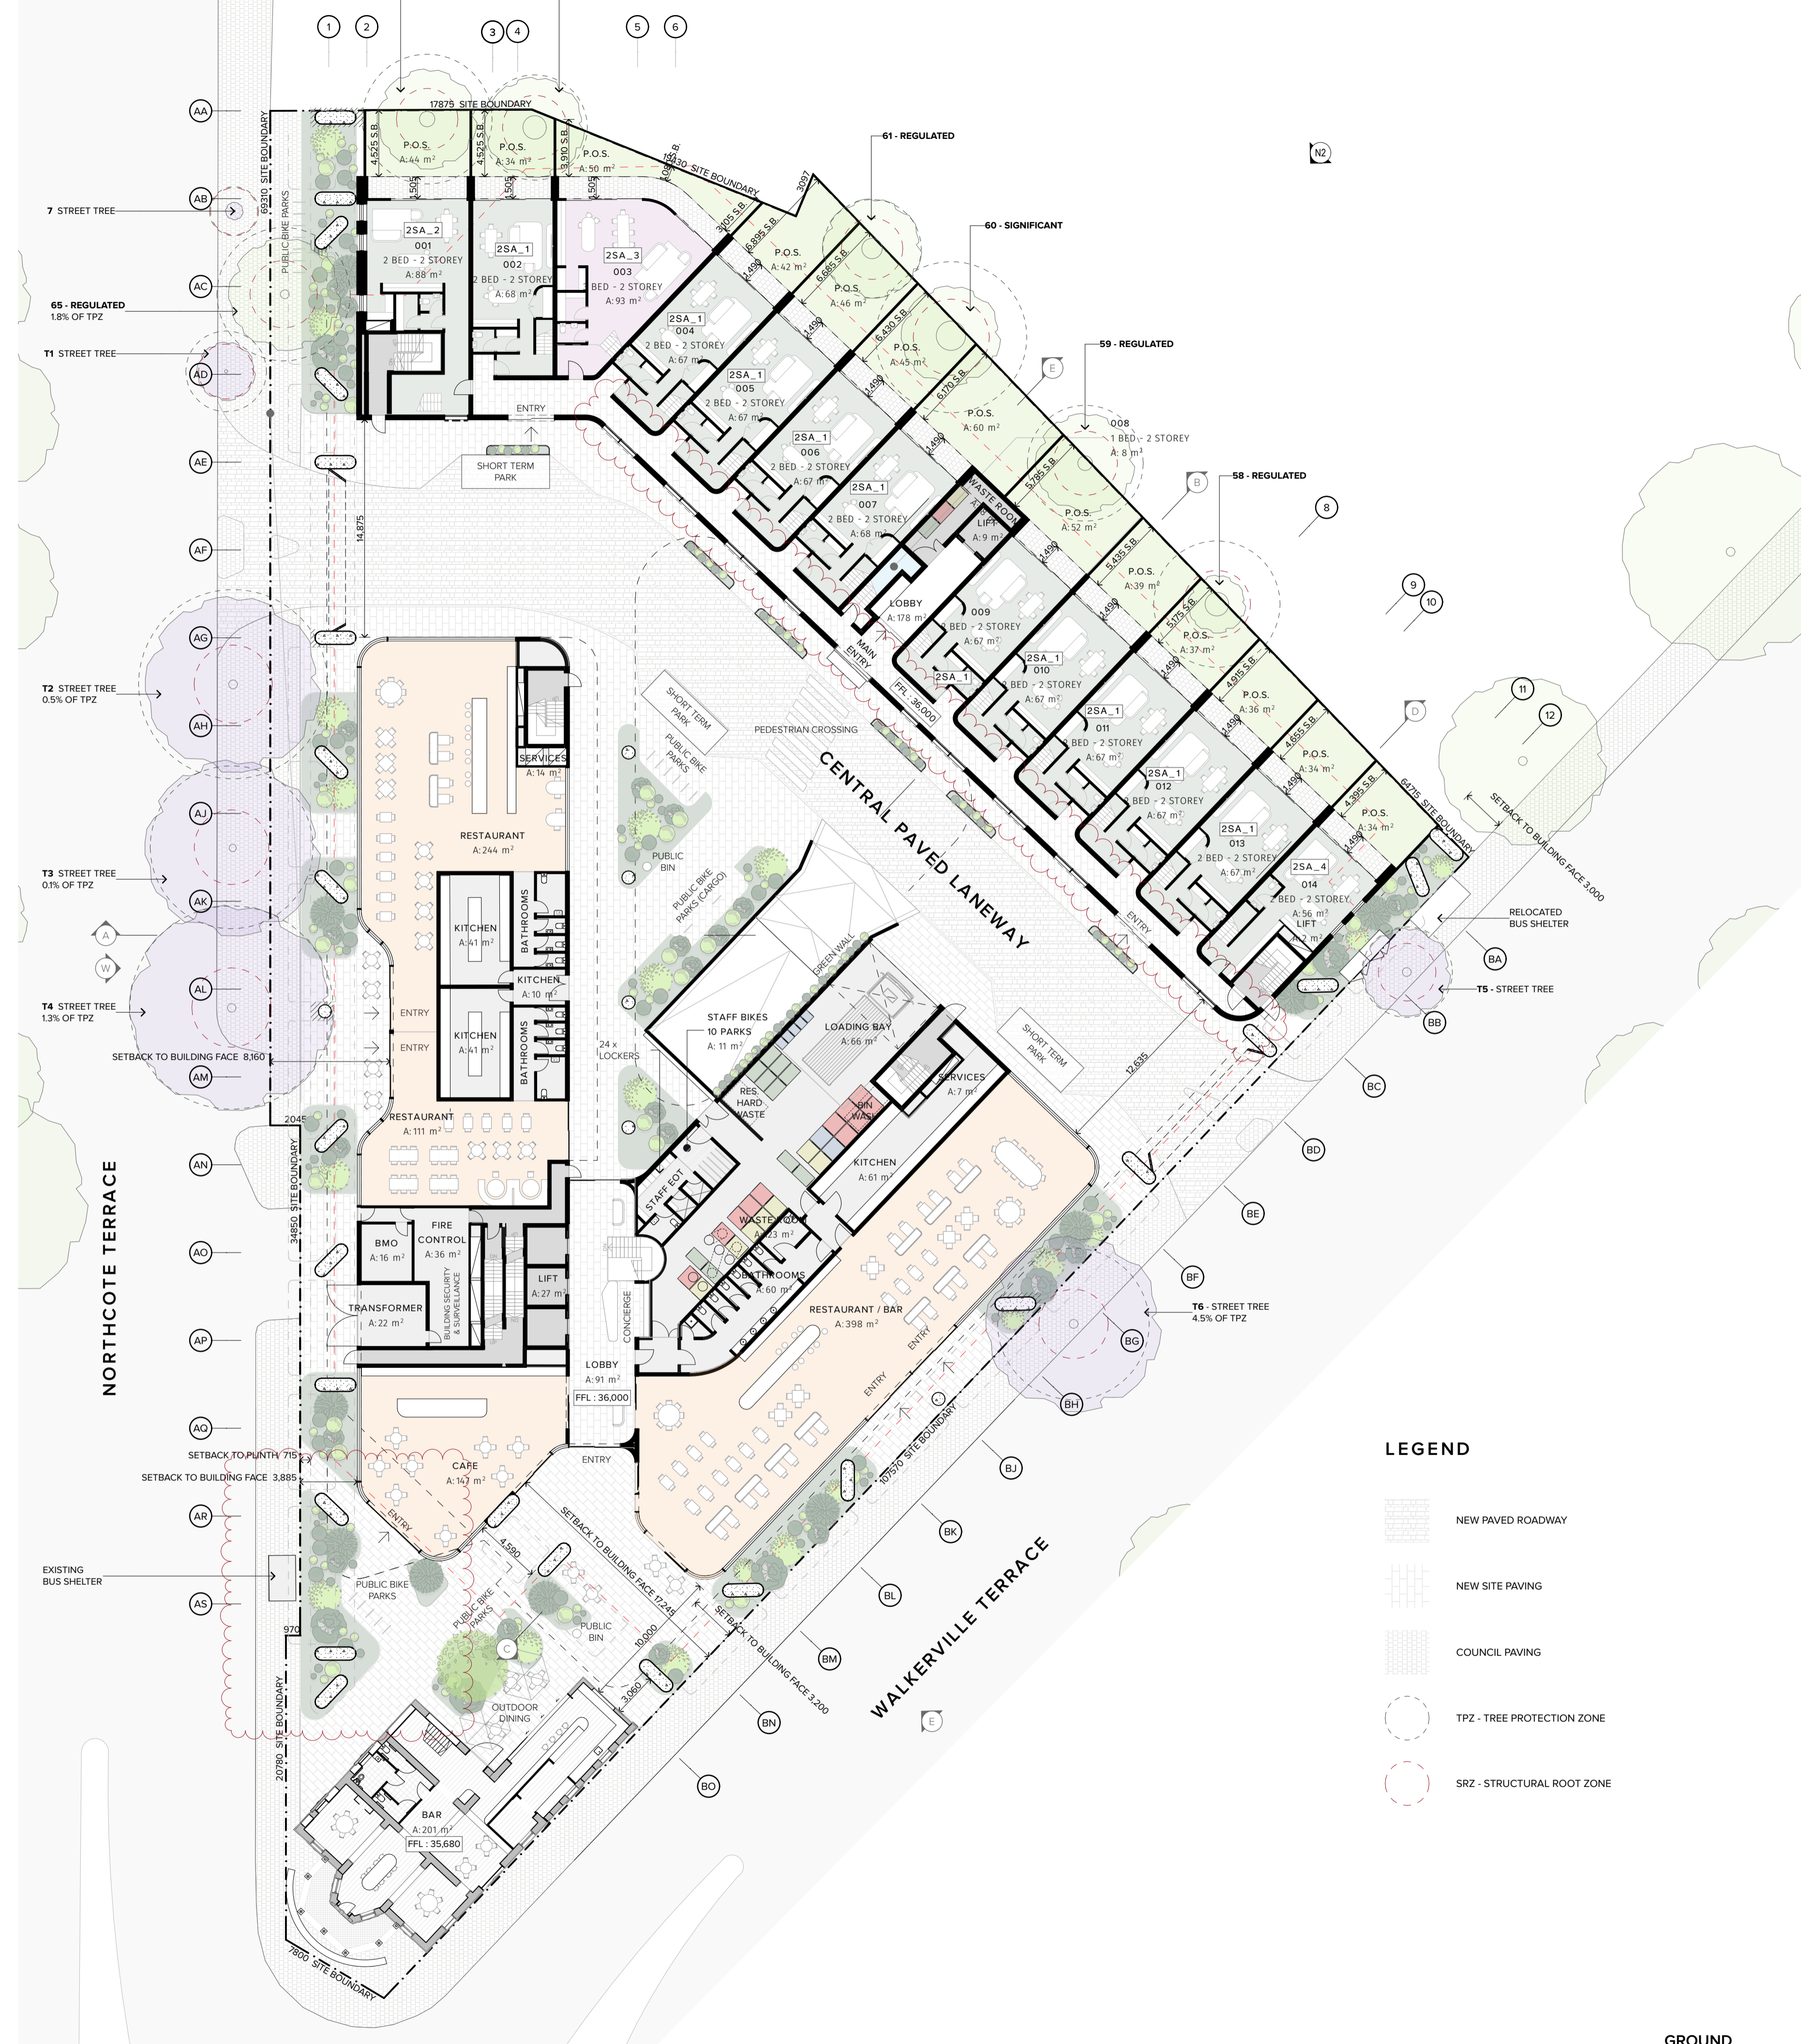

| LEGEND | |
|----------|----------------------------|
| [Symbol] | NEW PAVED ROADWAY |
| [Symbol] | NEW SITE PAVING |
| [Symbol] | COUNCIL PAVING |
| [Symbol] | TPZ - TREE PROTECTION ZONE |
| [Symbol] | SRZ - STRUCTURAL ROOT ZONE |



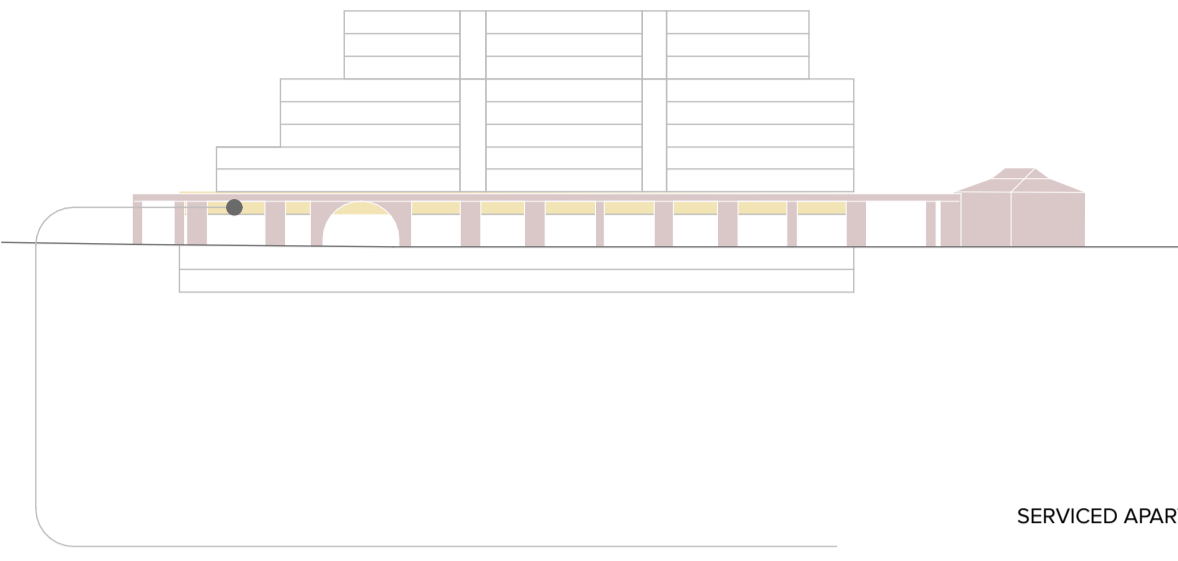

| AREA SCHEDULE - LEVEL 1 | | |
|-----------------------------------|----------------------------|-----------|
| NAME | AREA | NO. |
| APARTMENT | | |
| LIVING | 1,123 | 14 |
| | 1,123 m² | 14 |
| APARTMENT - SERVICED | | |
| ACCESS SUITE | 149 | 3 |
| STUDIO SUITE | 830 | 21 |
| | 979 m² | 24 |
| BALCONY | | |
| BALCONY | 358 | 36 |
| | 358 m² | 36 |
| CIRCULATION | | |
| CORRIDOR | 221 | 1 |
| | 221 m² | 1 |
| CORE | | |
| LIFTS | 25 | 1 |
| STAIR | 77 | 4 |
| | 102 m² | 5 |
| LOCAL HERITAGE PLACE - BAR | | |
| HOSPITALITY | 157 | 1 |
| | 157 m² | 1 |
| SERVICES | | |
| BIN CHUTE | 28 | 1 |
| SERVICES | 62 | 7 |
| STORE | 10 | 1 |
| | 100 m² | 9 |
| | 3,040 m² | 90 |


| SERVICED APARTMENT SCHEDULE - LEVEL 1 | | | |
|---------------------------------------|--------------|----------------------|----|
| APT. NUMBER | | AREA | |
| S101, SERVICED ACCOMODATION | | | |
| | BALCONY | BALCONY | 15 |
| | STUDIO SUITE | APARTMENT - SERVICED | 39 |
| S102, SERVICED ACCOMODATION | | | |
| | BALCONY | BALCONY | 15 |
| | STUDIO SUITE | APARTMENT - SERVICED | 41 |
| S103, SERVICED ACCOMODATION | | | |
| | BALCONY | BALCONY | 15 |
| | STUDIO SUITE | APARTMENT - SERVICED | 41 |
| S104, SERVICED ACCOMODATION | | | |
| | BALCONY | BALCONY | 15 |
| | STUDIO SUITE | APARTMENT - SERVICED | 40 |
| S105, SERVICED ACCOMODATION | | | |
| | ACCESS SUITE | APARTMENT - SERVICED | 58 |
| | BALCONY | BALCONY | 21 |
| S106, SERVICED ACCOMODATION | | | |
| | BALCONY | BALCONY | 27 |
| | STUDIO SUITE | APARTMENT - SERVICED | 35 |
| S107, SERVICED ACCOMODATION | | | |
| | BALCONY | BALCONY | 12 |
| | STUDIO SUITE | APARTMENT - SERVICED | 36 |
| S108, SERVICED ACCOMODATION | | | |
| | BALCONY | BALCONY | 12 |
| | STUDIO SUITE | APARTMENT - SERVICED | 36 |
| S109, SERVICED ACCOMODATION | | | |
| | BALCONY | BALCONY | 9 |
| | STUDIO SUITE | APARTMENT - SERVICED | 36 |
| S110, SERVICED ACCOMODATION | | | |
| | BALCONY | BALCONY | 8 |
| | STUDIO SUITE | APARTMENT - SERVICED | 37 |
| S111, SERVICED ACCOMODATION | | | |
| | BALCONY | BALCONY | 8 |
| | STUDIO SUITE | APARTMENT - SERVICED | 36 |
| S112, SERVICED ACCOMODATION | | | |
| | BALCONY | BALCONY | 8 |
| | STUDIO SUITE | APARTMENT - SERVICED | 36 |
| S113, SERVICED ACCOMODATION | | | |
| | BALCONY | BALCONY | 16 |
| | STUDIO SUITE | APARTMENT - SERVICED | 47 |
| S114, SERVICED ACCOMODATION | | | |
| | ACCESS SUITE | APARTMENT - SERVICED | 53 |
| | BALCONY | BALCONY | 10 |
| S115, SERVICED ACCOMODATION | | | |
| | BALCONY | BALCONY | 7 |
| | STUDIO SUITE | APARTMENT - SERVICED | 39 |
| S116, SERVICED ACCOMODATION | | | |
| | BALCONY | BALCONY | 7 |
| | STUDIO SUITE | APARTMENT - SERVICED | 39 |
| S117, SERVICED ACCOMODATION | | | |
| | BALCONY | BALCONY | 7 |
| | STUDIO SUITE | APARTMENT - SERVICED | 39 |
| S118, SERVICED ACCOMODATION | | | |
| | BALCONY | BALCONY | 7 |
| | STUDIO SUITE | APARTMENT - SERVICED | 39 |
| S119, SERVICED ACCOMODATION | | | |
| | BALCONY | BALCONY | 7 |
| | STUDIO SUITE | APARTMENT - SERVICED | 39 |
| S120, SERVICED ACCOMODATION | | | |
| | BALCONY | BALCONY | 7 |
| | STUDIO SUITE | APARTMENT - SERVICED | 39 |
| S121, SERVICED ACCOMODATION | | | |
| | BALCONY | BALCONY | 18 |
| | STUDIO SUITE | APARTMENT - SERVICED | 48 |


| SERVICED APARTMENT SCHEDULE - LEVEL 1 | | | |
|---------------------------------------|--------------|----------------------|----|
| APT. NUMBER | | AREA | |
| S122, SERVICED ACCOMODATION | | | |
| | BALCONY | BALCONY | 14 |
| | STUDIO SUITE | APARTMENT - SERVICED | 44 |
| S123, SERVICED ACCOMODATION | | | |
| | BALCONY | BALCONY | 24 |
| | STUDIO SUITE | APARTMENT - SERVICED | 44 |
| S124, SERVICED ACCOMODATION | | | |
| | ACCESS SUITE | APARTMENT - SERVICED | 38 |
| | BALCONY | BALCONY | 15 |



LEGEND

| | |
|---------------------|-----------------------|
| [X-B-X] | APARTMENT TYPE CODE |
| XXX | APARTMENT NUMBER |
| 2 BED (NDIS) | APARTMENT DESCRIPTION |
| A:XX m ² | APARTMENT AREA |



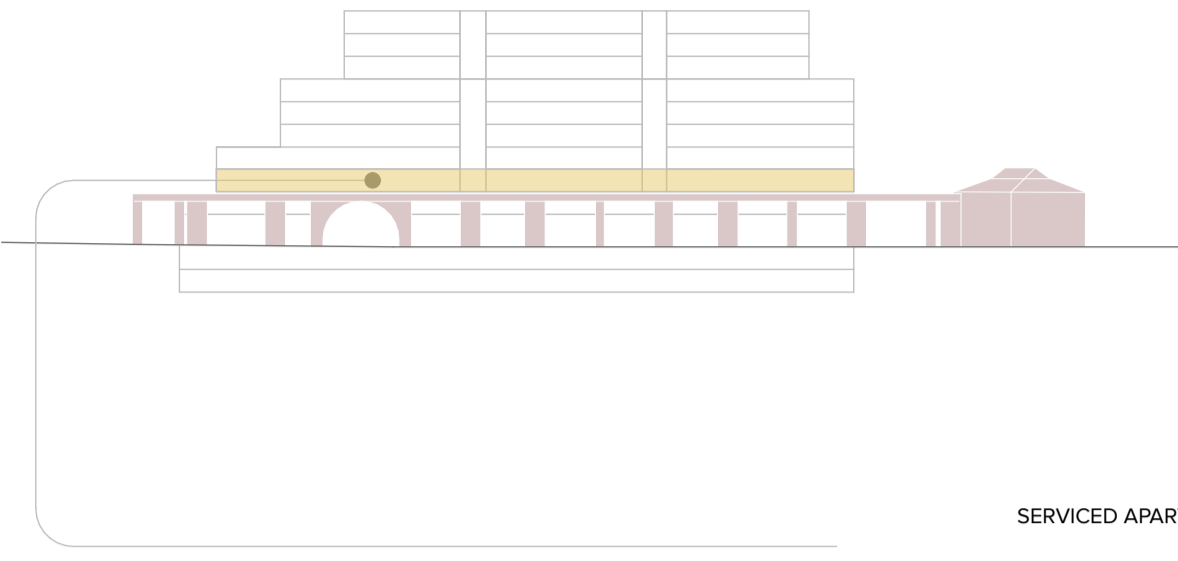

| AREA SCHEDULE - LEVEL 2 | | |
|-----------------------------|----------------------------|-----------|
| NAME | AREA | NO. |
| APARTMENT - SERVICED | | |
| 1 BED SUITE | 59 | 1 |
| STUDIO SUITE | 1,231 | 32 |
| | 1,290 m² | 33 |
| BALCONY | | |
| BALCONY | 465 | 33 |
| | 465 m² | 33 |
| CIRCULATION | | |
| CORRIDOR | 376 | 1 |
| | 376 m² | 1 |
| COMMUNAL AREAS | | |
| AMENITIES | 49 | 1 |
| CINEMA | 62 | 1 |
| GOLF SIMULATOR | 47 | 1 |
| GYM | 244 | 1 |
| PRIVATE FUNCTION | 104 | 1 |
| SAUNA | 19 | 1 |
| STEAM ROOM | 19 | 1 |
| TERRACE | 1,002 | 1 |
| WINE ROOM | 19 | 1 |
| | 1,565 m² | 9 |
| CORE | | |
| LIFTS | 25 | 1 |
| STAIR | 77 | 4 |
| | 102 m² | 5 |
| SERVICES | | |
| BIN CHUTE | 26 | 1 |
| PLANT ROOM | 55 | 1 |
| SERVICES | 36 | 1 |
| STAIR | 21 | 4 |
| STORE | 9 | 1 |
| | 147 m² | 8 |
| | 3,945 m² | 89 |


| SERVICED APARTMENT SCHEDULE - LEVEL 2 | | |
|---------------------------------------|------|-----|
| APT. NUMBER | AREA | NO. |
| 201, SERVICED ACCOMODATION | | |
| BALCONY BALCONY | 13 | |
| BALCONY BALCONY | 17 | |
| STUDIO SUITE APARTMENT - SERVICED | 42 | |
| 202, SERVICED ACCOMODATION | | |
| BALCONY BALCONY | 11 | |
| STUDIO SUITE APARTMENT - SERVICED | 38 | |
| 203, SERVICED ACCOMODATION | | |
| BALCONY BALCONY | 11 | |
| STUDIO SUITE APARTMENT - SERVICED | 38 | |
| 204, SERVICED ACCOMODATION | | |
| BALCONY BALCONY | 11 | |
| STUDIO SUITE APARTMENT - SERVICED | 38 | |
| 205, SERVICED ACCOMODATION | | |
| BALCONY BALCONY | 11 | |
| STUDIO SUITE APARTMENT - SERVICED | 38 | |
| 206, SERVICED ACCOMODATION | | |
| BALCONY BALCONY | 11 | |
| STUDIO SUITE APARTMENT - SERVICED | 38 | |
| 207, SERVICED ACCOMODATION | | |
| BALCONY BALCONY | 11 | |
| STUDIO SUITE APARTMENT - SERVICED | 38 | |
| 208, SERVICED ACCOMODATION | | |
| BALCONY BALCONY | 11 | |
| STUDIO SUITE APARTMENT - SERVICED | 38 | |
| 209, SERVICED ACCOMODATION | | |
| BALCONY BALCONY | 11 | |
| STUDIO SUITE APARTMENT - SERVICED | 38 | |
| 210, SERVICED ACCOMODATION | | |
| BALCONY BALCONY | 11 | |
| STUDIO SUITE APARTMENT - SERVICED | 38 | |
| 211, SERVICED ACCOMODATION | | |
| BALCONY BALCONY | 11 | |
| STUDIO SUITE APARTMENT - SERVICED | 38 | |
| 212, SERVICED ACCOMODATION | | |
| BALCONY BALCONY | 11 | |
| STUDIO SUITE APARTMENT - SERVICED | 38 | |
| 213, SERVICED ACCOMODATION | | |
| BALCONY BALCONY | 11 | |
| STUDIO SUITE APARTMENT - SERVICED | 38 | |
| 214, SERVICED ACCOMODATION | | |
| BALCONY BALCONY | 11 | |
| STUDIO SUITE APARTMENT - SERVICED | 38 | |
| 215, SERVICED ACCOMODATION | | |
| BALCONY BALCONY | 18 | |
| STUDIO SUITE APARTMENT - SERVICED | 35 | |
| 216, SERVICED ACCOMODATION | | |
| BALCONY BALCONY | 17 | |
| STUDIO SUITE APARTMENT - SERVICED | 42 | |
| 217, SERVICED ACCOMODATION | | |
| 1 BED SUITE APARTMENT - SERVICED | 59 | |
| BALCONY BALCONY | 63 | |
| 218, SERVICED ACCOMODATION | | |
| BALCONY BALCONY | 18 | |
| STUDIO SUITE APARTMENT - SERVICED | 43 | |
| 219, SERVICED ACCOMODATION | | |
| BALCONY BALCONY | 33 | |
| STUDIO SUITE APARTMENT - SERVICED | 38 | |
| 220, SERVICED ACCOMODATION | | |
| BALCONY BALCONY | 11 | |
| STUDIO SUITE APARTMENT - SERVICED | 38 | |
| 221, SERVICED ACCOMODATION | | |
| BALCONY BALCONY | 11 | |
| STUDIO SUITE APARTMENT - SERVICED | 38 | |
| 222, SERVICED ACCOMODATION | | |
| BALCONY BALCONY | 11 | |


| SERVICED APARTMENT SCHEDULE - LEVEL 2 | | |
|---------------------------------------|------|-----|
| APT. NUMBER | AREA | NO. |
| 223, SERVICED ACCOMODATION | | |
| BALCONY BALCONY | 11 | |
| STUDIO SUITE APARTMENT - SERVICED | 38 | |
| 224, SERVICED ACCOMODATION | | |
| BALCONY BALCONY | 11 | |
| STUDIO SUITE APARTMENT - SERVICED | 38 | |
| 225, SERVICED ACCOMODATION | | |
| BALCONY BALCONY | 11 | |
| STUDIO SUITE APARTMENT - SERVICED | 38 | |
| 226, SERVICED ACCOMODATION | | |
| BALCONY BALCONY | 11 | |
| STUDIO SUITE APARTMENT - SERVICED | 38 | |
| 227, SERVICED ACCOMODATION | | |
| BALCONY BALCONY | 11 | |
| STUDIO SUITE APARTMENT - SERVICED | 38 | |
| 228, SERVICED ACCOMODATION | | |
| BALCONY BALCONY | 11 | |
| STUDIO SUITE APARTMENT - SERVICED | 38 | |
| 229, SERVICED ACCOMODATION | | |
| BALCONY BALCONY | 11 | |
| STUDIO SUITE APARTMENT - SERVICED | 38 | |
| 230, SERVICED ACCOMODATION | | |
| BALCONY BALCONY | 11 | |
| STUDIO SUITE APARTMENT - SERVICED | 38 | |
| 231, SERVICED ACCOMODATION | | |
| BALCONY BALCONY | 11 | |
| STUDIO SUITE APARTMENT - SERVICED | 38 | |
| 232, SERVICED ACCOMODATION | | |
| BALCONY BALCONY | 11 | |
| STUDIO SUITE APARTMENT - SERVICED | 38 | |
| 233, SERVICED ACCOMODATION | | |
| STUDIO SUITE APARTMENT - SERVICED | 43 | |



LEGEND

| | |
|---------------------|-----------------------|
| [X-B-X] | APARTMENT TYPE CODE |
| XXX | APARTMENT NUMBER |
| 2 BED (NDIS) | APARTMENT DESCRIPTION |
| A:XX m ² | APARTMENT AREA |



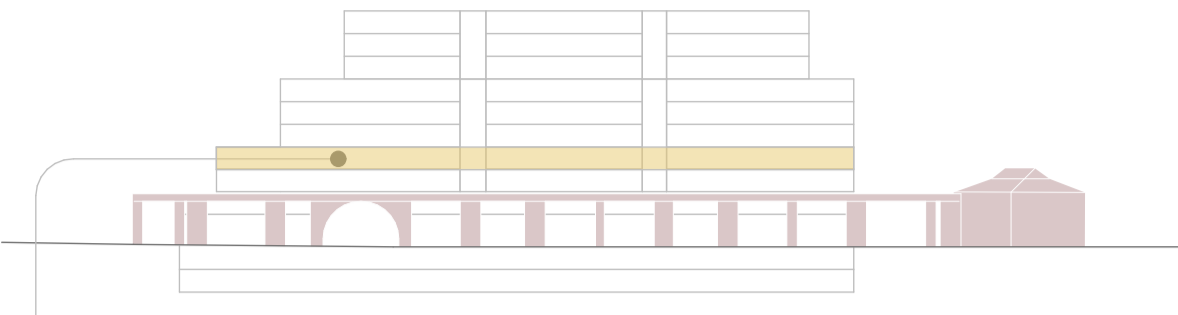

AREA SCHEDULE - LEVEL 3


| NAME | AREA | NO. |
|----------------------------|-----------|-----|
| APARTMENT | | |
| LIVING | 1,996 | 24 |
| 1,996 m² | 24 | |
| BALCONY | | |
| BALCONY | 650 | 25 |
| 650 m² | 25 | |
| CIRCULATION | | |
| CORRIDOR | 275 | 1 |
| 275 m² | 1 | |
| CORE | | |
| LIFTS | 25 | 1 |
| STAIR | 81 | 4 |
| 106 m² | 5 | |
| SERVICES | | |
| BIN CHUTE | 31 | 1 |
| SERVICES | 82 | 5 |
| 113 m² | 6 | |
| 3,140 m² | 61 | |


APARTMENT SCHEDULE - LEVEL 3

| APT. NUMBER | AREA | APT. NUMBER | AREA |
|--------------------------|------|------------------|------|
| 301, 3 BED | | | |
| BALCONY BALCONY | 19 | BALCONY BALCONY | 19 |
| LIVING APARTMENT | 119 | LIVING APARTMENT | 55 |
| 302, 2 BED (AH) | | | |
| BALCONY BALCONY | 27 | BALCONY BALCONY | 19 |
| LIVING APARTMENT | 81 | LIVING APARTMENT | 96 |
| 303, 2 BED (AH) | | | |
| BALCONY BALCONY | 27 | BALCONY BALCONY | 48 |
| LIVING APARTMENT | 82 | LIVING APARTMENT | 89 |
| 304, 3 BED | | | |
| BALCONY BALCONY | 19 | BALCONY BALCONY | 83 |
| LIVING APARTMENT | 93 | LIVING APARTMENT | 123 |
| 305, 1 BED (AH) | | | |
| BALCONY BALCONY | 16 | BALCONY BALCONY | 25 |
| LIVING APARTMENT | 52 | LIVING APARTMENT | 59 |
| 306, 1 BED (AH) | | | |
| BALCONY BALCONY | 16 | BALCONY BALCONY | |
| LIVING APARTMENT | 52 | LIVING APARTMENT | |
| 307, 1 BED (AH) | | | |
| BALCONY BALCONY | 16 | BALCONY BALCONY | |
| LIVING APARTMENT | 51 | LIVING APARTMENT | |
| 308, 3 BED | | | |
| BALCONY BALCONY | 81 | BALCONY BALCONY | |
| LIVING APARTMENT | 107 | LIVING APARTMENT | |
| 309, 2 BED (NDIS) | | | |
| BALCONY BALCONY | 15 | BALCONY BALCONY | |
| LIVING APARTMENT | 83 | LIVING APARTMENT | |
| 310, 2 BED (NDIS) | | | |
| BALCONY BALCONY | 21 | BALCONY BALCONY | |
| LIVING APARTMENT | 99 | LIVING APARTMENT | |
| 311, 2 BED (NDIS) | | | |
| BALCONY BALCONY | 26 | BALCONY BALCONY | |
| LIVING APARTMENT | 92 | LIVING APARTMENT | |
| 312, 2 BED (NDIS) | | | |
| BALCONY BALCONY | 18 | BALCONY BALCONY | |
| LIVING APARTMENT | 100 | LIVING APARTMENT | |
| 313, 2 BED (NDIS) | | | |
| BALCONY BALCONY | 14 | BALCONY BALCONY | |
| LIVING APARTMENT | 83 | LIVING APARTMENT | |
| 314, 2 BED (NDIS) | | | |
| BALCONY BALCONY | 14 | BALCONY BALCONY | |
| LIVING APARTMENT | 99 | LIVING APARTMENT | |
| 315, 2 BED (NDIS) | | | |
| BALCONY BALCONY | 14 | BALCONY BALCONY | |
| BALCONY BALCONY | 24 | BALCONY BALCONY | |
| LIVING APARTMENT | 124 | LIVING APARTMENT | |
| 316, 1 BED (AH) | | | |
| BALCONY BALCONY | 38 | BALCONY BALCONY | |
| LIVING APARTMENT | 56 | LIVING APARTMENT | |
| 317, 1 BED (AH) | | | |
| BALCONY BALCONY | 16 | BALCONY BALCONY | |
| LIVING APARTMENT | 52 | LIVING APARTMENT | |
| 318, 2.5 BED | | | |
| BALCONY BALCONY | 19 | BALCONY BALCONY | |
| LIVING APARTMENT | 94 | LIVING APARTMENT | |
| 319, 1 BED (AH) | | | |
| BALCONY BALCONY | 19 | BALCONY BALCONY | |
| LIVING APARTMENT | 55 | LIVING APARTMENT | |

APARTMENT SCHEDULE - LEVEL 3

| APT. NUMBER | AREA | APT. NUMBER | AREA |
|------------------------|------|------------------|------|
| 320, 1 BED (AH) | | | |
| BALCONY BALCONY | 19 | BALCONY BALCONY | 19 |
| LIVING APARTMENT | 55 | LIVING APARTMENT | 55 |
| 321, 3 BED | | | |
| BALCONY BALCONY | 19 | BALCONY BALCONY | 19 |
| LIVING APARTMENT | 96 | LIVING APARTMENT | 96 |
| 322, 2 BED | | | |
| BALCONY BALCONY | 48 | BALCONY BALCONY | 48 |
| LIVING APARTMENT | 89 | LIVING APARTMENT | 89 |
| 323, 3 BED | | | |
| BALCONY BALCONY | 83 | BALCONY BALCONY | 83 |
| LIVING APARTMENT | 123 | LIVING APARTMENT | 123 |
| 324, 1 BED (AH) | | | |
| BALCONY BALCONY | 25 | BALCONY BALCONY | 25 |
| LIVING APARTMENT | 59 | LIVING APARTMENT | 59 |



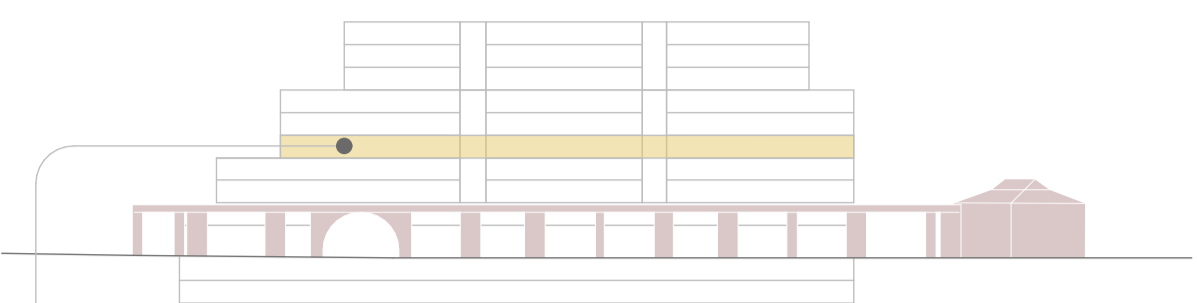

A-15 AREA SCHEDULE - LEVEL 5

| NAME | AREA | NO. |
|--------------------|----------------------------|-----------|
| APARTMENT | | |
| LIVING | 1,888 | 21 |
| BALCONY | | |
| BALCONY | 632 | 22 |
| CIRCULATION | | |
| CORRIDOR | 252 | 1 |
| CORE | | |
| LIFTS | 25 | 1 |
| STAIR | 60 | 3 |
| SERVICES | | |
| BIN CHUTE | 30 | 1 |
| SERVICES | 71 | 2 |
| STAIR | 16 | 4 |
| TOTAL | 2,974 m² | 55 |


B-2-5 APARTMENT SCHEDULE - LEVEL 5


| APT. NUMBER | AREA |
|------------------------|------|
| 501, 3 BED | |
| BALCONY | 19 |
| LIVING | 119 |
| 502, 2 BED | |
| BALCONY | 27 |
| LIVING | 82 |
| 503, 2 BED | |
| BALCONY | 27 |
| LIVING | 82 |
| 504, 3 BED | |
| BALCONY | 19 |
| LIVING | 93 |
| 505, 1 BED | |
| BALCONY | 16 |
| LIVING | 52 |
| 506, 4 BED | |
| BALCONY | 112 |
| LIVING | 180 |
| 507, 2.5 BED | |
| BALCONY | 20 |
| LIVING | 100 |
| 508, 2 BED | |
| LIVING | 93 |
| 508, 2.5 BED | |
| BALCONY | 26 |
| 509, 2.5 BED | |
| BALCONY | 19 |
| LIVING | 99 |
| 510, 2 BED | |
| BALCONY | 14 |
| 510, 2 BED (AH) | |
| LIVING | 84 |
| 511, 2 BED | |
| BALCONY | 14 |
| 511, 2 BED (AH) | |
| LIVING | 99 |
| 512, 3 BED | |
| BALCONY | 14 |
| BALCONY | 25 |
| LIVING | 124 |
| 513, 1 BED | |
| BALCONY | 38 |
| LIVING | 56 |
| 514, 1 BED | |
| BALCONY | 16 |
| LIVING | 52 |
| 515, 2.5 BED | |
| BALCONY | 19 |
| LIVING | 94 |
| 516, 1 BED | |
| BALCONY | 19 |
| LIVING | 56 |
| 517, 1 BED | |
| BALCONY | 19 |
| LIVING | 56 |
| 518, 3 BED | |
| BALCONY | 19 |
| LIVING | 96 |
| 519, 2 BED | |
| BALCONY | 45 |
| LIVING | 88 |
| 520, 3 BED | |
| BALCONY | 83 |
| LIVING | 124 |
| 521, 1 BED | |
| BALCONY | 22 |
| LIVING | 59 |



LEGEND

| | |
|----------------------|-----------------------|
| [X-B-X] | APARTMENT TYPE CODE |
| XXX | APARTMENT NUMBER |
| 2 BED (NDIS) | APARTMENT DESCRIPTION |
| A: XX m ² | APARTMENT AREA |



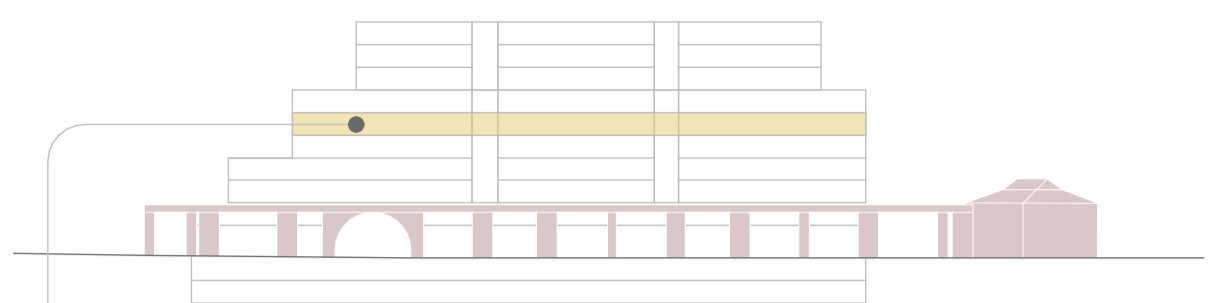

A-15 AREA SCHEDULE - LEVEL 5

| NAME | AREA | NO. |
|--------------------|----------------------------|-----------|
| APARTMENT | | |
| LIVING | 1,888 | 21 |
| BALCONY | 1,888 m² | 21 |
| BALCONY | | |
| BALCONY | 632 | 22 |
| CIRCULATION | 632 m² | 22 |
| CIRCULATION | | |
| CORRIDOR | 252 | 1 |
| CORE | 252 m² | 1 |
| CORE | | |
| LIFTS | 25 | 1 |
| STAIR | 60 | 3 |
| SERVICES | 85 m² | 4 |
| SERVICES | | |
| BIN CHUTE | 30 | 1 |
| SERVICES | 71 | 2 |
| STAIR | 16 | 4 |
| SHADING | 117 m² | 7 |
| TOTAL | 2,974 m² | 55 |


B-2-5 APARTMENT SCHEDULE - LEVEL 5


| APT. NUMBER | AREA |
|------------------------|------|
| 501, 3 BED | |
| BALCONY | 19 |
| LIVING | 119 |
| 502, 2 BED | |
| BALCONY | 27 |
| LIVING | 82 |
| 503, 2 BED | |
| BALCONY | 27 |
| LIVING | 82 |
| 504, 3 BED | |
| BALCONY | 19 |
| LIVING | 93 |
| 505, 1 BED | |
| BALCONY | 16 |
| LIVING | 52 |
| 506, 4 BED | |
| BALCONY | 112 |
| LIVING | 180 |
| 507, 2.5 BED | |
| BALCONY | 20 |
| LIVING | 100 |
| 508, 2 BED | |
| LIVING | 93 |
| 508, 2.5 BED | |
| BALCONY | 26 |
| 509, 2.5 BED | |
| BALCONY | 19 |
| LIVING | 99 |
| 510, 2 BED | |
| BALCONY | 14 |
| 510, 2 BED (AH) | |
| LIVING | 84 |
| 511, 2 BED | |
| BALCONY | 14 |
| 511, 2 BED (AH) | |
| LIVING | 99 |
| 512, 3 BED | |
| BALCONY | 14 |
| BALCONY | 25 |
| LIVING | 124 |
| 513, 1 BED | |
| BALCONY | 38 |
| LIVING | 56 |
| 514, 1 BED | |
| BALCONY | 16 |
| LIVING | 52 |
| 515, 2.5 BED | |
| BALCONY | 19 |
| LIVING | 94 |
| 516, 1 BED | |
| BALCONY | 19 |
| LIVING | 56 |
| 517, 1 BED | |
| BALCONY | 19 |
| LIVING | 56 |
| 518, 3 BED | |
| BALCONY | 19 |
| LIVING | 96 |
| 519, 2 BED | |
| BALCONY | 45 |
| LIVING | 88 |
| 520, 3 BED | |
| BALCONY | 83 |
| LIVING | 124 |
| 521, 1 BED | |
| BALCONY | 22 |
| LIVING | 59 |



LEGEND

XB.X APARTMENT TYPE CODE
 XXX APARTMENT NUMBER
 2 BED (NDIS) APARTMENT DESCRIPTION
 A:XX m² APARTMENT AREA



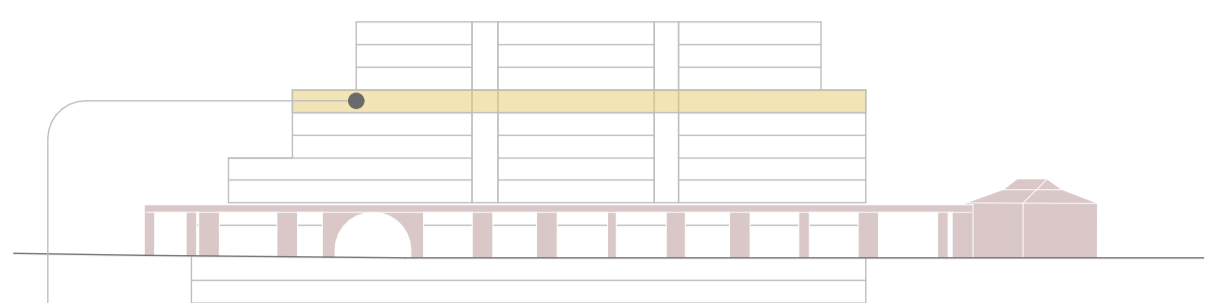


A-1-6 AREA SCHEDULE - LEVEL 6

| NAME | AREA | NO. |
|--------------------|----------------------------|-----------|
| APARTMENT | | |
| LIVING | 1,883 | 21 |
| | 1,883 m² | 21 |
| BALCONY | | |
| BALCONY | 634 | 22 |
| | 634 m² | 22 |
| CIRCULATION | | |
| CORRIDOR | 251 | 1 |
| | 251 m² | 1 |
| CORE | | |
| LIFTS | 25 | 1 |
| SERVICES | 33 | 1 |
| STAIR | 60 | 3 |
| | 118 m² | 5 |
| SERVICES | | |
| BIN CHUTE | 31 | 1 |
| SERVICES | 47 | 3 |
| | 78 m² | 4 |
| | 2,964 m² | 53 |


B-2-6 APARTMENT SCHEDULE - LEVEL 6


| APT. NUMBER | AREA |
|---------------------|------|
| 601, 3 BED | |
| BALCONY BALCONY | 19 |
| LIVING APARTMENT | 118 |
| 602, 2 BED | |
| BALCONY BALCONY | 27 |
| LIVING APARTMENT | 82 |
| 603, 2 BED | |
| BALCONY BALCONY | 27 |
| LIVING APARTMENT | 82 |
| 604, 3 BED | |
| BALCONY BALCONY | 19 |
| LIVING APARTMENT | 94 |
| 605, 1 BED | |
| BALCONY BALCONY | 16 |
| LIVING APARTMENT | 52 |
| 606, 4 BED | |
| BALCONY BALCONY | 112 |
| LIVING APARTMENT | 179 |
| 607, 2 BED | |
| LIVING APARTMENT | 93 |
| 607, 2.5 BED | |
| BALCONY BALCONY | 20 |
| BALCONY BALCONY | 26 |
| LIVING APARTMENT | 100 |
| 608, 2.5 BED | |
| BALCONY BALCONY | 19 |
| LIVING APARTMENT | 99 |
| 609, 2 BED | |
| BALCONY BALCONY | 14 |
| LIVING APARTMENT | 81 |
| 610, 2 BED | |
| BALCONY BALCONY | 14 |
| LIVING APARTMENT | 99 |
| 611, 3 BED | |
| BALCONY BALCONY | 14 |
| BALCONY BALCONY | 24 |
| LIVING APARTMENT | 123 |
| 614, 2.5 BED | |
| BALCONY BALCONY | 19 |
| LIVING APARTMENT | 94 |
| 616, 1 BED | |
| BALCONY BALCONY | 16 |
| BALCONY BALCONY | 19 |
| BALCONY BALCONY | 38 |
| LIVING APARTMENT | 52 |
| LIVING APARTMENT | 56 |
| LIVING APARTMENT | 56 |
| 617, 1 BED | |
| BALCONY BALCONY | 19 |
| LIVING APARTMENT | 56 |
| 618, 3 BED | |
| BALCONY BALCONY | 19 |
| LIVING APARTMENT | 96 |
| 619, 2 BED | |
| BALCONY BALCONY | 48 |
| LIVING APARTMENT | 88 |
| 620, 3 BED | |
| BALCONY BALCONY | 83 |
| LIVING APARTMENT | 124 |
| 621, 1 BED | |
| BALCONY BALCONY | 22 |
| LIVING APARTMENT | 59 |

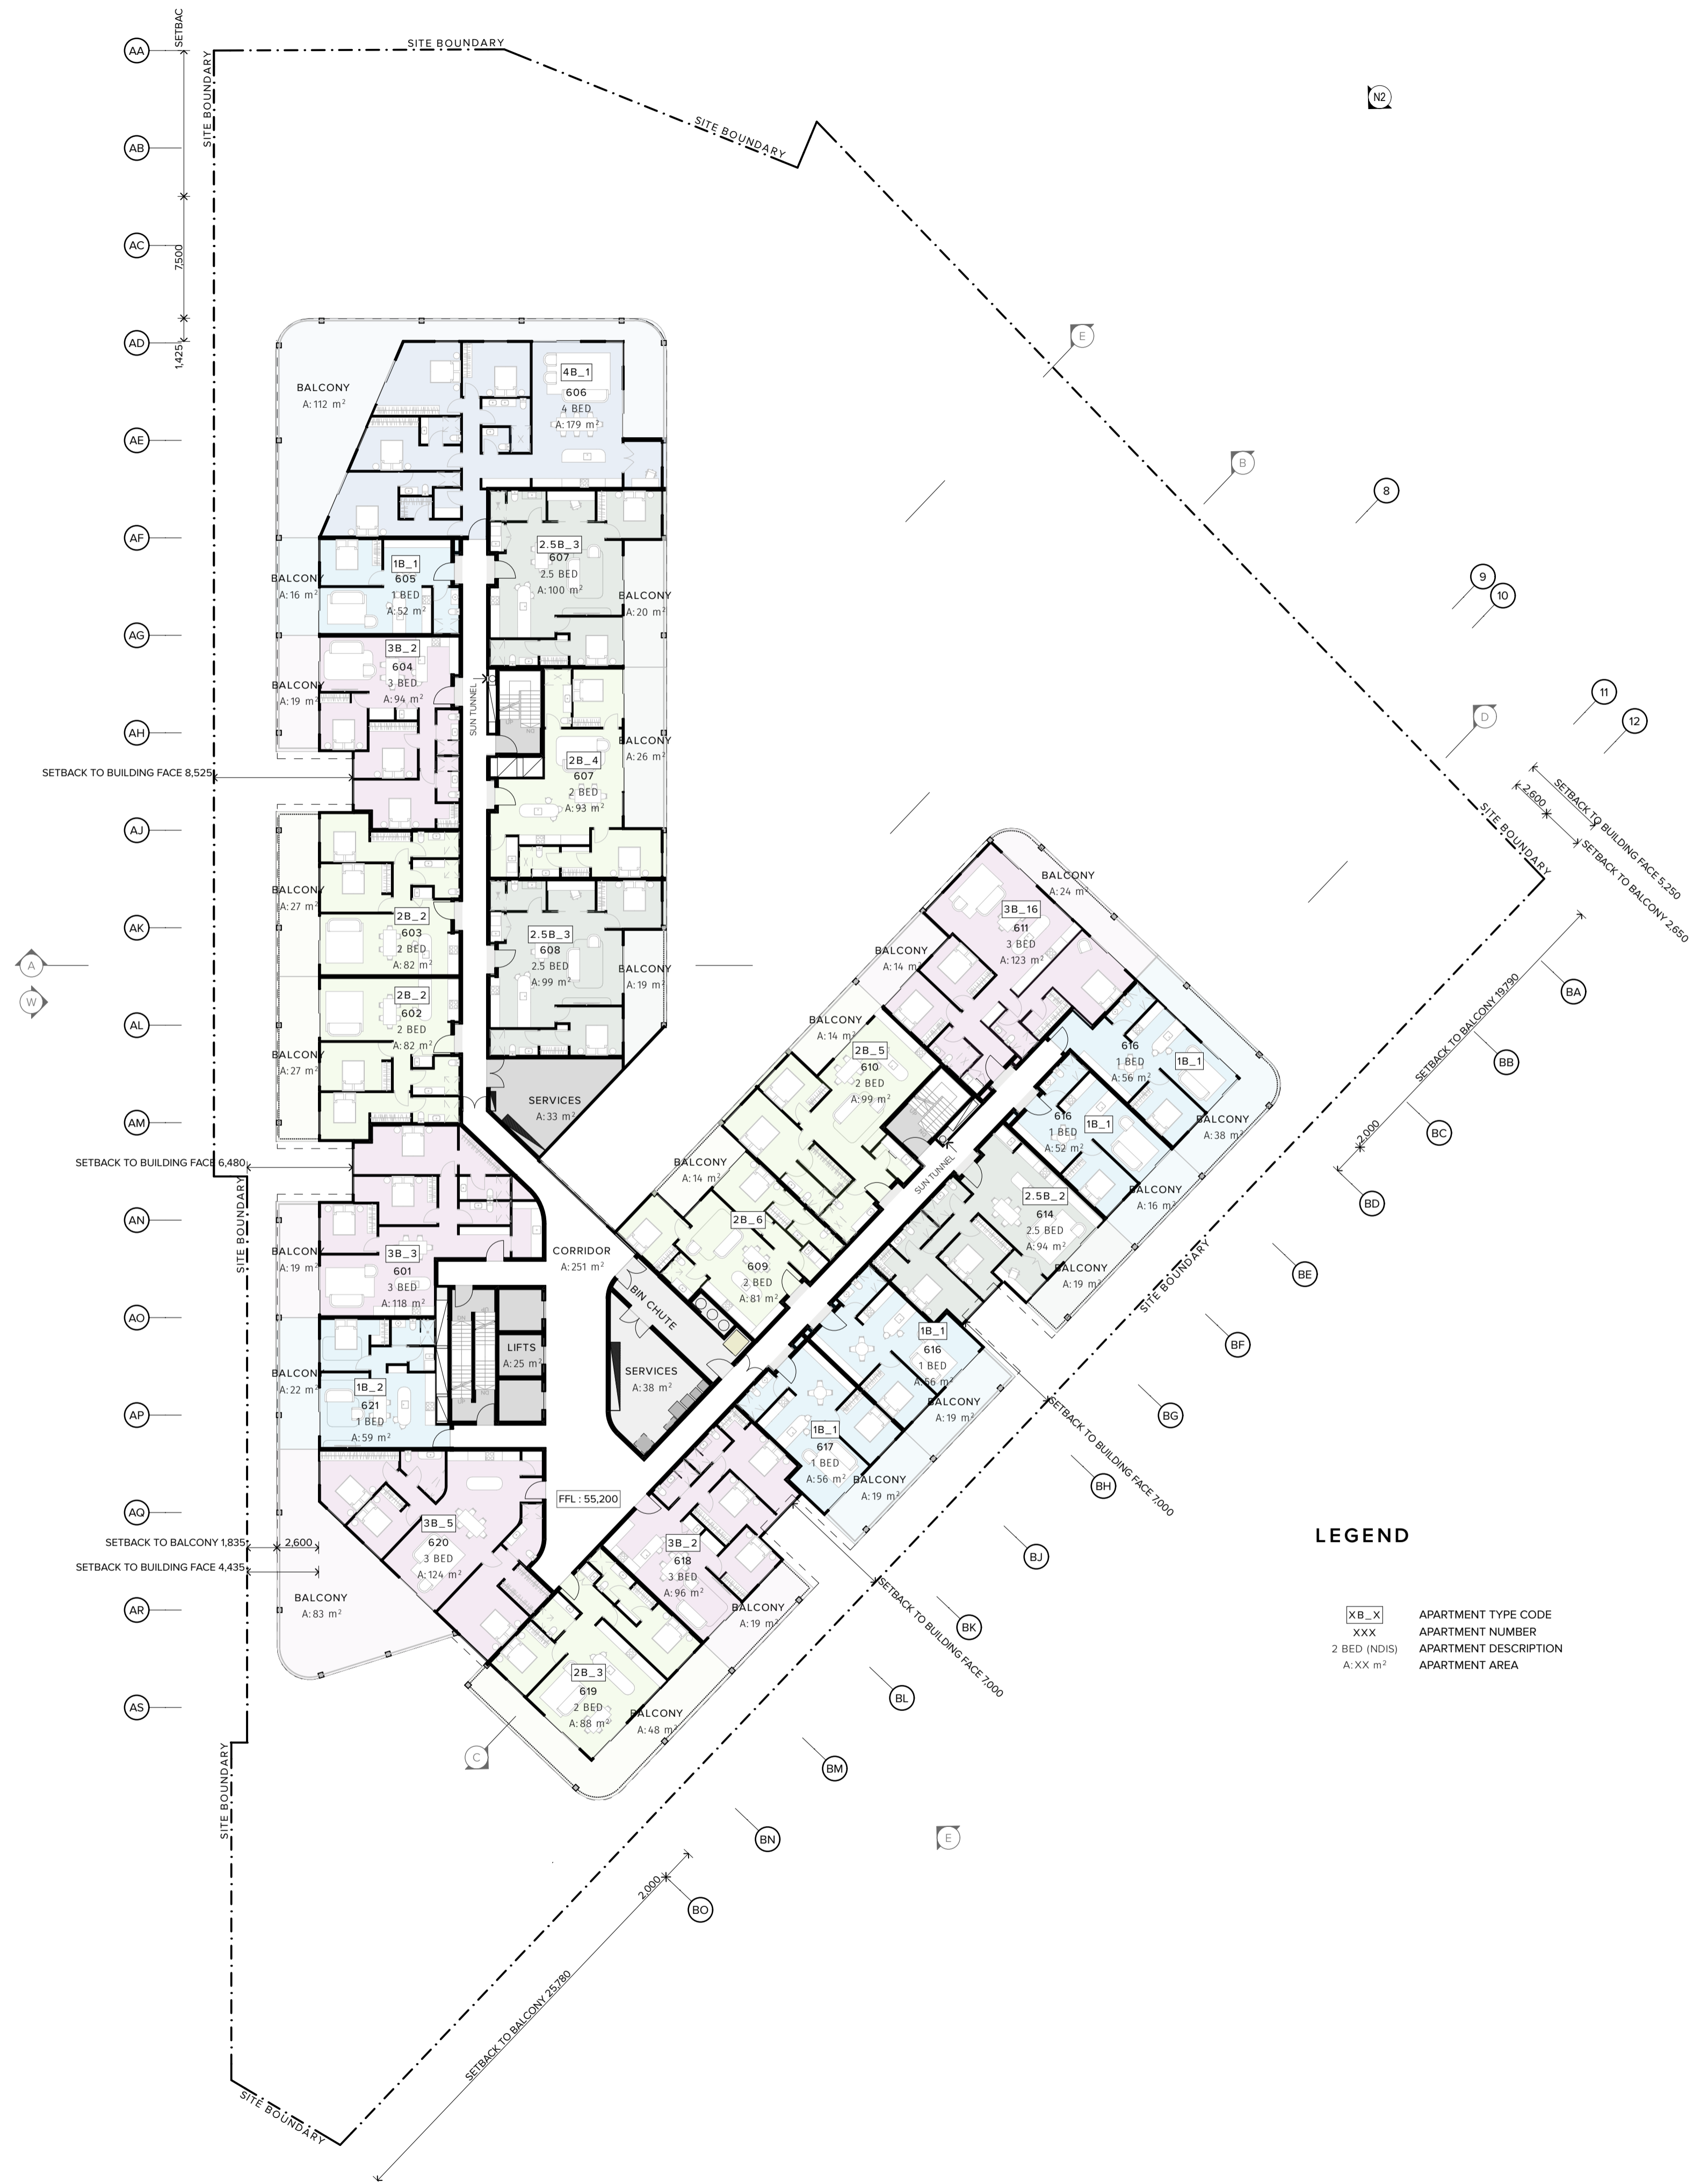

LEGEND

[XB_X] APARTMENT TYPE CODE
 XXX APARTMENT NUMBER
 2 BED (NDIS) APARTMENT DESCRIPTION
 A:XX m² APARTMENT AREA



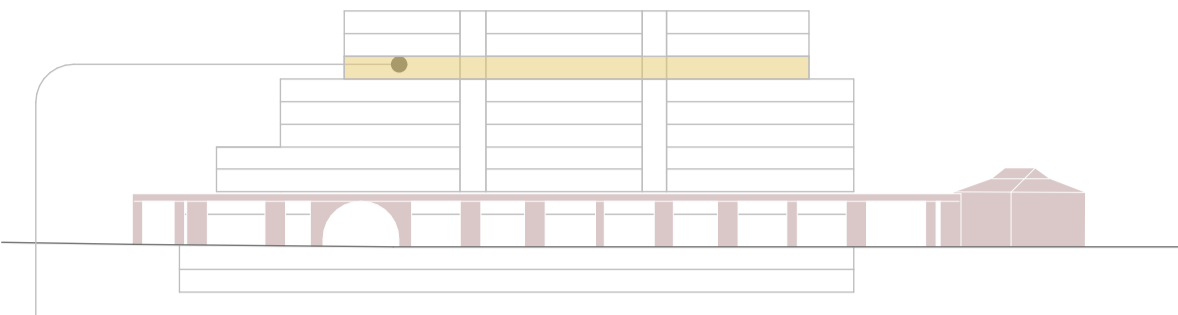


AREA SCHEDULE - LEVEL 7

| NAME | AREA | NO. |
|--------------------|----------------------------|-----------|
| APARTMENT | | |
| LIVING | 1,365 | 11 |
| BALCONY | 1,365 m² | 11 |
| BALCONY | | |
| BALCONY | 1,100 | 12 |
| CIRCULATION | 1,100 m² | 12 |
| CIRCULATION | | |
| CORRIDOR | 201 | 1 |
| CORE | 201 m² | 1 |
| CORE | | |
| LIFTS | 25 | 1 |
| STAIR | 59 | 3 |
| SERVICES | 84 m² | 4 |
| SERVICES | | |
| BIN CHUTE | 31 | 1 |
| SERVICES | 83 | 5 |
| SERVICES | 114 m² | 6 |
| SERVICES | 2,864 m² | 34 |


APARTMENT SCHEDULE - LEVEL 7


| APT. NUMBER | AREA |
|-------------------|------|
| 701, 4 BED | |
| BALCONY BALCONY | 21 |
| BALCONY BALCONY | 113 |
| LIVING APARTMENT | 221 |
| 702, 3 BED | |
| BALCONY BALCONY | 57 |
| LIVING APARTMENT | 118 |
| 703, 3 BED | |
| BALCONY BALCONY | 181 |
| LIVING APARTMENT | 137 |
| 704, 3 BED | |
| BALCONY BALCONY | 153 |
| LIVING APARTMENT | 143 |
| 705, 1 BED | |
| BALCONY BALCONY | 20 |
| LIVING APARTMENT | 61 |
| 706, 1 BED | |
| BALCONY BALCONY | 18 |
| LIVING APARTMENT | 61 |
| 707, 1 BED | |
| BALCONY BALCONY | 27 |
| LIVING APARTMENT | 61 |
| 708, 1 BED | |
| BALCONY BALCONY | 25 |
| LIVING APARTMENT | 58 |
| 709, 4 BED | |
| BALCONY BALCONY | 247 |
| LIVING APARTMENT | 199 |
| 710, 3 BED | |
| BALCONY BALCONY | 60 |
| LIVING APARTMENT | 123 |
| 711, 3 BED | |
| BALCONY BALCONY | 178 |
| LIVING APARTMENT | 183 |

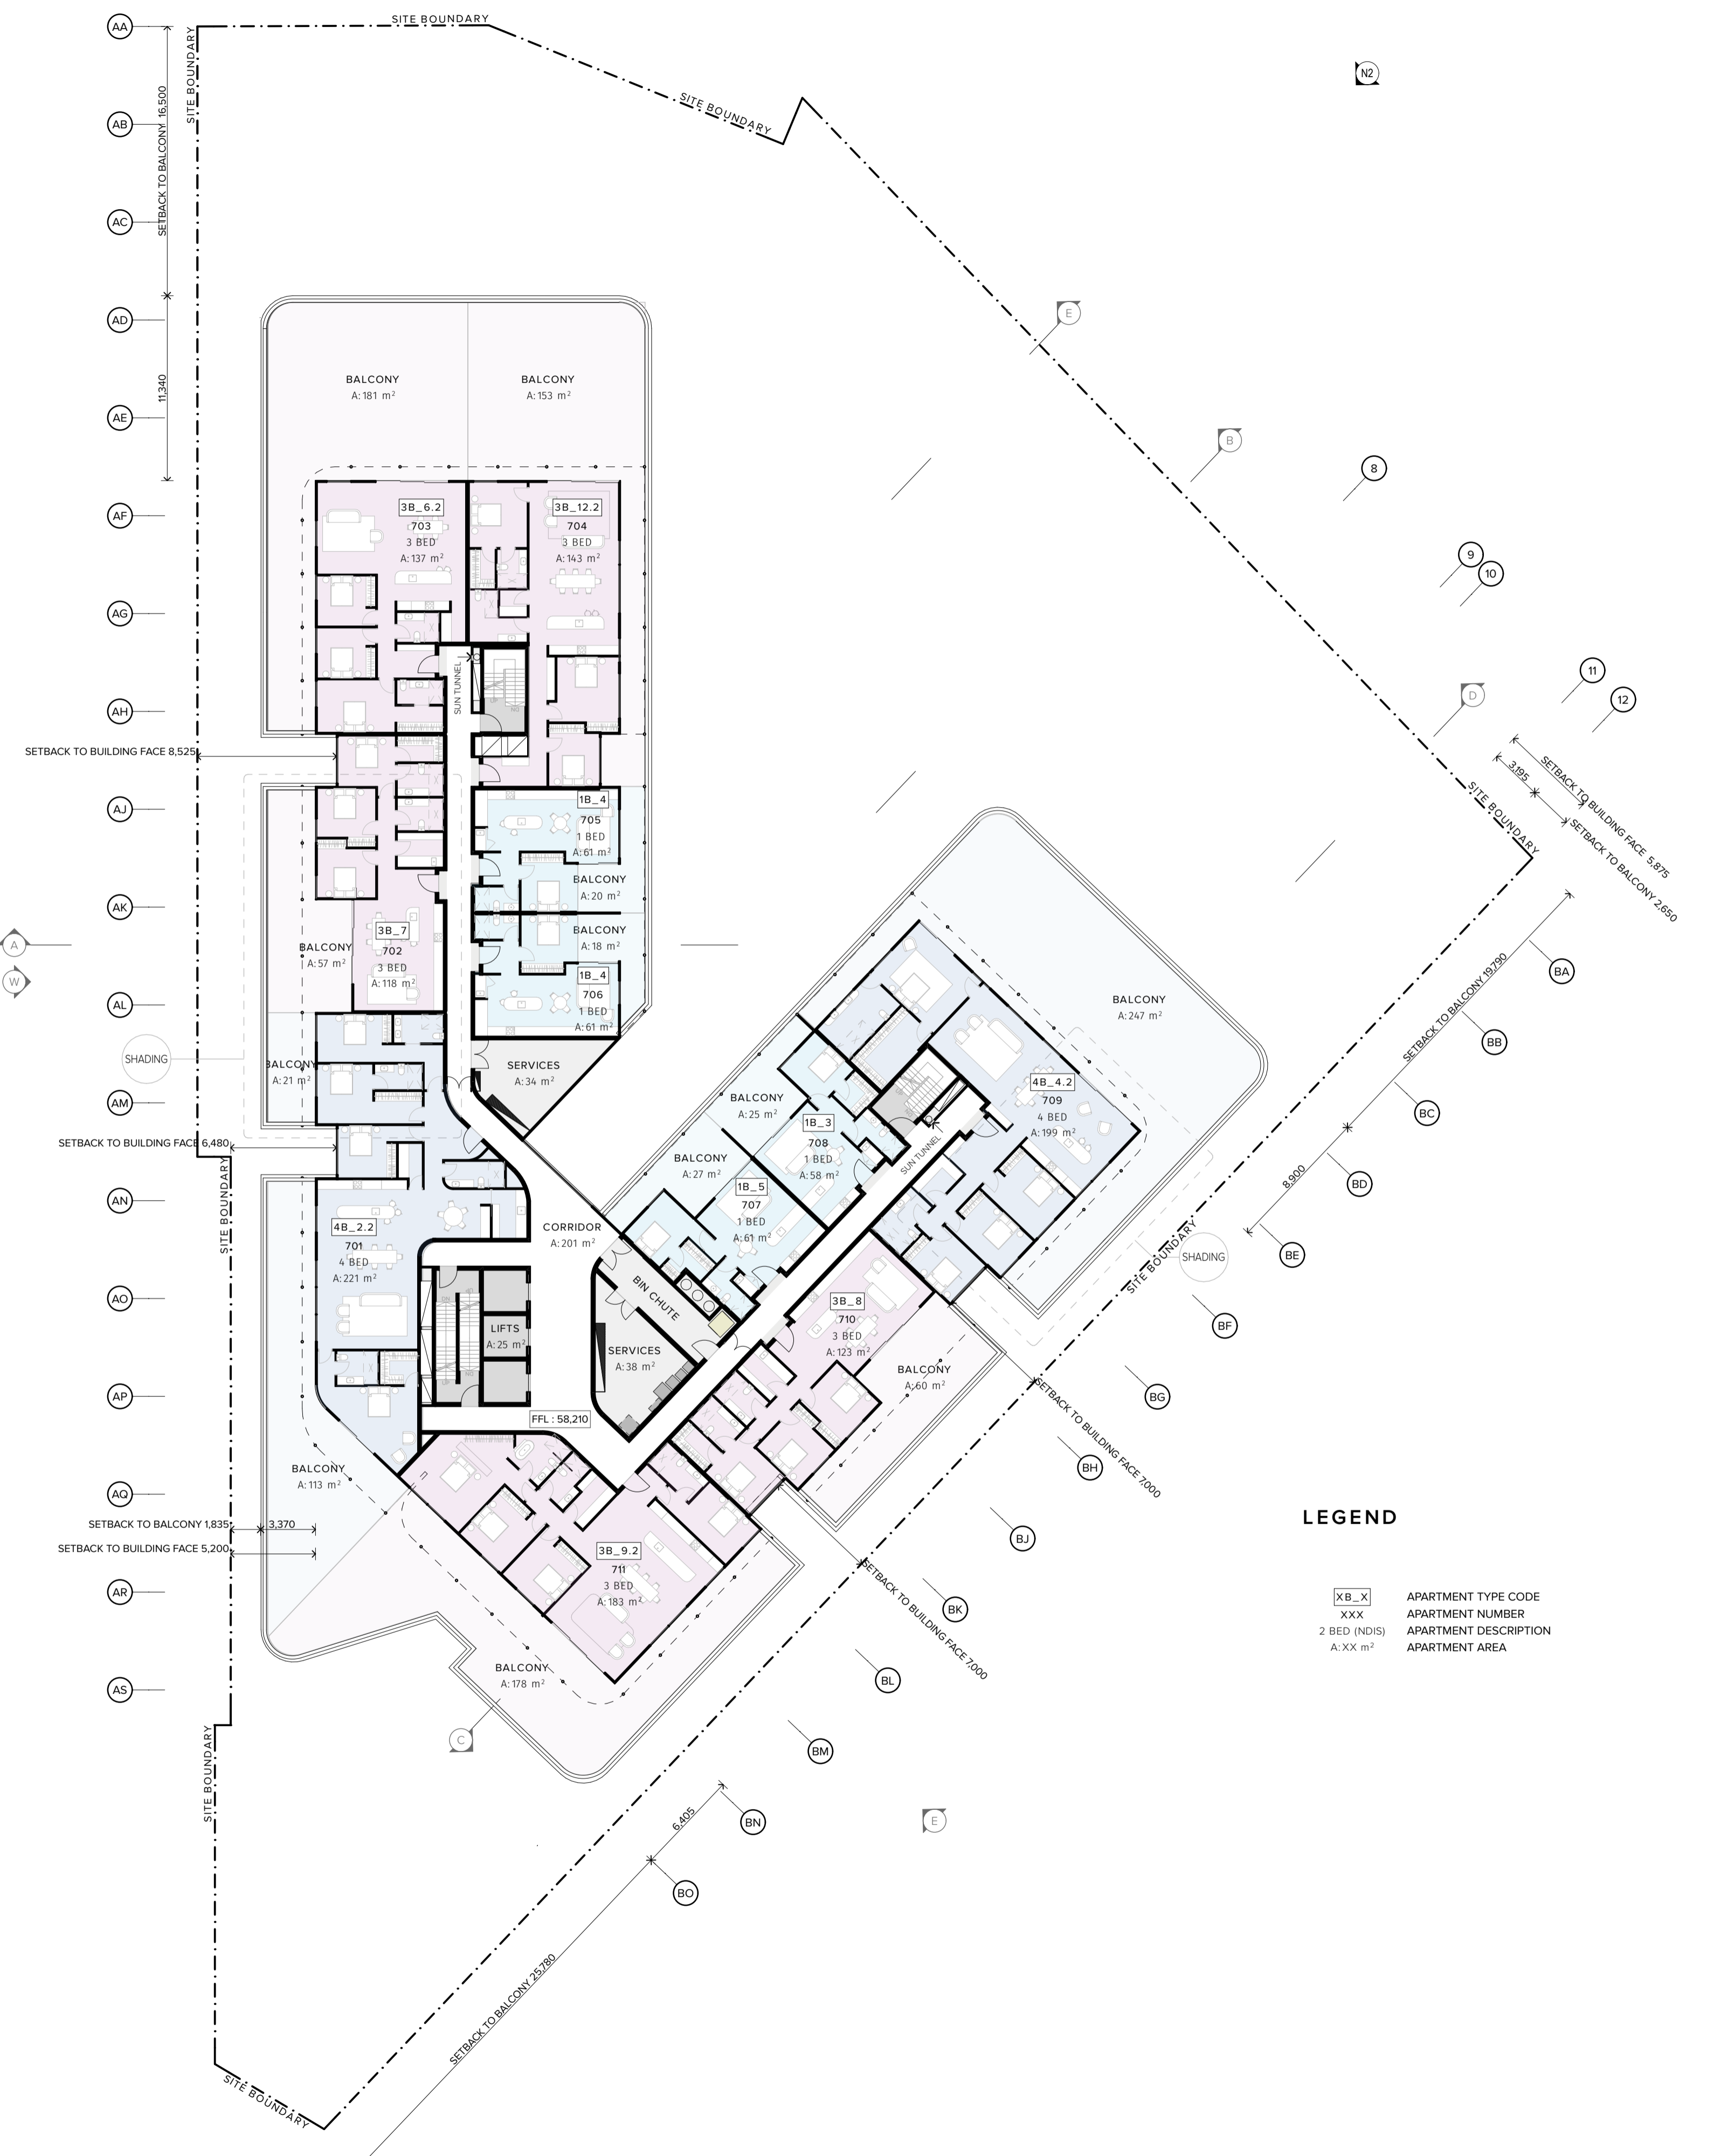

LEGEND

XB.X APARTMENT TYPE CODE
 XXX APARTMENT NUMBER
 2 BED (NDIS) APARTMENT DESCRIPTION
 A:XX m² APARTMENT AREA



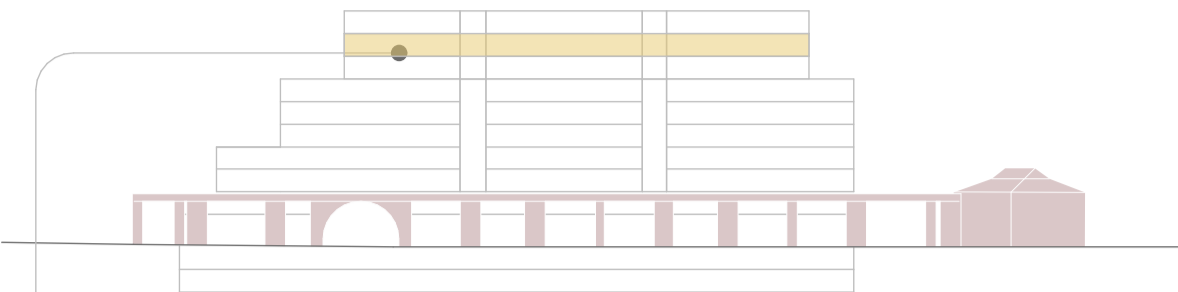


A-1-8 AREA SCHEDULE - LEVEL 8

| NAME | AREA | NO. |
|--------------------|----------------------------|-----------|
| APARTMENT | | |
| LIVING | 1,235 | 11 |
| | 1,235 m² | 11 |
| BALCONY | | |
| BALCONY | 400 | 11 |
| | 400 m² | 11 |
| CIRCULATION | | |
| CORRIDOR | 190 | 1 |
| | 190 m² | 1 |
| CORE | | |
| LIFTS | 25 | 1 |
| STAIR | 59 | 3 |
| | 84 m² | 4 |
| SERVICES | | |
| BIN CHUTE | 31 | 1 |
| SERVICES | 72 | 2 |
| STAIR | 11 | 3 |
| | 114 m² | 6 |
| | 2,023 m² | 33 |


B-2-8 APARTMENT SCHEDULE - LEVEL 8


| APT. NUMBER | AREA |
|-------------------|------|
| 801, 4 BED | |
| BALCONY BALCONY | 38 |
| LIVING APARTMENT | 208 |
| 802, 3 BED | |
| BALCONY BALCONY | 25 |
| LIVING APARTMENT | 117 |
| 803, 3 BED | |
| BALCONY BALCONY | 35 |
| LIVING APARTMENT | 115 |
| 804, 3 BED | |
| BALCONY BALCONY | 44 |
| LIVING APARTMENT | 122 |
| 805, 1 BED | |
| BALCONY BALCONY | 18 |
| LIVING APARTMENT | 61 |
| 806, 1 BED | |
| BALCONY BALCONY | 17 |
| LIVING APARTMENT | 61 |
| 807, 1 BED | |
| BALCONY BALCONY | 24 |
| BALCONY BALCONY | 25 |
| LIVING APARTMENT | 62 |
| 808, 1 BED | |
| LIVING APARTMENT | 58 |
| 809, 3 BED | |
| BALCONY BALCONY | 77 |
| LIVING APARTMENT | 153 |
| 810, 3 BED | |
| BALCONY BALCONY | 29 |
| LIVING APARTMENT | 123 |
| 811, 3 BED | |
| BALCONY BALCONY | 68 |
| LIVING APARTMENT | 155 |

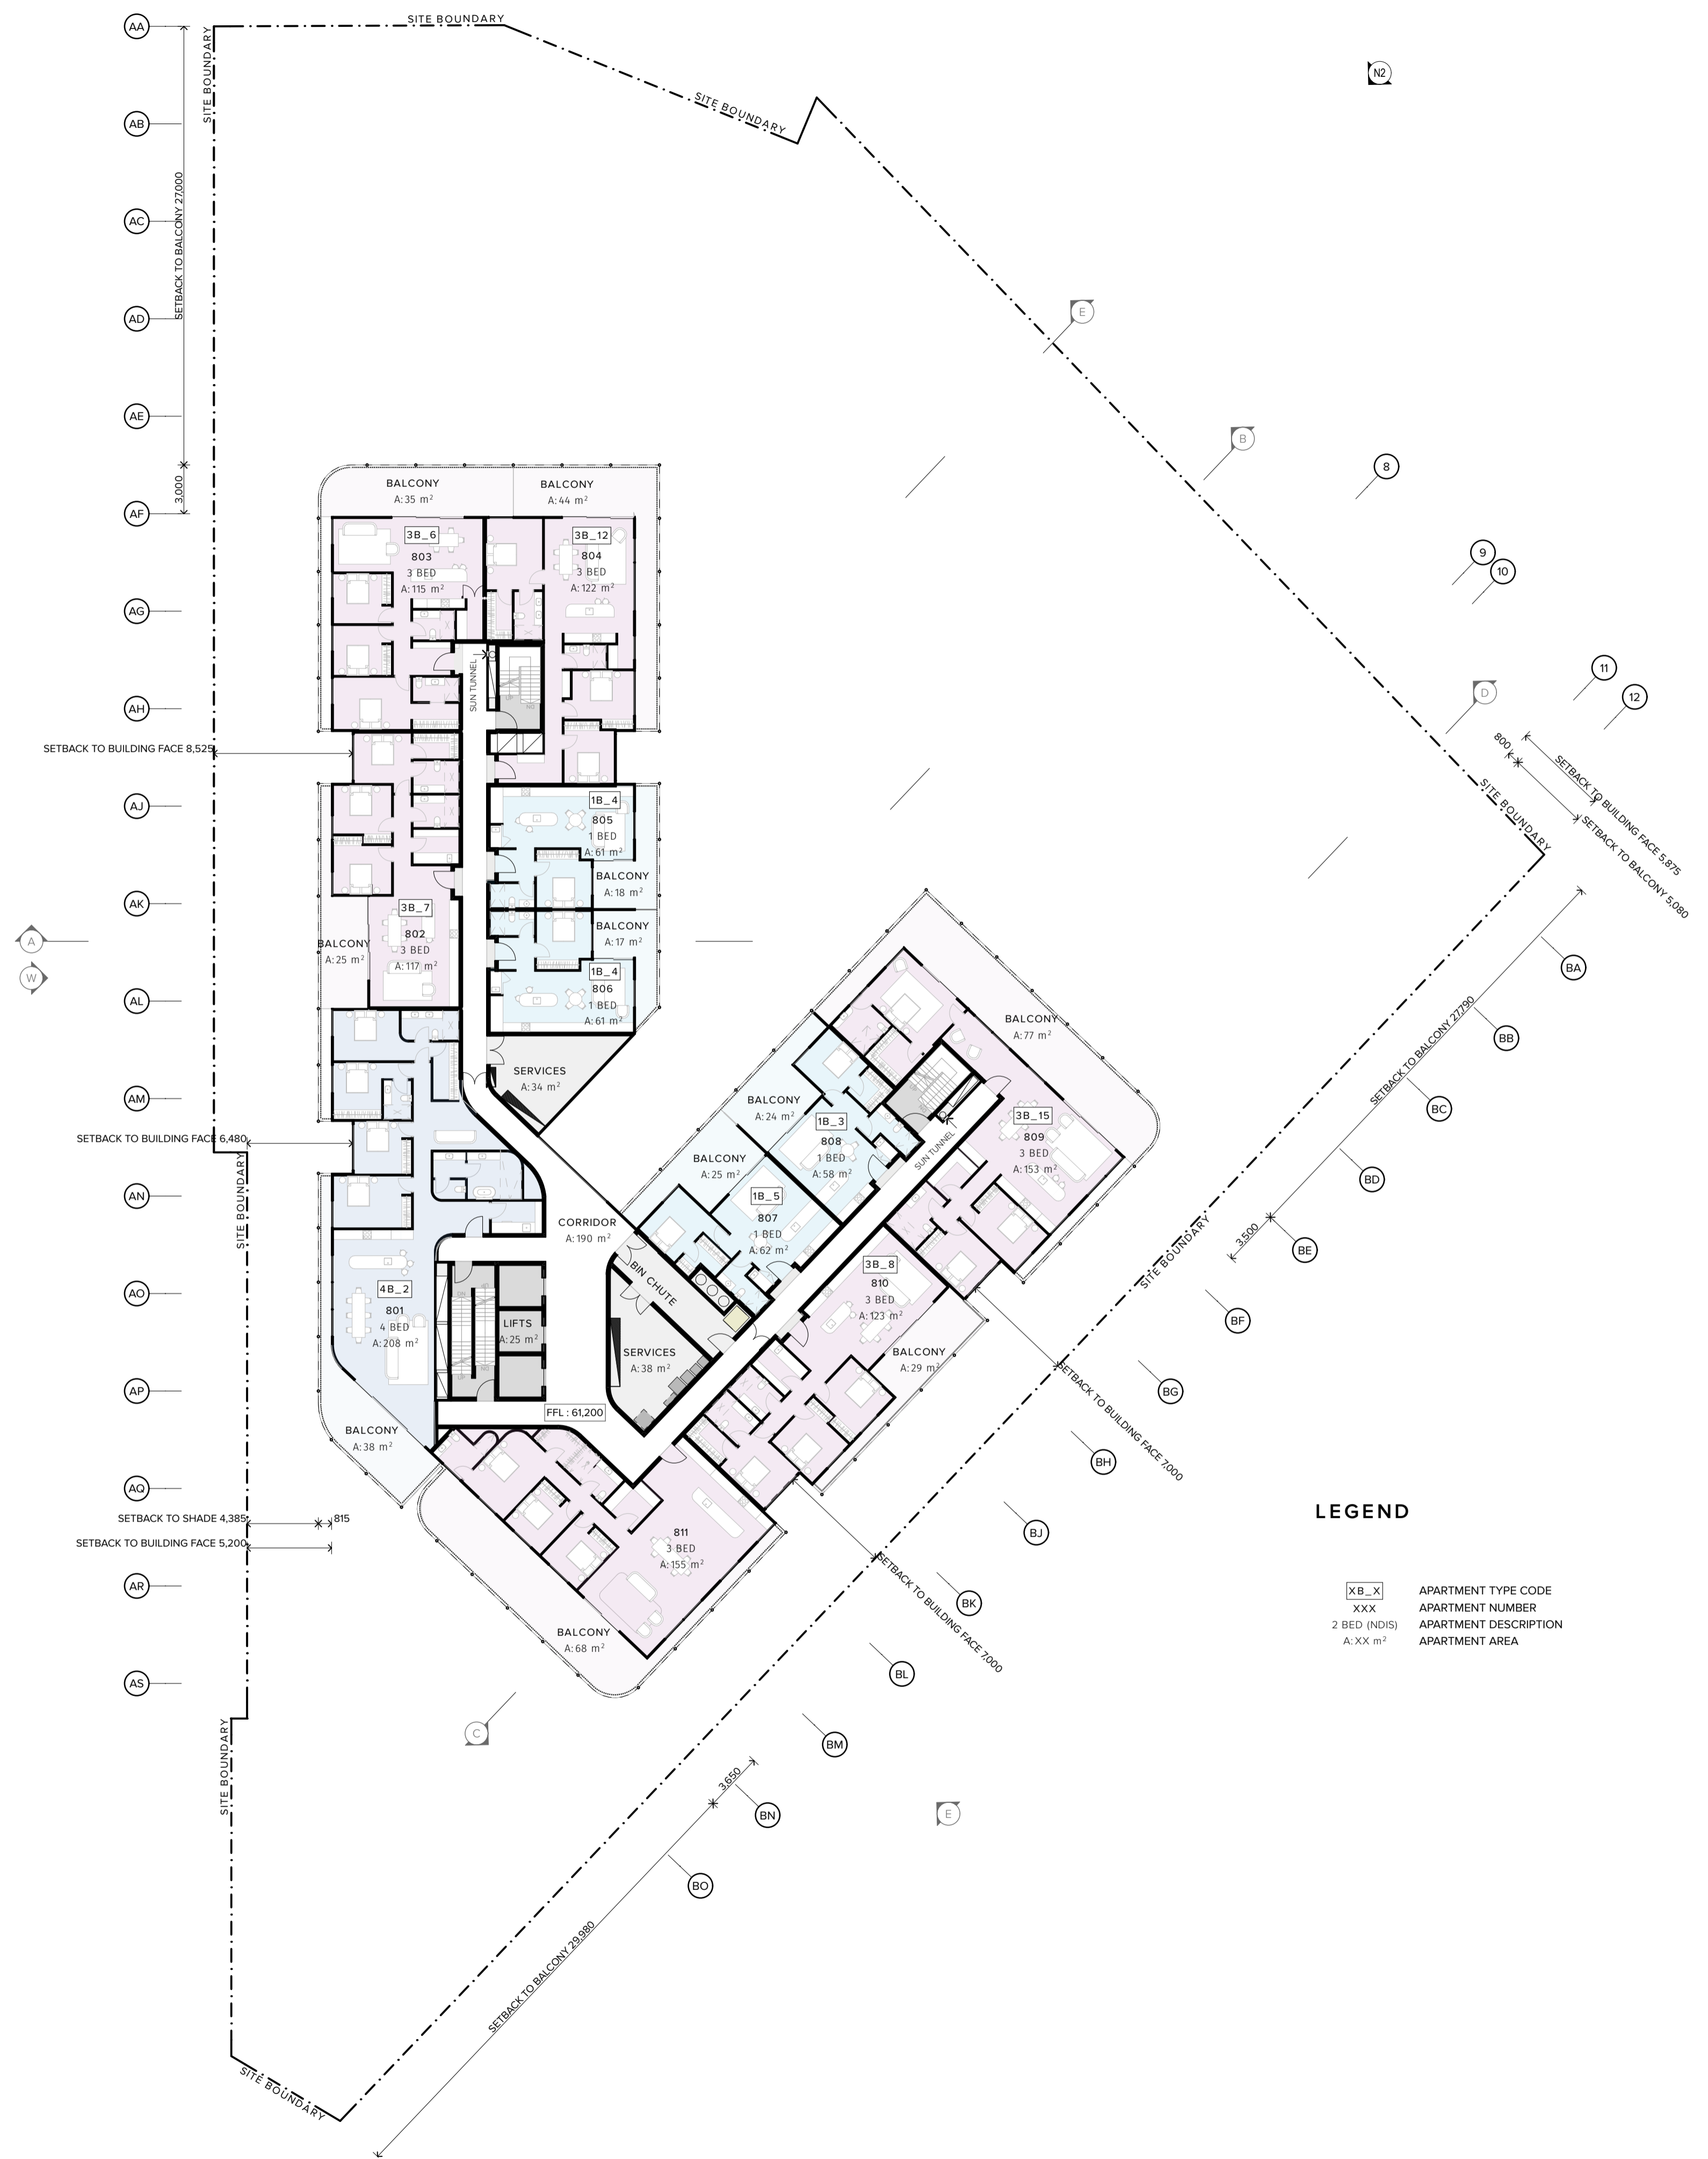

LEGEND

XB_X APARTMENT TYPE CODE
 XXX APARTMENT NUMBER
 2 BED (NDIS) APARTMENT DESCRIPTION
 A:XX m² APARTMENT AREA



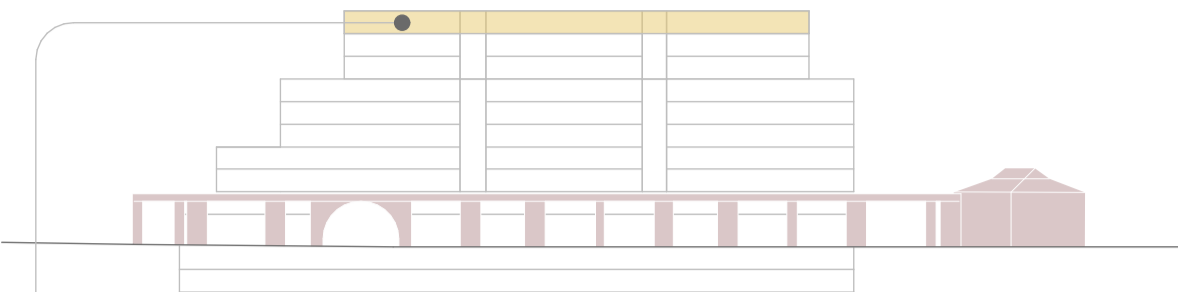


AREA SCHEDULE - LEVEL 9

| NAME | AREA | NO. |
|--------------------|----------------------------|-----------|
| APARTMENT | | |
| LIVING | 1,253 | 7 |
| | 1,253 m² | 7 |
| BALCONY | | |
| BALCONY | 378 | 8 |
| | 378 m² | 8 |
| CIRCULATION | | |
| CORRIDOR | 191 | 1 |
| | 191 m² | 1 |
| CORE | | |
| LIFTS | 25 | 1 |
| STAIR | 61 | 3 |
| | 86 m² | 4 |
| SERVICES | | |
| BIN CHUTE | 31 | 1 |
| SERVICES | 71 | 2 |
| STAIR | 9 | 2 |
| | 111 m² | 5 |
| | 2,019 m² | 25 |


APARTMENT SCHEDULE - LEVEL 9



| APT. NUMBER | AREA |
|-------------------|------|
| 901, 4 BED | |
| BALCONY BALCONY | 37 |
| LIVING APARTMENT | 207 |
| 902, 3 BED | |
| BALCONY BALCONY | 25 |
| LIVING APARTMENT | 117 |
| 903, 4 BED | |
| BALCONY BALCONY | 88 |
| LIVING APARTMENT | 219 |
| 904, 3 BED | |
| BALCONY BALCONY | 30 |
| LIVING APARTMENT | 149 |
| 905, 3 BED | |
| BALCONY BALCONY | 40 |
| LIVING APARTMENT | 131 |
| 906, 3 BED | |
| BALCONY BALCONY | 76 |
| LIVING APARTMENT | 153 |
| 907, 4 BED | |
| BALCONY BALCONY | 22 |
| BALCONY BALCONY | 60 |
| LIVING APARTMENT | 277 |

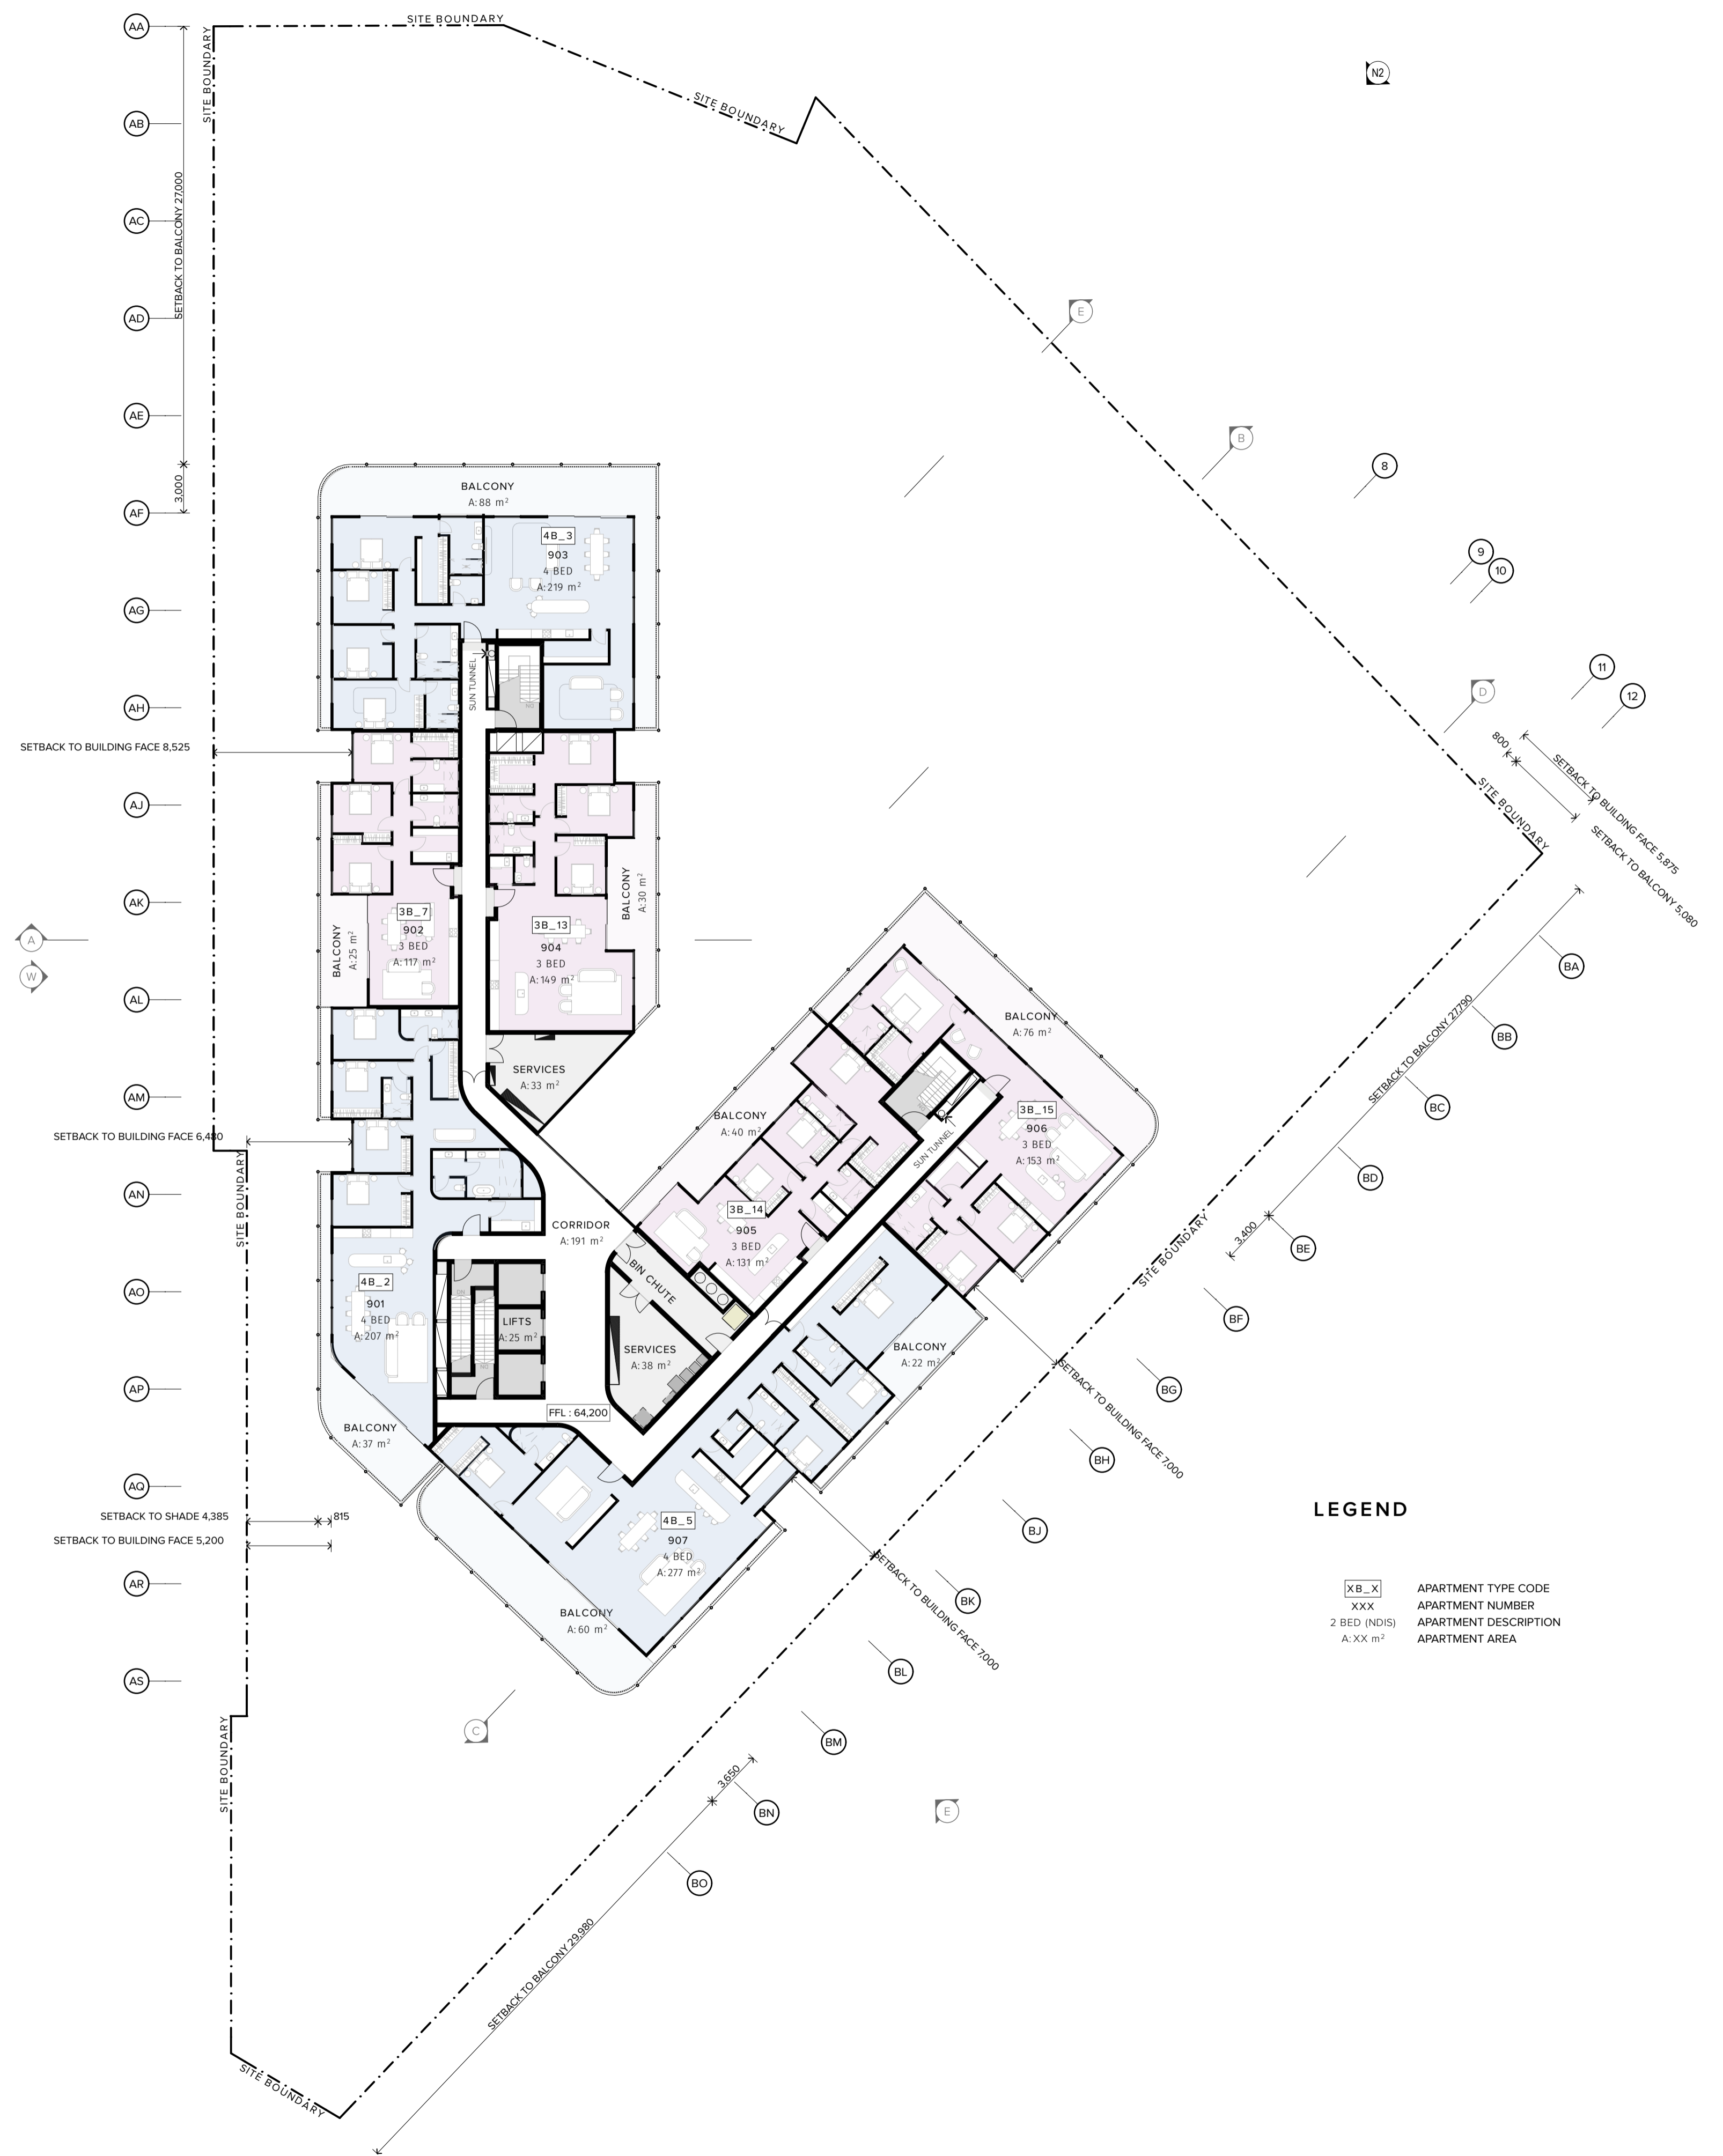


LEGEND


| | |
|---------------------|-----------------------|
| XB_X | APARTMENT TYPE CODE |
| XXX | APARTMENT NUMBER |
| 2 BED (NDIS) | APARTMENT DESCRIPTION |
| A:XX m ² | APARTMENT AREA |



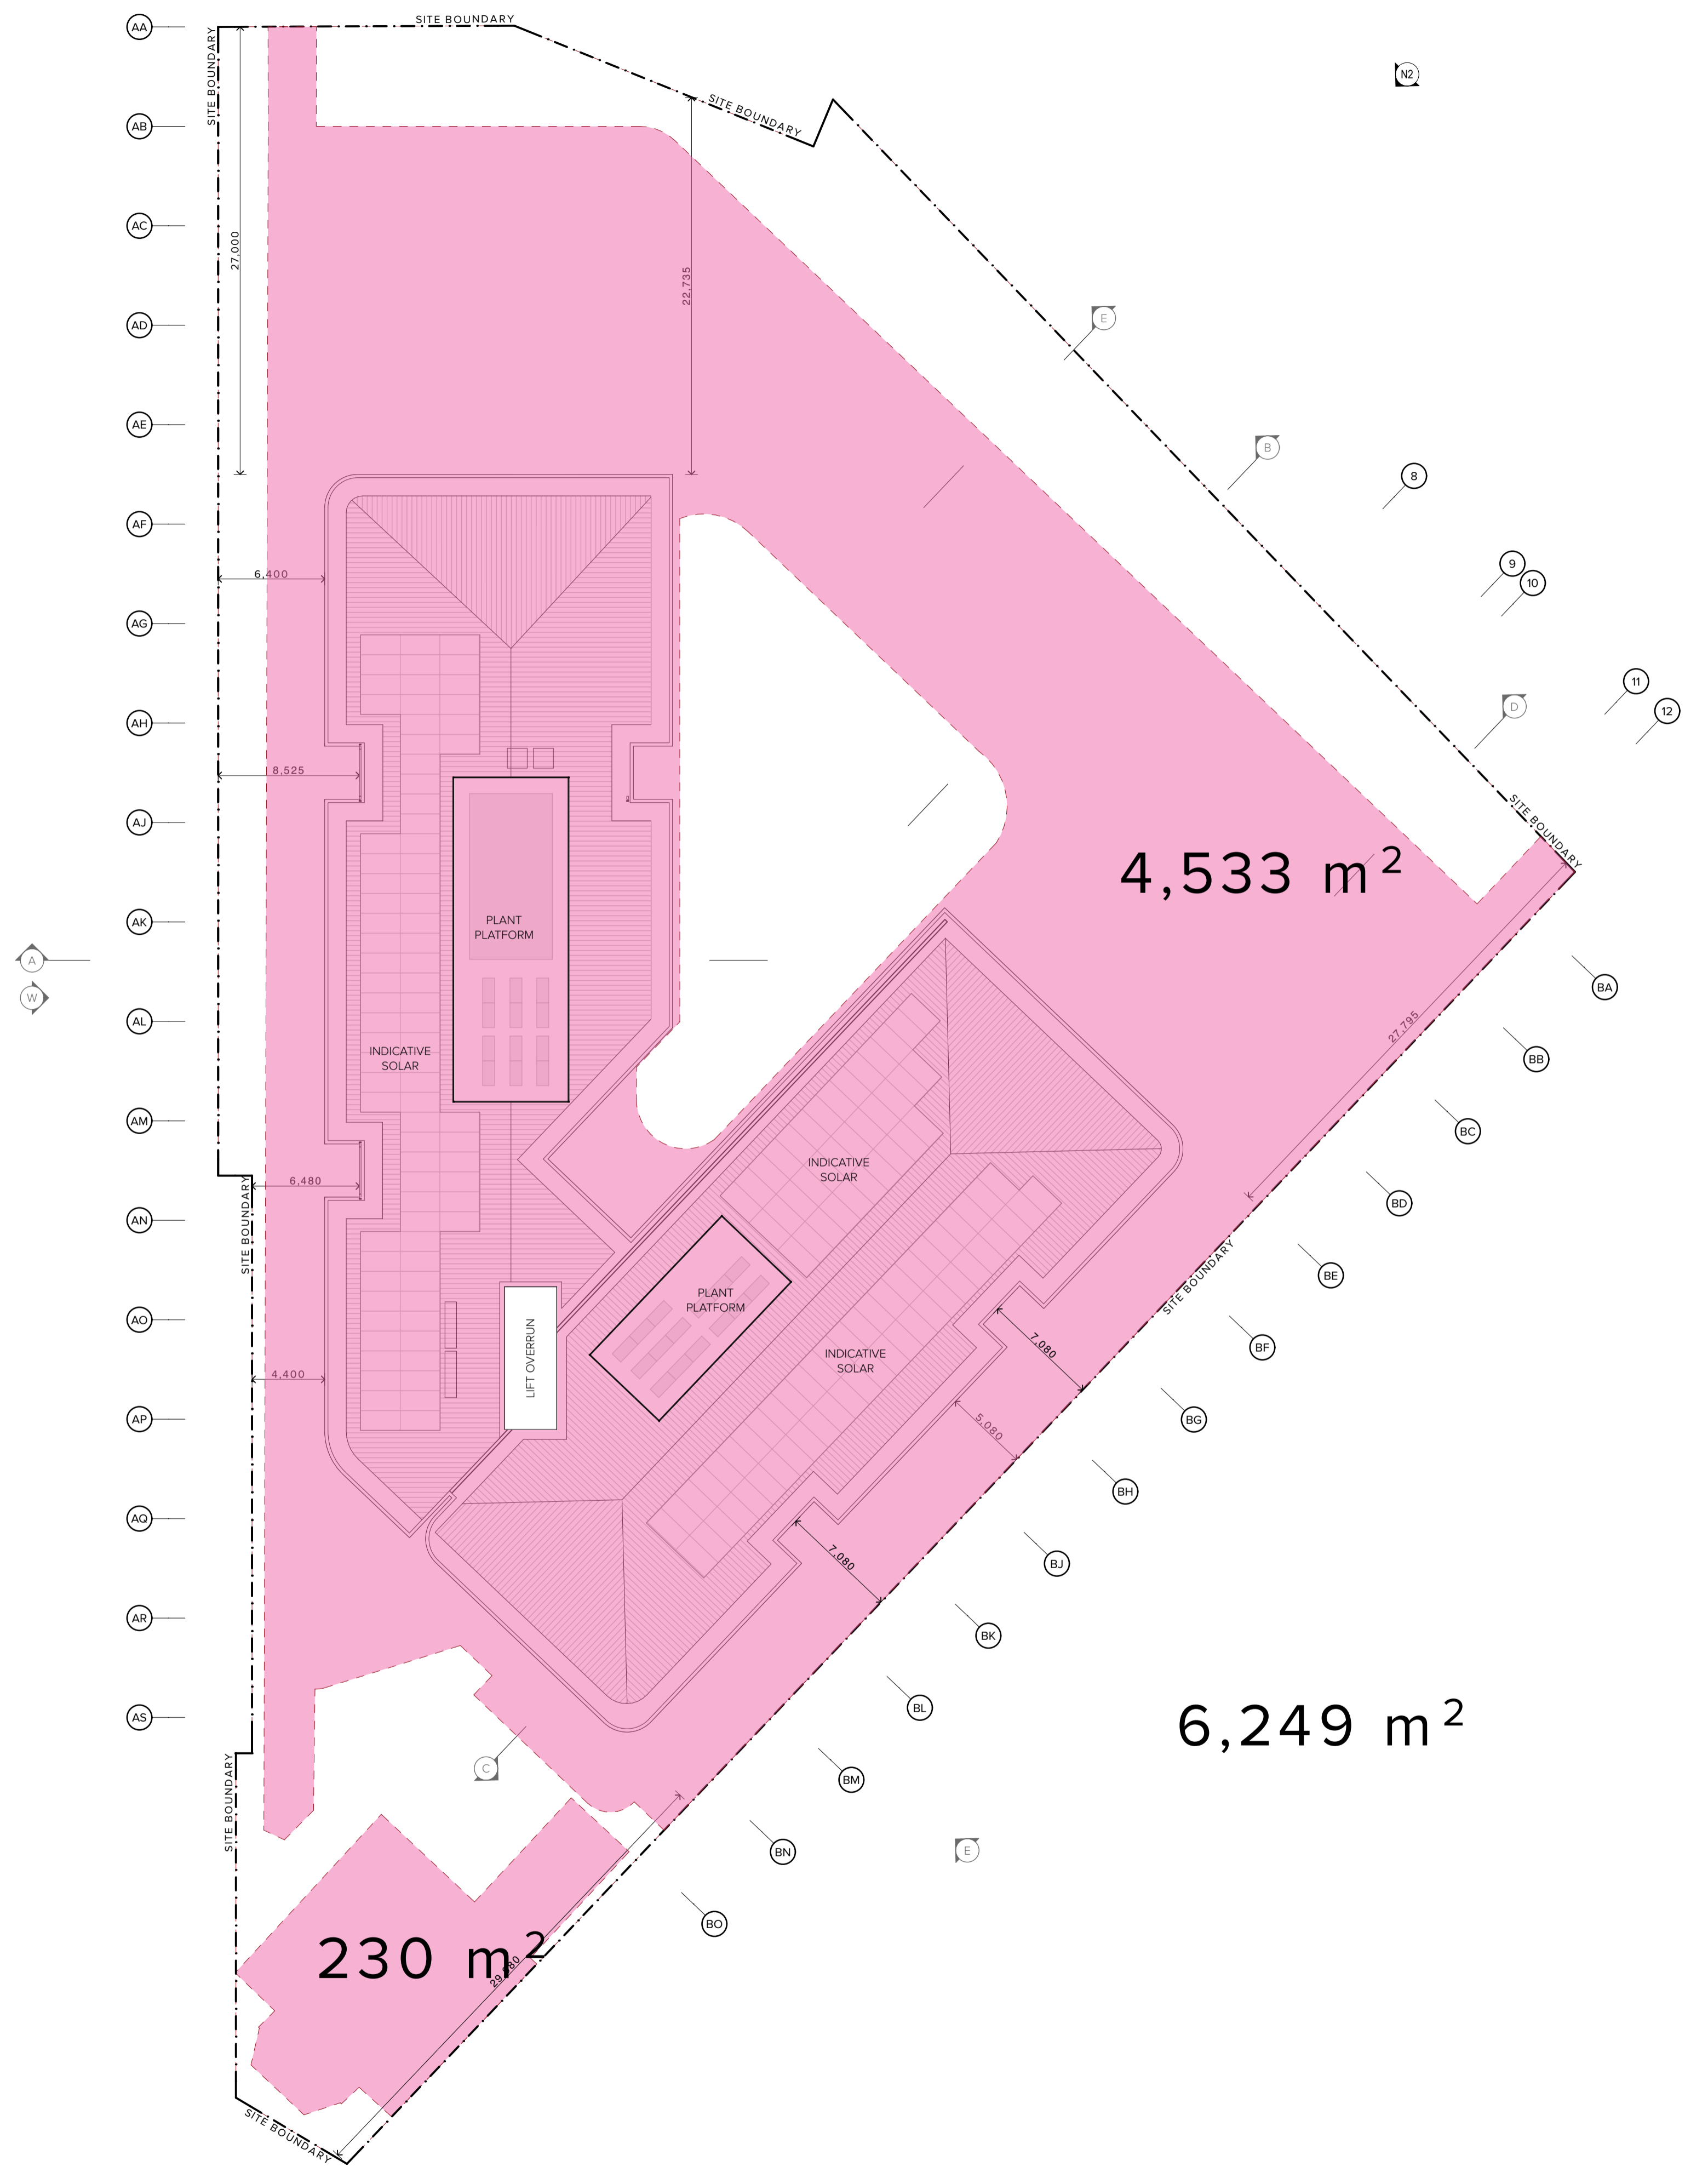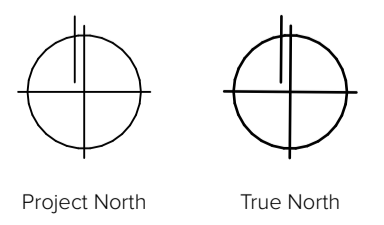

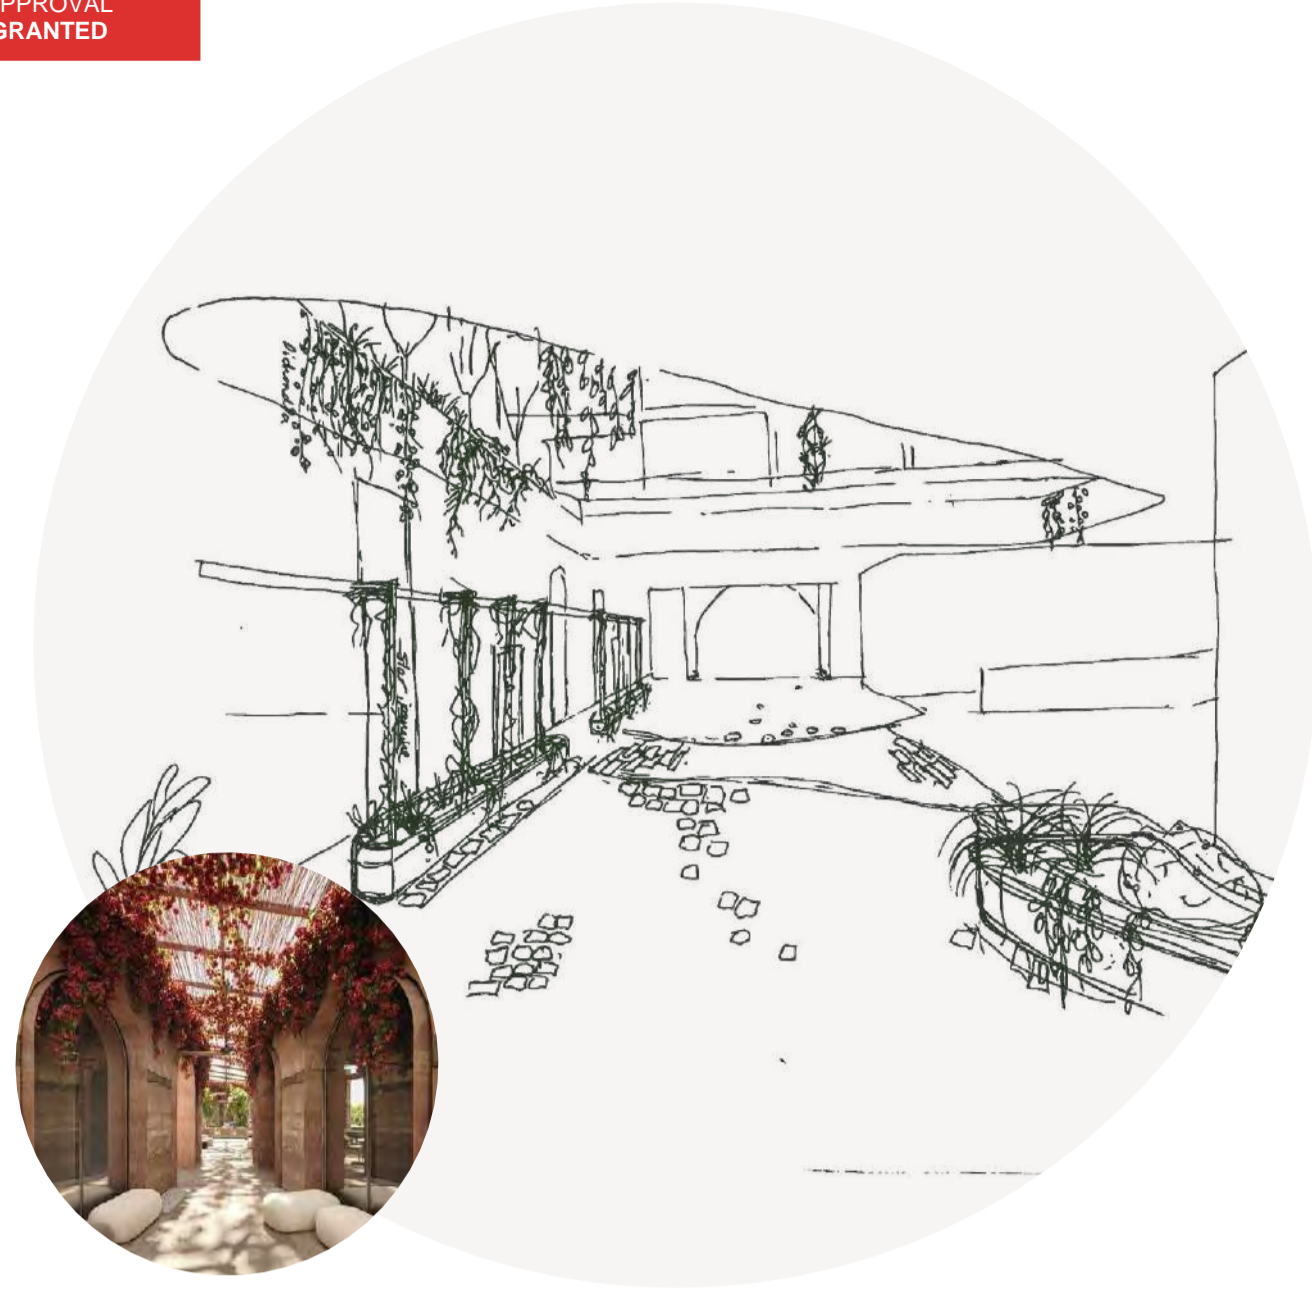

V1

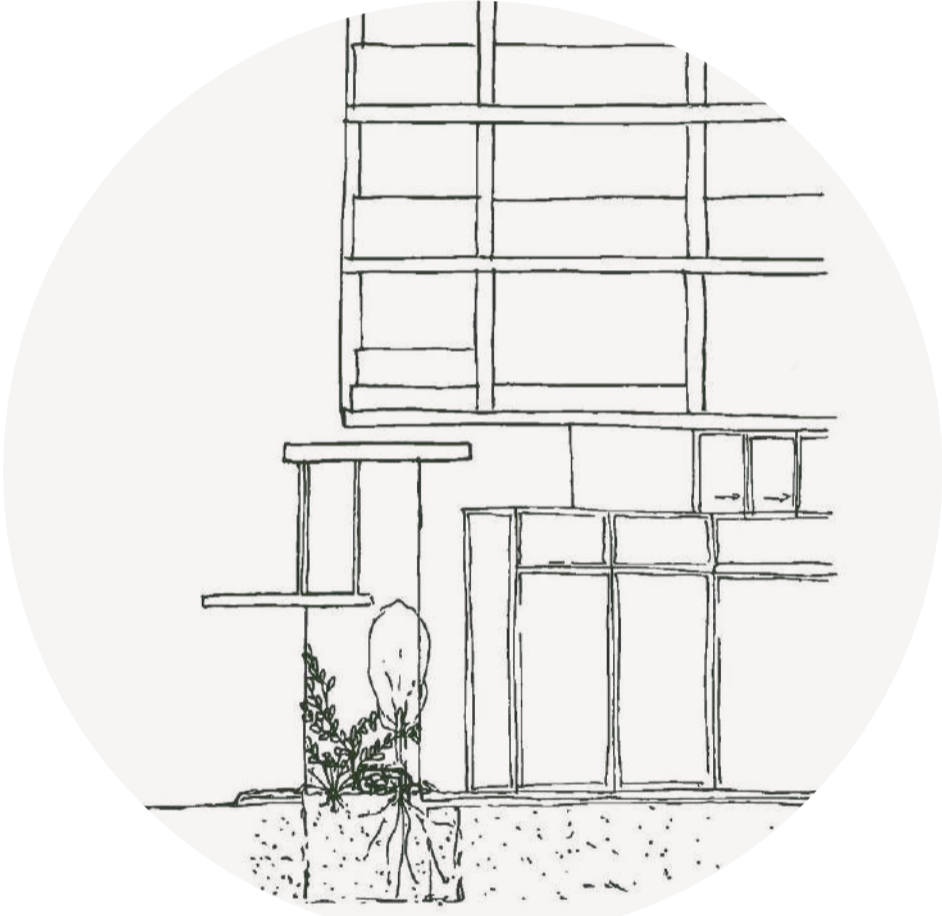

SECTION A-A



V2




GREEN WALL PERSPECTIVE
DIRECT LIGHT AS PER IMAGE FOR APPROX. 1 HOUR A DAY. INDIRECT LIGHT FOR THE REMAINDER OF THE DAY.



GREEN WALL SECTION DETAIL


| GROUND FLOOR CALCULATIONS | |
|---|--|
| EXISTING JACARANDA - 103m ² | |
| EXISTING TREES - 35 m ² | |
| EXISTING TREE CANOPY = 97 m ² | |
| NEW JACARANDA CANOPY - 17m ² | |
| NEW TREE CANOPY = 184m ² | |
| TOTAL TREE CANOPY = 1,101m ² | |
| PRIVATE OUTDOOR SPACE DEEP SOIL - 429m ² | |
| PUBLIC DEEP SOIL - 429m ² | |
| DEEP SOIL TOTAL AREA = 858 m ² | |
| 14% OF SITE AREA ON GROUND FLOOR | |
| PLANTERS - 19m ² | |
| COURTYARD PLANTERS - 103m ² | |
| GREEN WALL - 7m ² | |
| PLANTER TOTAL AREA = 129 m ² | |
| TOTAL SOFT LANDSCAPING = 1,028 m ² | |
| 16% OF SITE AREA ON GROUND FLOOR | |

| OVERALL CALCULATIONS | |
|--|--|
| TOTAL TREE CANOPY = 1,553 m ² | |
| DEEP SOIL TOTAL AREA = 1,068 m ² | |
| 17% OF SITE AREA | |
| TOTAL SOFT LANDSCAPING (DEEP SOIL & PLANTERS) = 1,312 m ² | |
| 21% OF SITE AREA | |

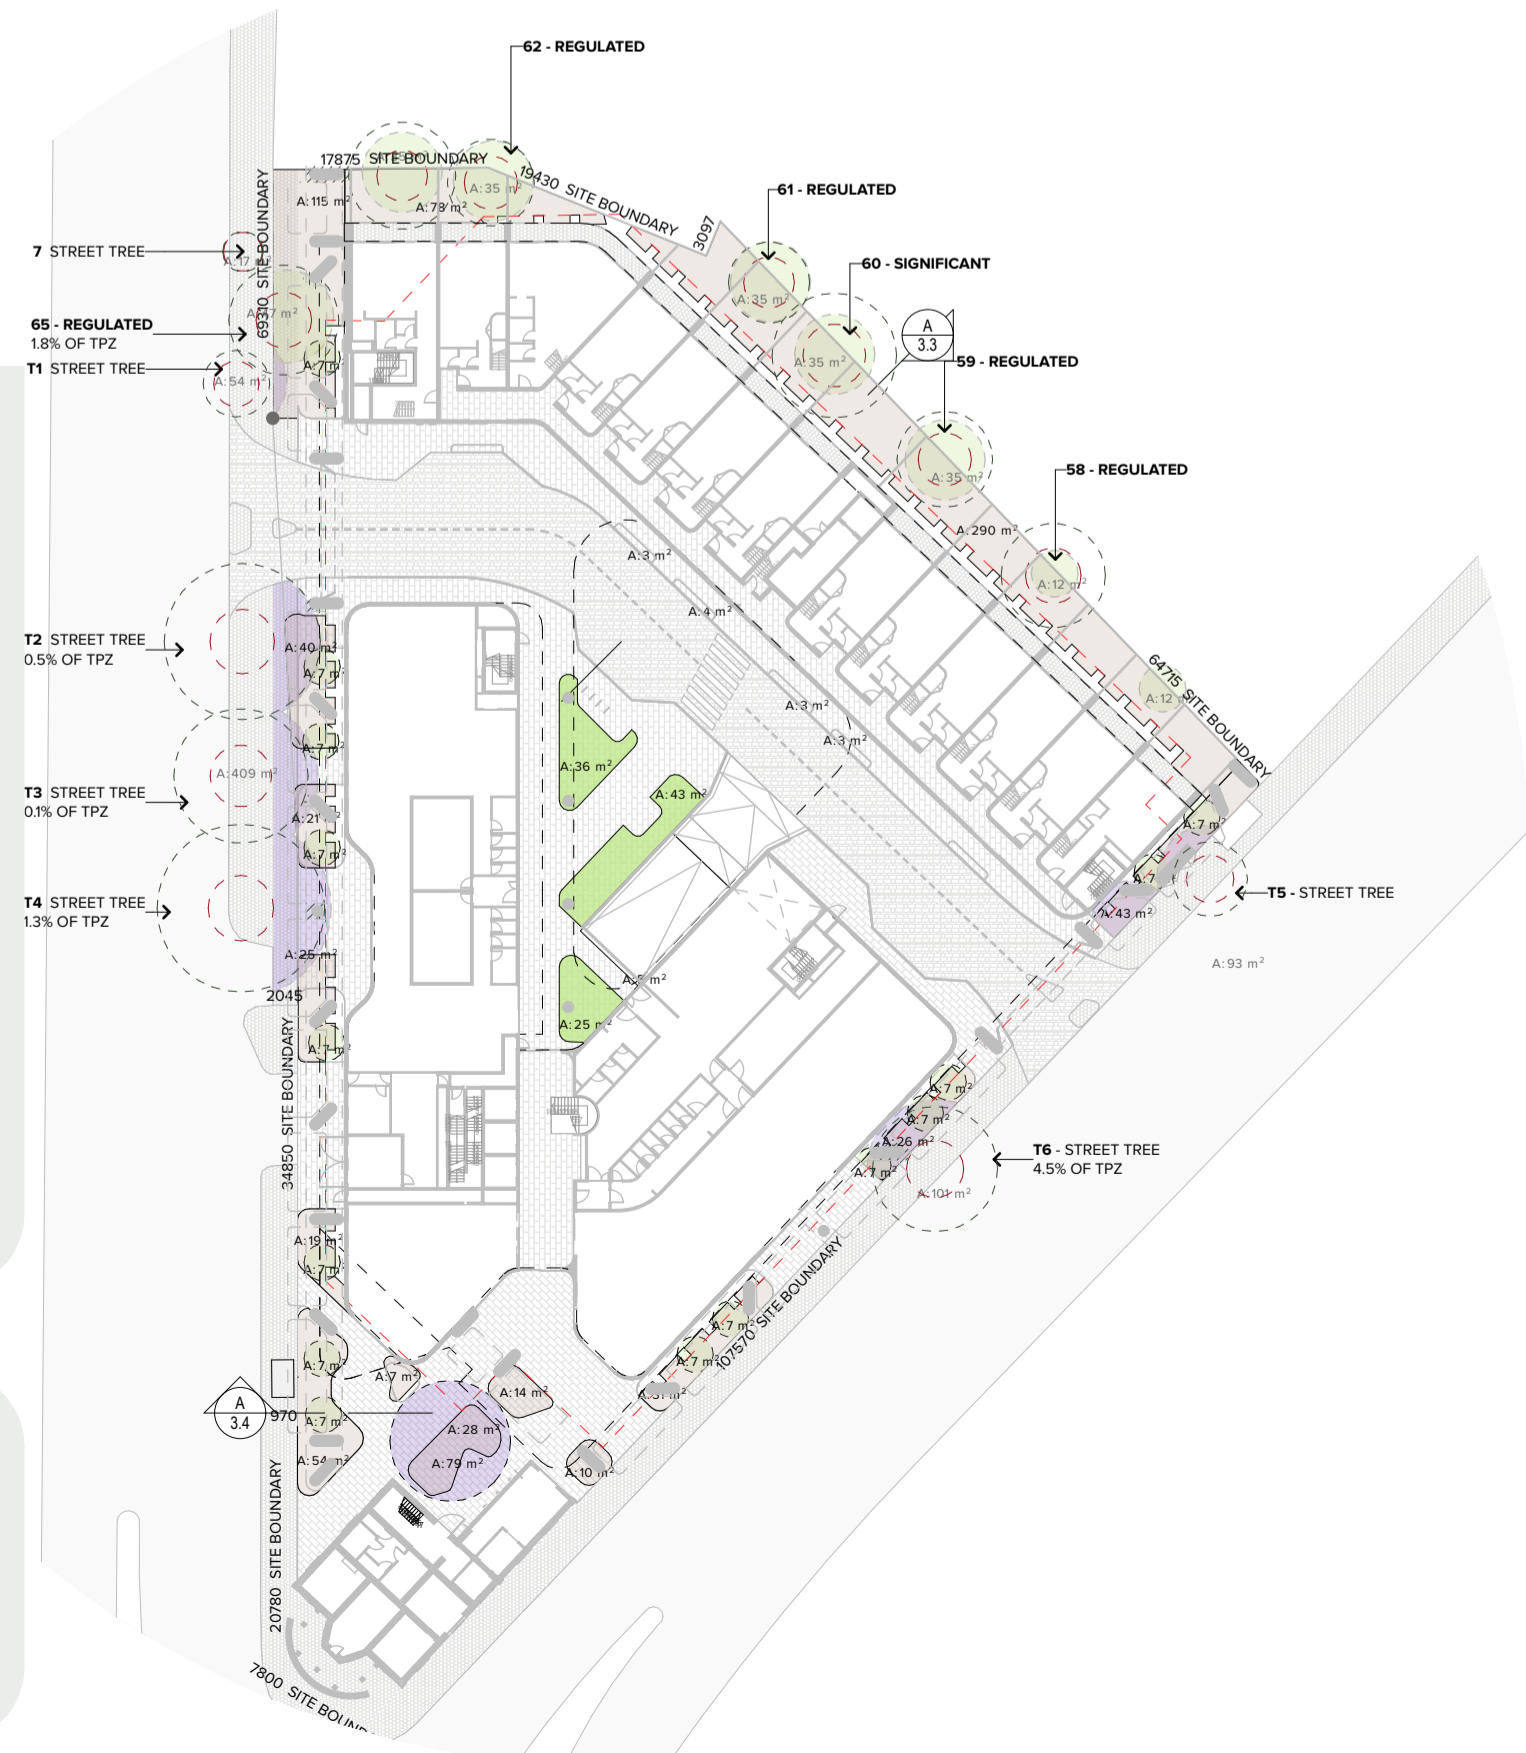



V 3

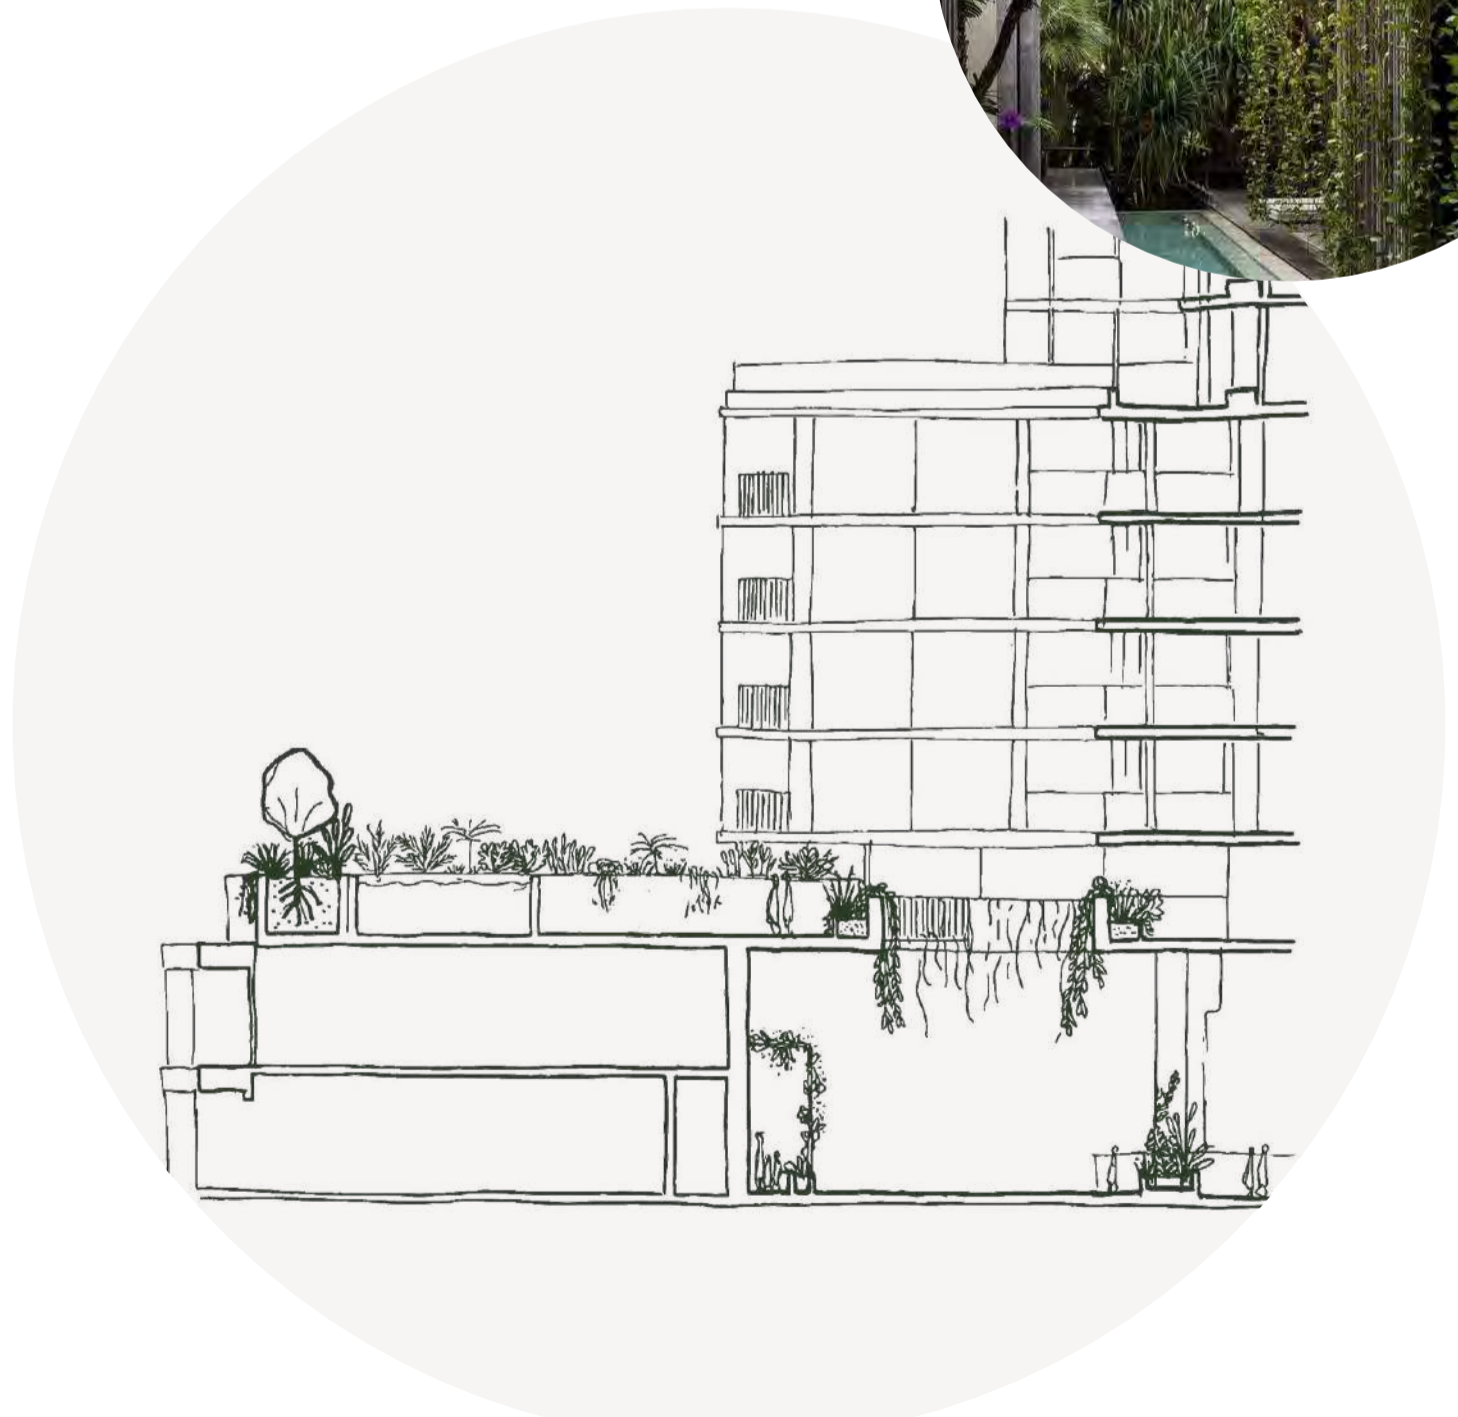

SECTION B-B



LEVEL 2 CALCULATIONS

| | |
|-----------------------------------|----------------------------|
| TREE CANOPY | = 93m ² |
| TOTAL COVER | = 452 m² |
| PUBLIC DEEP SOIL | = 226m ² |
| DEEP SOIL TOTAL AREA | = 226 m² |
| 4% OF SITE AREA ON LEVEL 1 | |
| GROUND COVER | = 186m ² |
| TOTAL SOFT LANDSCAPING | = 284 m² |
| 5% OF SITE AREA ON LEVEL 1 | |

OVERALL CALCULATIONS

| | |
|---|------------------------|
| TOTAL TREE CANOPY | = 1,553 m ² |
| DEEP SOIL TOTAL AREA | = 1,068 m ² |
| 17% OF SITE AREA | |
| TOTAL SOFT LANDSCAPING (DEEP SOIL & PLANTERS) | = 1,312 m ² |
| 21% OF SITE AREA | |



GROUND FLOOR PERIMETER PLANTING

| | | | | | |
|---------------------------|---|---|--|--|---|
| GROUND COVER AND CLIMBERS | <p>F: ASTERACEAE S: Senecio serpens C: Blue chalksticks O: South Africa H: 0.1-0.3 S: 0.6-1m</p> | <p>F: MYOPORACEAE S: Myoporum parvifolium C: Creeping Boobialla O: SA, Vic, NSW H: 0-0.2 S: 1.5-2</p> | <p>F: FAB S: Hardenbergia violacea 'Happy Wanderer' C: Purple Coral Pea O: Adelaide Plains H: 0.4-0.5m S: 2-5m</p> | <p>F: CONVOLVULACEAE S: Dichondra repens C: Kidney weed O: NZ, Aust H: 0.2m S: 1-2m</p> | <p>F: MORACEAE S: Ficus pumila C: Creeping Fig O: East Asia H: 6m S: 6m</p> |
| GRASSES | <p>F: LILIACEAE S: Lomandra longifolia C: Tanika O: n/a H: 0.5-0.6m S: 0.5-0.6m</p> | <p>F: POACEAE S: Pennisetum alopecuroides C: Cream Lea or Swamp Foxtail Grass O: H: 6-15m S: 0.6-1m</p> | <p>F: GRAMINEAE S: Poa labillardierei C: Meadow-grass/Tussock-grass O: SA H: 0.5-1.3m S: 0.3-0.7m</p> | <p>F: CYPERACEAE S: Ficinia nodosa C: Knobby club-rush O: SA, Vic, NSW, WA, Qld, Tas H: 0.5-1.5m S: 0.6-2m</p> | <p>F: JUNCACEAE S: Juncus pallidus C: Pale-rush O: SA Vic NSW Tas WA H: 0.5-2.3m S: 0.3-1m</p> |
| PURPLE PLANTS | <p>F: LILIACEAE S: Anthropodium strictum C: Chocolate Lily O: SA, Vic, NSW, Tas H: 0.2-0.3m S: 0.2-0.2m</p> | <p>F: LILIACEAE S: Dianella revoluta 'Little Rev' C: Blue Flax-lily O: Qld, NSW, Vic, Tas, SA, WA H: 0.3-1m S: 0.5-2m</p> | <p>F: GOODENACEAE S: Scaevola aemula C: Fairy Fan O: SA, WA, Vic, Tas H: 0.3-0.5m S: 0.3-1m</p> | <p>F: PLUMBAGINACEAE S: Limonium prezii C: Sea Lavender O: Canary Islands H: 0.6-0.9m S: 0.6-0.9m</p> | <p>F: LAMIACEAE S: Lavandula angustifolia C: English Lavender O: Mediterranean H: 1.15m S: 0.8-1m</p> |
| TREES | <p>F: BIGNONIACEAE S: Jacaranda mimosifolia C: Jacaranda O: South America H: 8-10m S: 8-10m</p> | <p>F: GINKGOACEAE S: Ginkgo biloba 'Mariken' C: Maidenhair Tree O: China H: 3m S: 4-5m</p> | | | |

LEVEL 2 POOL

| | | | | | |
|-----------------------------------|--|---|---|---|---|
| GROUND COVER AND CASCADING PLANTS | <p>F: CONVOLVULACEAE S: Dichondra repens C: Kidney weed O: NZ, Aust H: 0.2m S: 1-2m</p> | <p>F: MORACEAE S: Ficus pumila C: Creeping Fig O: East Asia H: 6m S: 6m</p> | <p>F: CONVOLVULACEAE S: Dichondra repens C: Silver Falls O: Mexico H: 0.05-0.1m S: 1.5m Fall</p> | <p>F: ASTERACEAE S: Senecio rowleyanus C: String of Pearls O: South West Africa H: 1m Fall</p> | <p>F: MORACEAE S: Ficus pumila C: Creeping Fig O: East Asia H: 6m S: 6m</p> |
| PLANTS | <p>F: ASTERACEAE S: Ligularia reniformis C: Tractor Seal Plant O: Japan H: 1m S: 1m</p> | <p>F: CAPRIFOLIACEAE S: Viburnum odoratissimum 'Green Emerald' C: Sweet Viburnum O: China H: 3.5-4m S: 1.5-2m</p> | <p>F: ASPARAGACEAE S: Sanevieria Laurentii C: Snake plant, Mother in Law's Tongue O: West Africa H: 0.7-0.9m S:</p> | <p>F: FABACEAE S: Acacia cognat C: Acacia Lime-light O: H: 0.5-1.2m S: 1.15m</p> | <p>F: CYCADACEAE S: Cycas revoluta C: Sago Palm O: Japan H: 2-2.5m S: 2-2.5m</p> |
| PLANTS | <p>F: ARACEAE S: Thaumatococcus danianus C: Philodendron xanadu O: Brazil H: 0.9-1.5m S: 0.9-1.5m</p> | <p>F: ARACEAE S: Monstera deliciosa C: Swiss cheese plant or split-leaf philodendron O: Southern Mexico H: 4-5m S: 2-3m</p> | <p>F: STRELITZIACEAE S: Strelitzia nicotai C: Wild banana or giant white bird of paradise O: South Africa, Mexico H: 6m S: 3m</p> | <p>F: ARACEAE S: Chamaedorea cataractarum C: Cascade palm O: South Mexico, Centra America H: 2m S: 1.8m</p> | <p>F: AGAVACEAE S: Agave attenuata C: Swan Neck Agave O: Mexico H: 1.5 S: 1.5</p> |
| TREES | <p>F: CYATHEACEAE S: Cyathea australis C: Rough Tree Fern O: Qld, NSW, Vic, Tas H: 9-10m S: 1.5-3m</p> | <p>F: LAURACEAE S: Laurus nobilis C: Sweet Bay O: Mediterranean H: 5-6m S: 2-3m</p> | <p>F: APOCYNACEAE S: Plumeria rubra C: Frangipani O: Central and South America H: 5-8m S: 5-8m</p> | <p>F: AGAVACEAE S: Dracaena draco C: Dragon's Blood Tree O: Canary Islands H: 8-9m S: 5-6m</p> | <p>F: Poaceae S: Bambusa toxis 'Gracilis' C: Slender Weaver Bamboo O: China H: 6-8m</p> |


GROUND FLOOR COURTYARD PLANTING

| | | | |
|---------------------------|---|--|--|
| GROUND COVER AND CLIMBERS | <p>F: MYOPORACEAE S: Myoporum parvifolium C: Creeping Boobialla O: SA, Vic, NSW H: 0-0.2 S: 1.5-2</p> | <p>F: CONVOLVULACEAE S: Dichondra repens C: Kidney weed O: NZ, Aust H: 0.2m S: 1-2m</p> | <p>F: MORACEAE S: Ficus pumila C: Creeping Fig O: East Asia H: 6m S: 6m</p> |
| PLANTS | <p>F: ARACEAE S: Thaumatococcus danianus C: O: Brazil H:</p> | <p>F: ARACEAE S: Monstera deliciosa C: Swiss cheese plant or split-leaf philodendron O: Southern Mexico H:</p> | <p>F: STRELITZIACEAE S: Strelitzia nicotai C: Wild banana or giant white bird of paradise O: South Africa, Mexico H:</p> |
| ARBOR CLIMBING PLANT | <p>F: NYCTAGINACEAE S: Bougainvillea glabra C: Paper Flower O: Brazil H: 3-5m S: 1.5m-3</p> | | |

GREEN WALL PLANTING

| | | | | |
|--------|---|--|--|---|
| PLANTS | <p>F: CONVOLVULACEAE S: Dichondra repens C: Silver Falls O: Mexico H: 0.05-0.1m S: 1.5m Fall</p> | <p>F: NEPHROLEPIDACEAE S: Nepenthes exaltata C: Boston Fern O: South America, Mexico H: 0.6-0.9m S: 0.6-0.9m</p> | <p>F: COMMELINACEAE S: Tradescantia pallida C: Purple heart O: Mexico H: 0.3-0.6m S: 0.3-0.6m</p> | <p>F: CYPERACEAE S: Carex oshimensis 'Feather Falls' C: Japanese Sedge O: Japan H: 0.3-0.6m S: 0.3-0.6m</p> |
| PLANTS | <p>F: ARACEAE S: Thaumatococcus danianus C: Philodendron xanadu O: Brazil H: 0.9-1.5m S: 0.9-1.5m</p> | <p>F: LAMACEAE S: Ajuga reptans purpurea C: Purple leaf bugle O: N.W Africa, Europe, W Asia H: 0.2m S: 0.3m</p> | <p>F: ASPARAGACEAE S: Asparagus densiflorus 'Myersii' C: Foxtail Fern O: South Africa H: 0.5 S: 0.9m</p> | |

S M F A 24045 WALKERVALE TERRACE DEVELOPMENT R2.51 LANDSCAPE - PLANTING SCHEDULE OF PLANNING

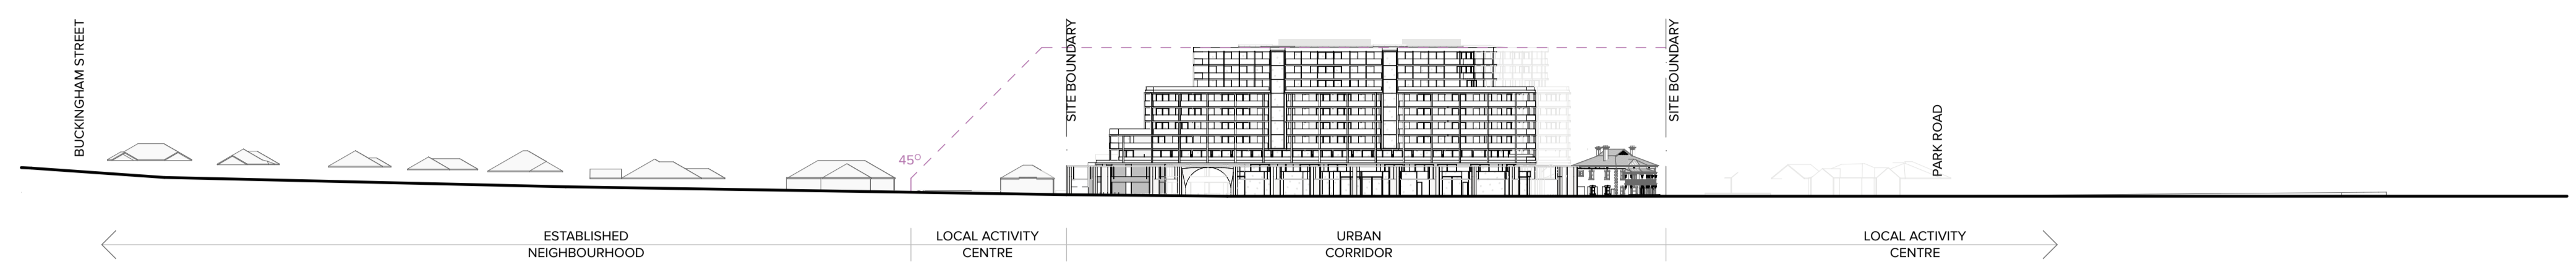

WEST STREET ELEVATION (NORTHCOTE TERRACE)
1:1000





NORTHCOTE TERRACE

WEST ELEVATION
1:200

MATERIALS
1:1

MATERIALS

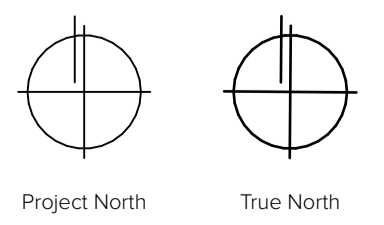

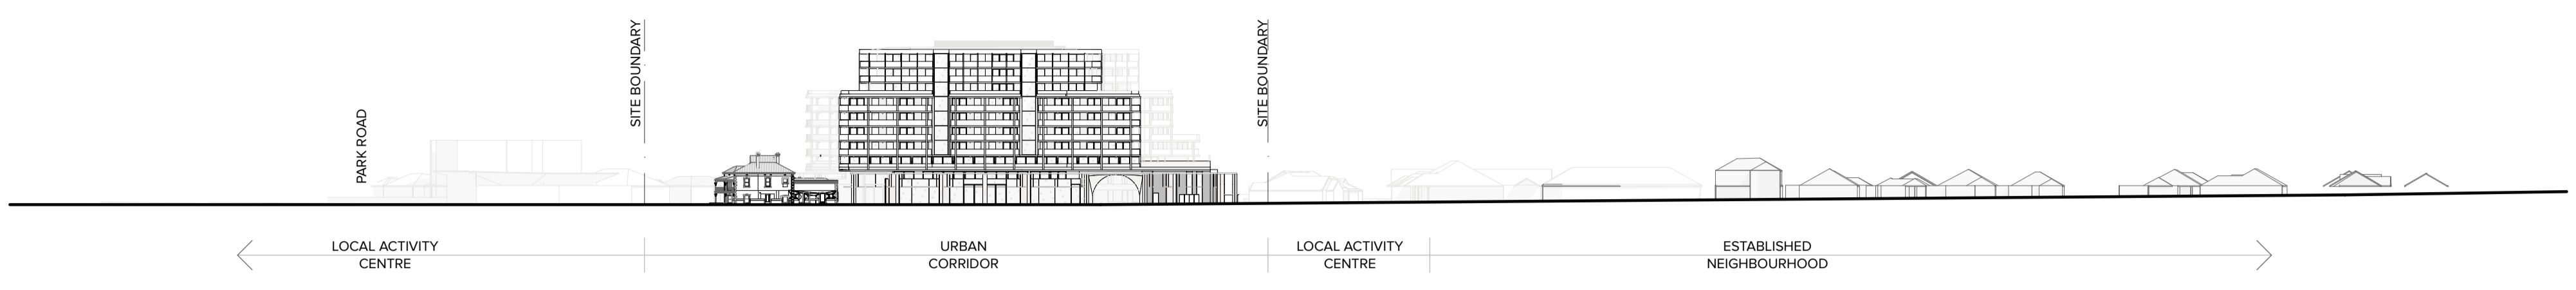


EAST STREET ELEVATION (WALKERVILLE TERRACE)
1:1000




WALKERVILLE TERRACE

EAST ELEVATION
1:200

MATERIALS

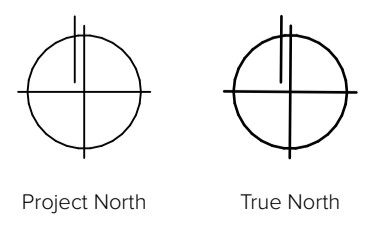




RF01
COLOURED CONCRETE MAROON



CNC01
CONCRETE WARM BEIGE TO MATCH SANDSTONE




ST01
SANDSTONE BLOCK CLADDING

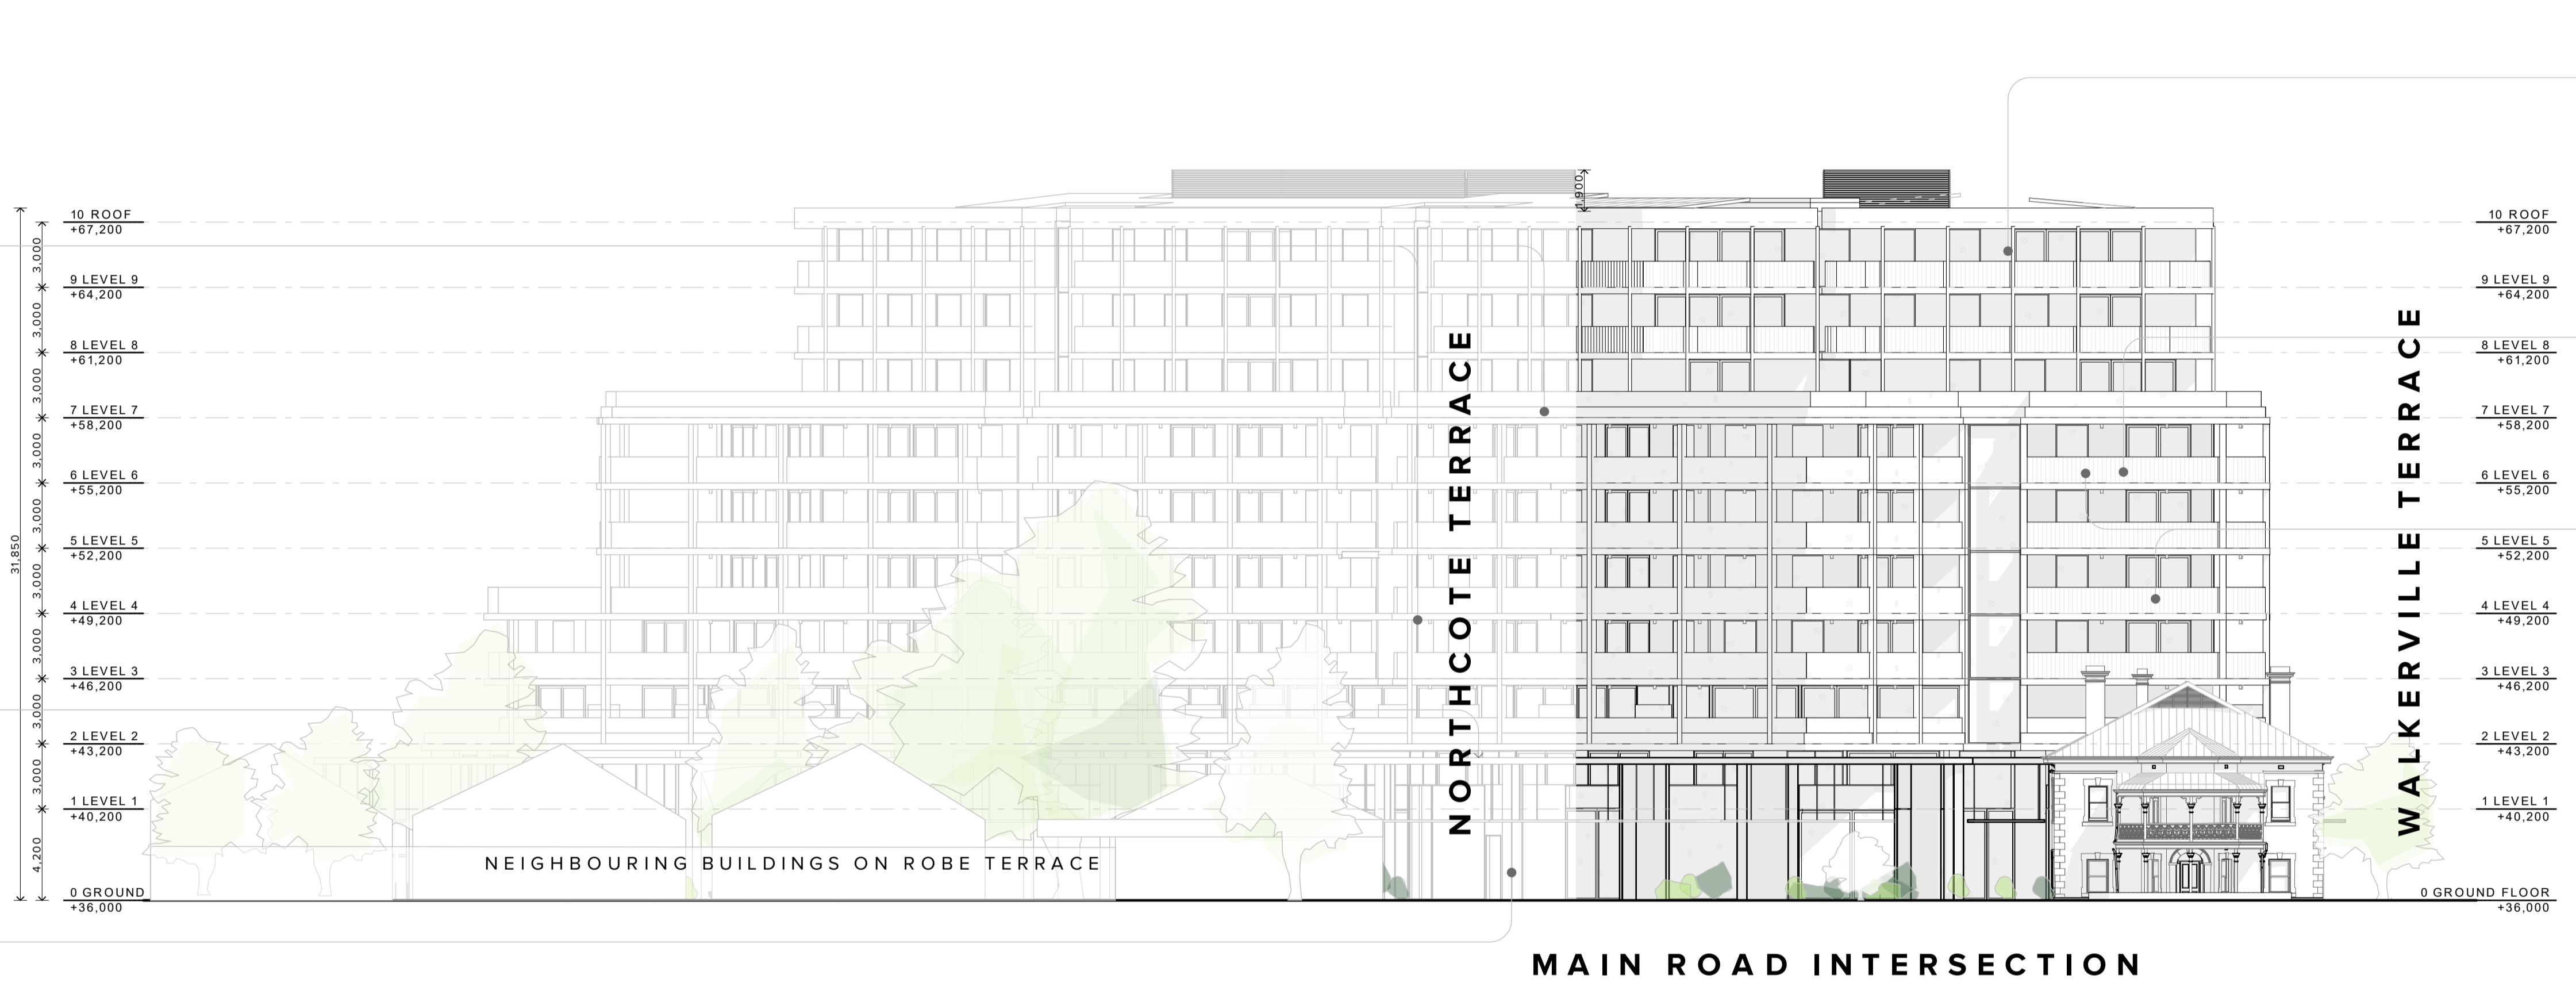

CL02
WALL CLADDING (LEVEL 7-9)




GL01
GLAZING



PF01
POWDER COAT FINISH MAROON

SOUTH ELEVATION
1:200

MATERIALS

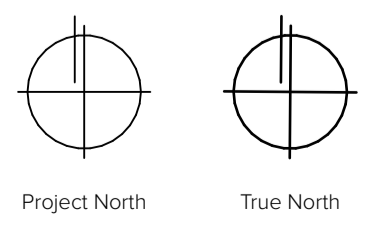







N1 NORTH ELEVATION
1:200






N2 NORTH ELEVATION
1:200

-  PF01 STEEL BALUSTRADE
-  CNC01 PLINTH TOP
-  BRK01 GROUND FLOOR APARTMENTS

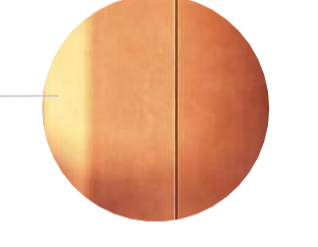
-  CL02 WALL CLADDING (LEVEL 7-9)
-  GL01 BALUSTRADE
-  RF01 COLUMNS, SLAB EDGE AND SOFFITS (LEVEL 2-6)
-  GL01 DOOR & WINDOW

MATERIALS

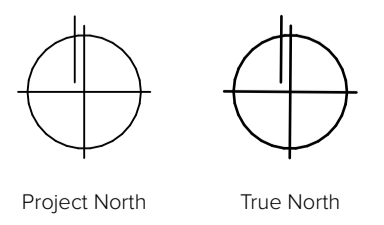


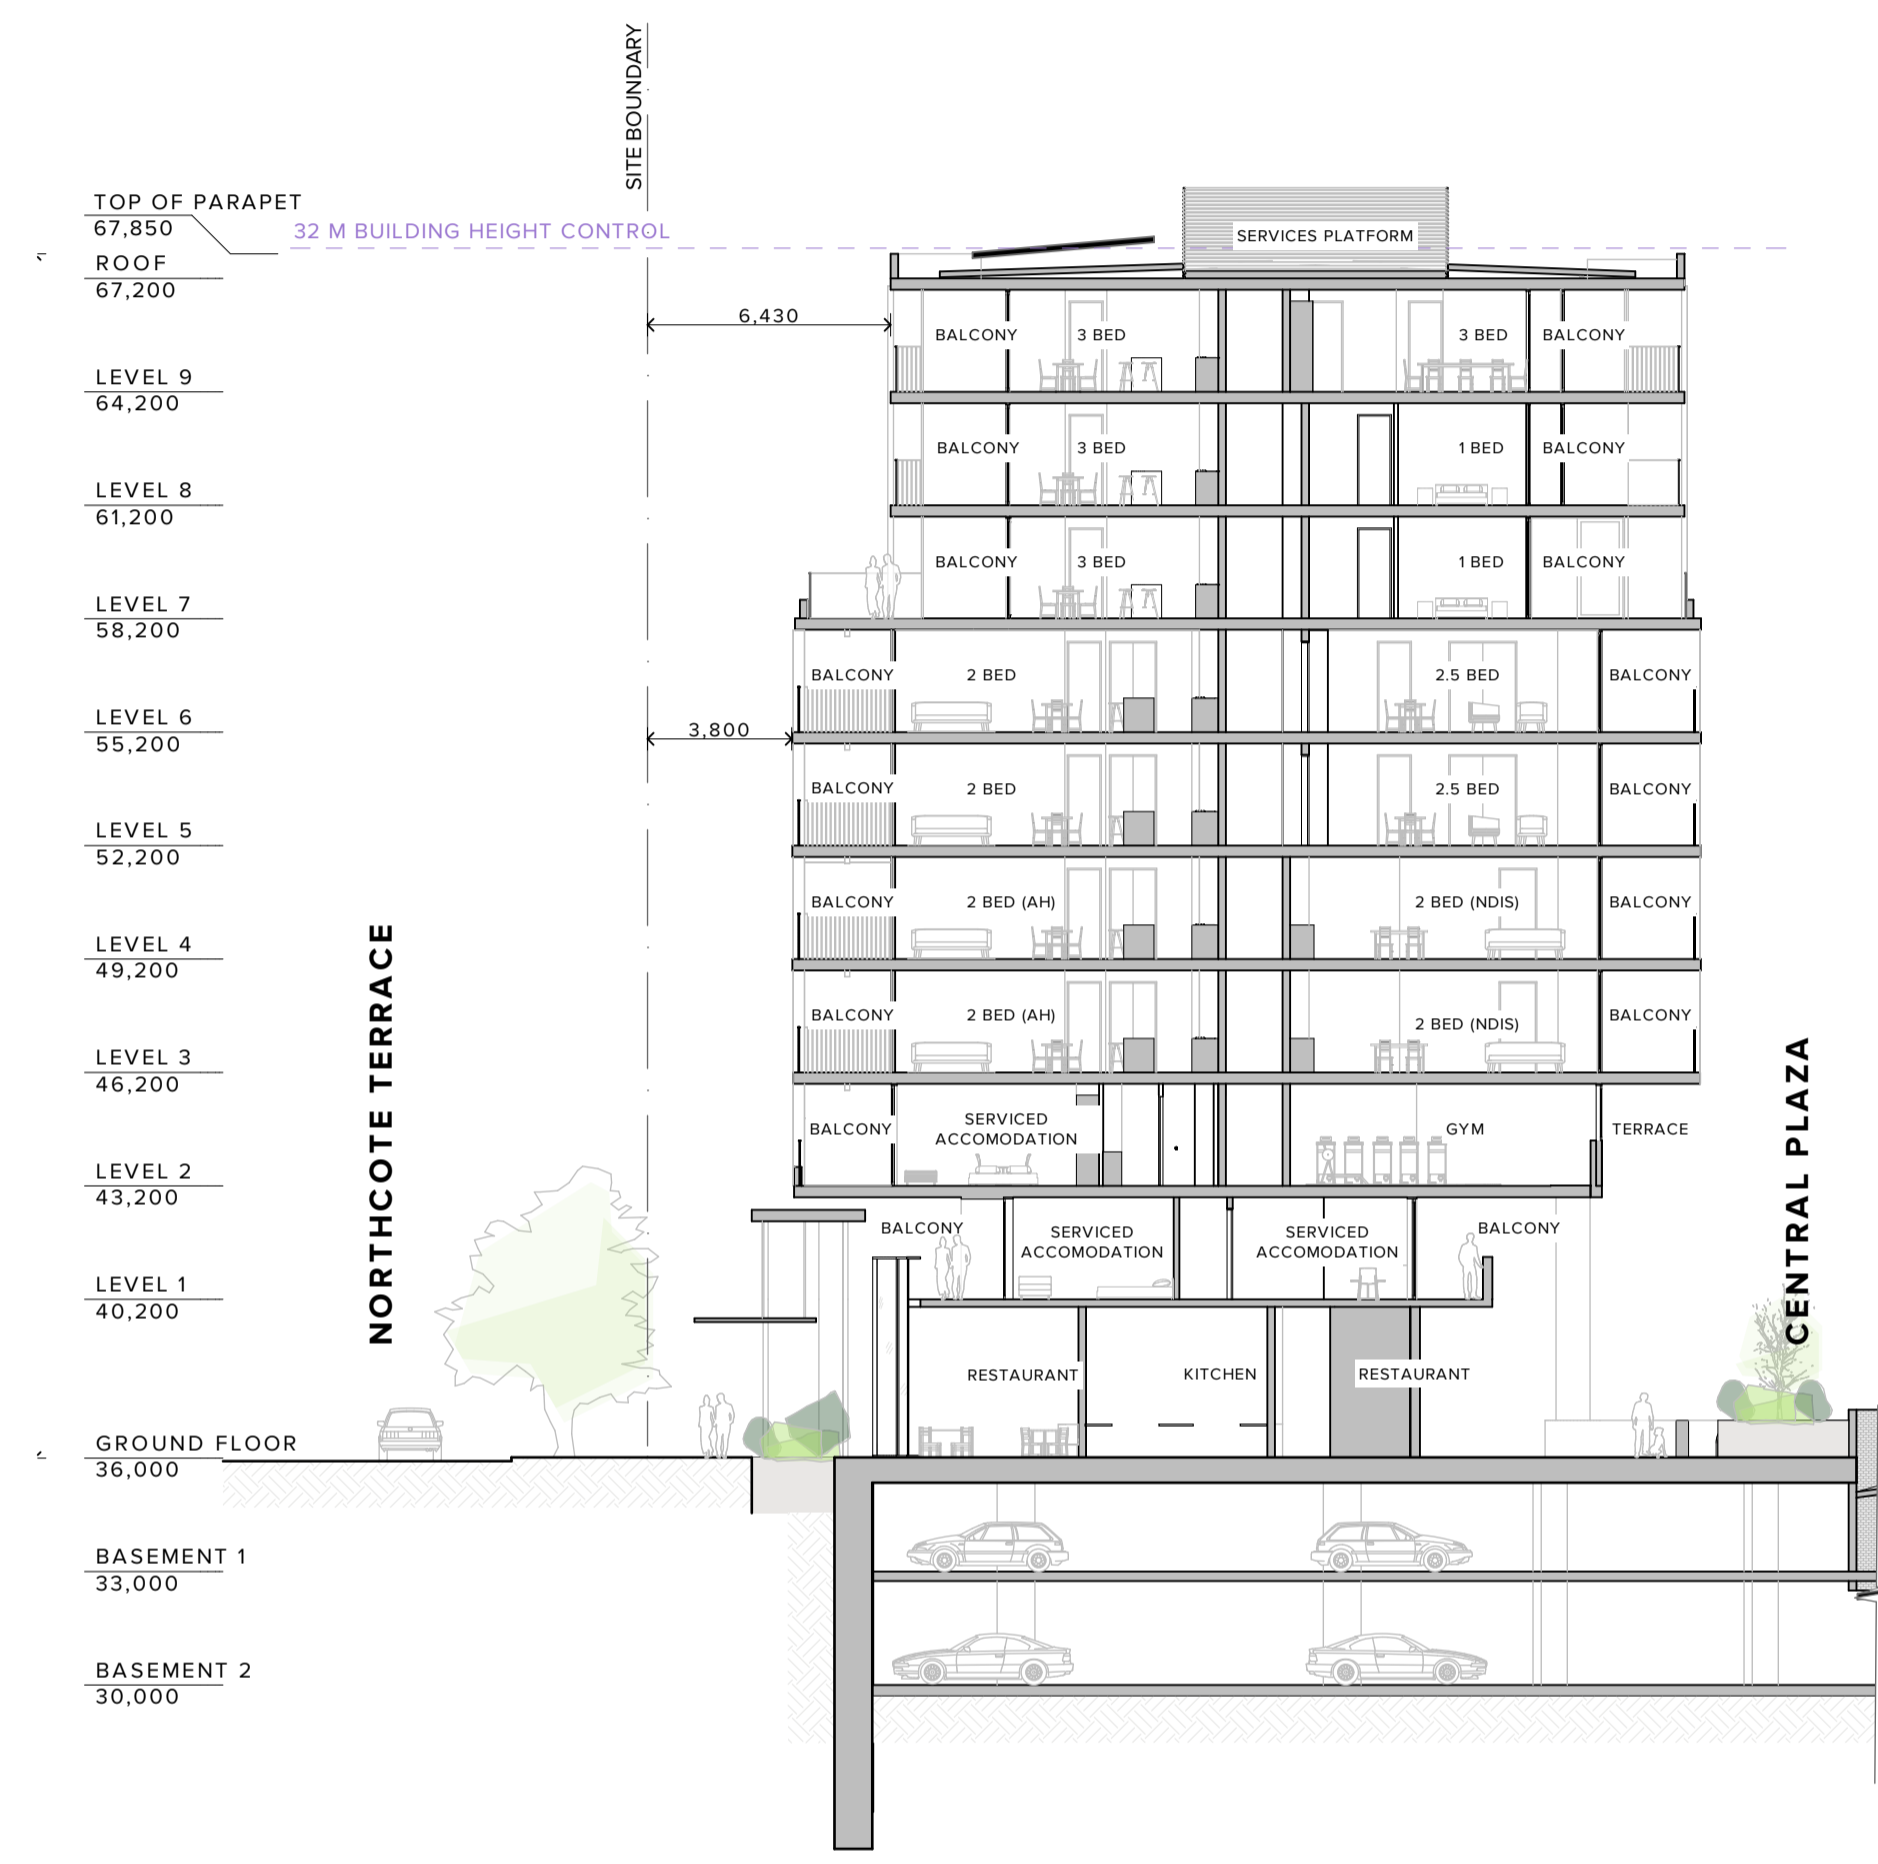


SECTION A
1:200

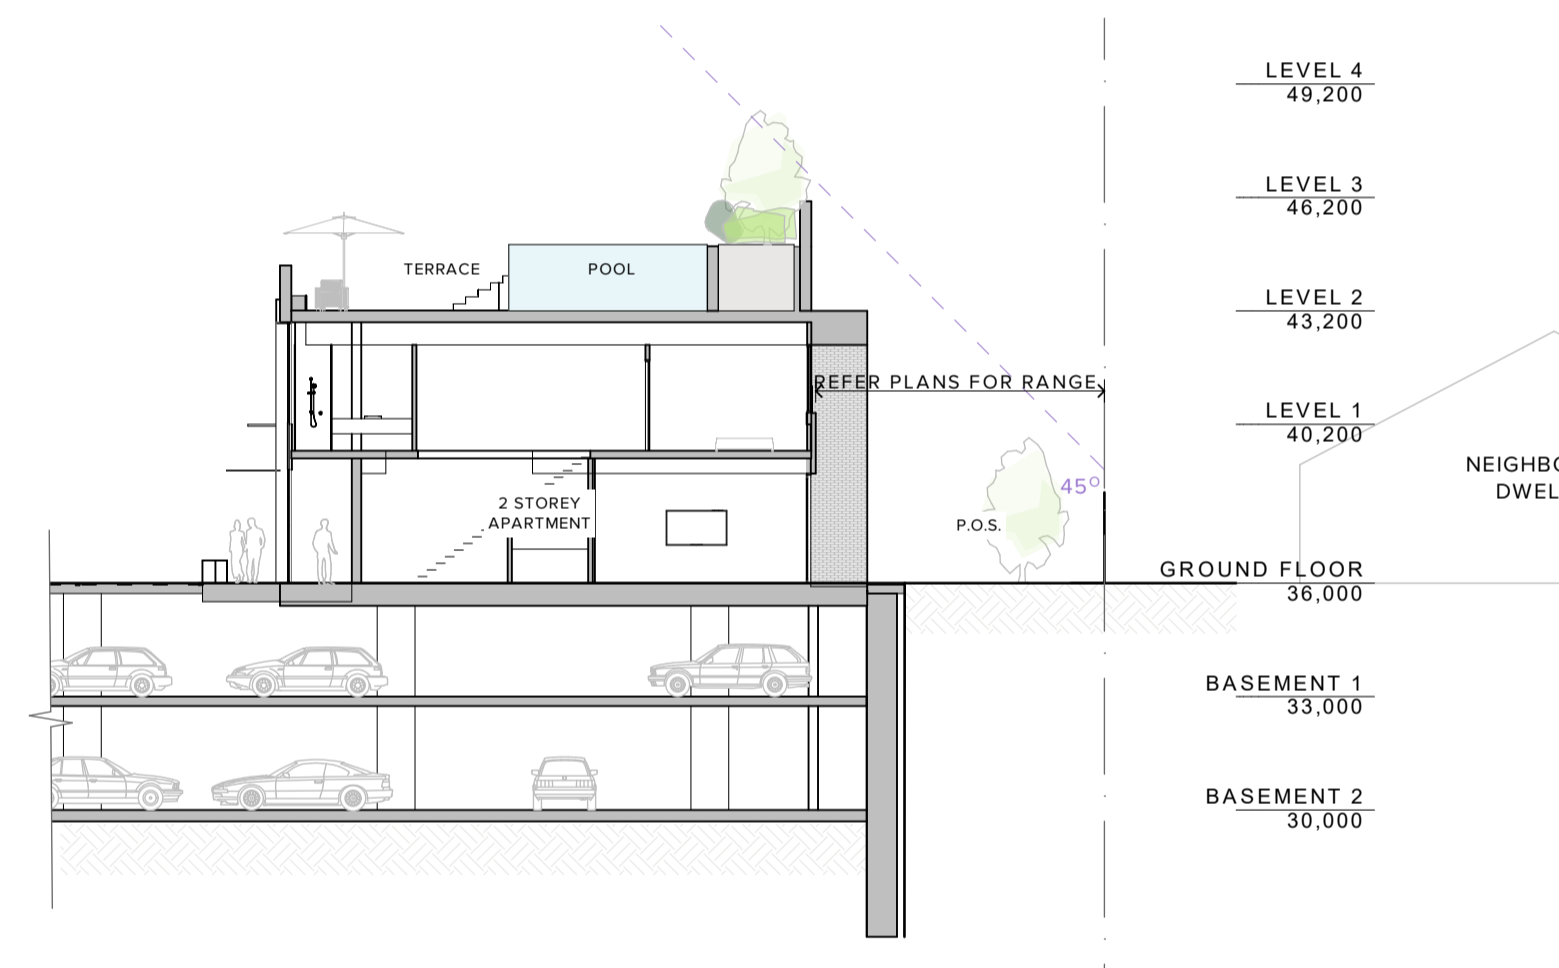


SECTION B
1:200

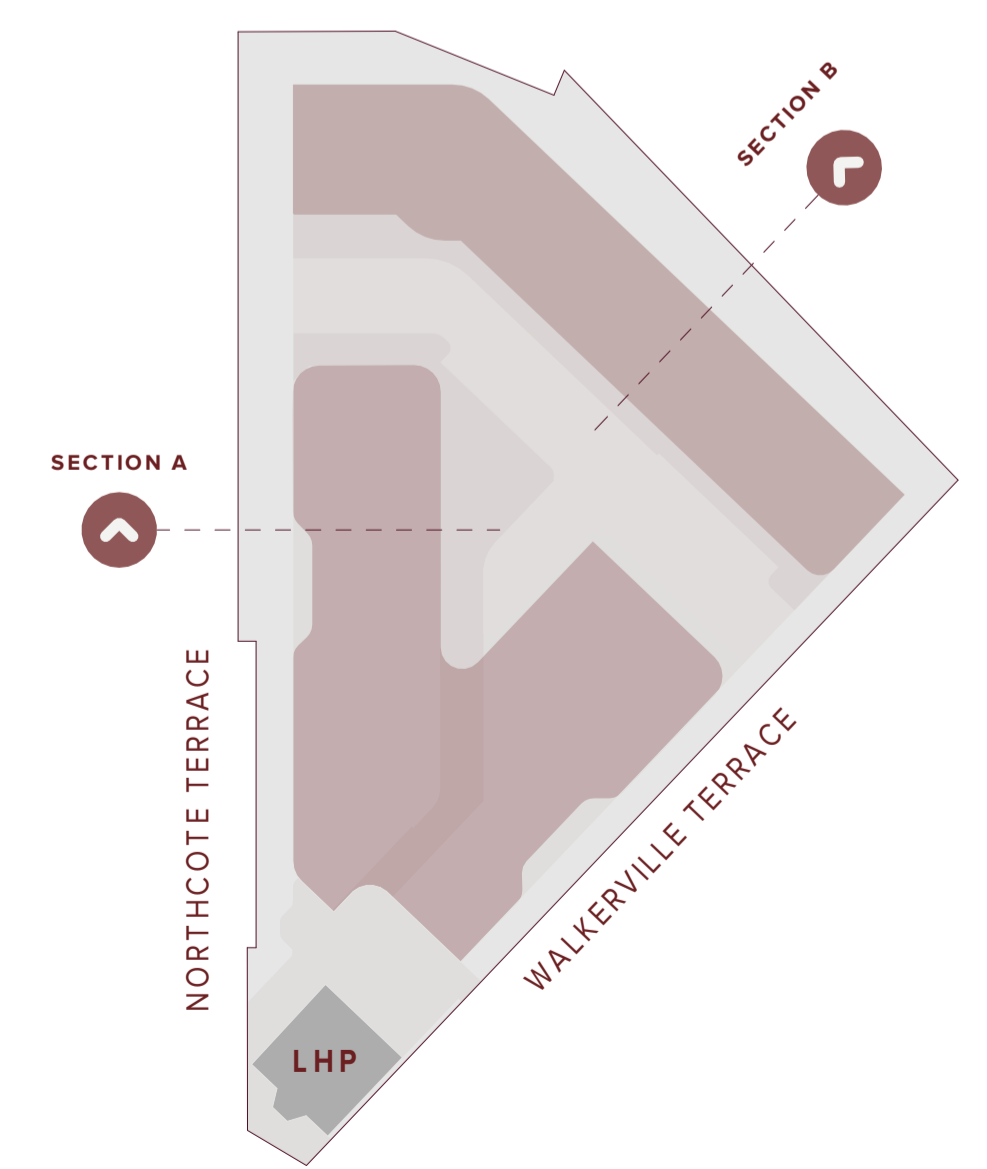

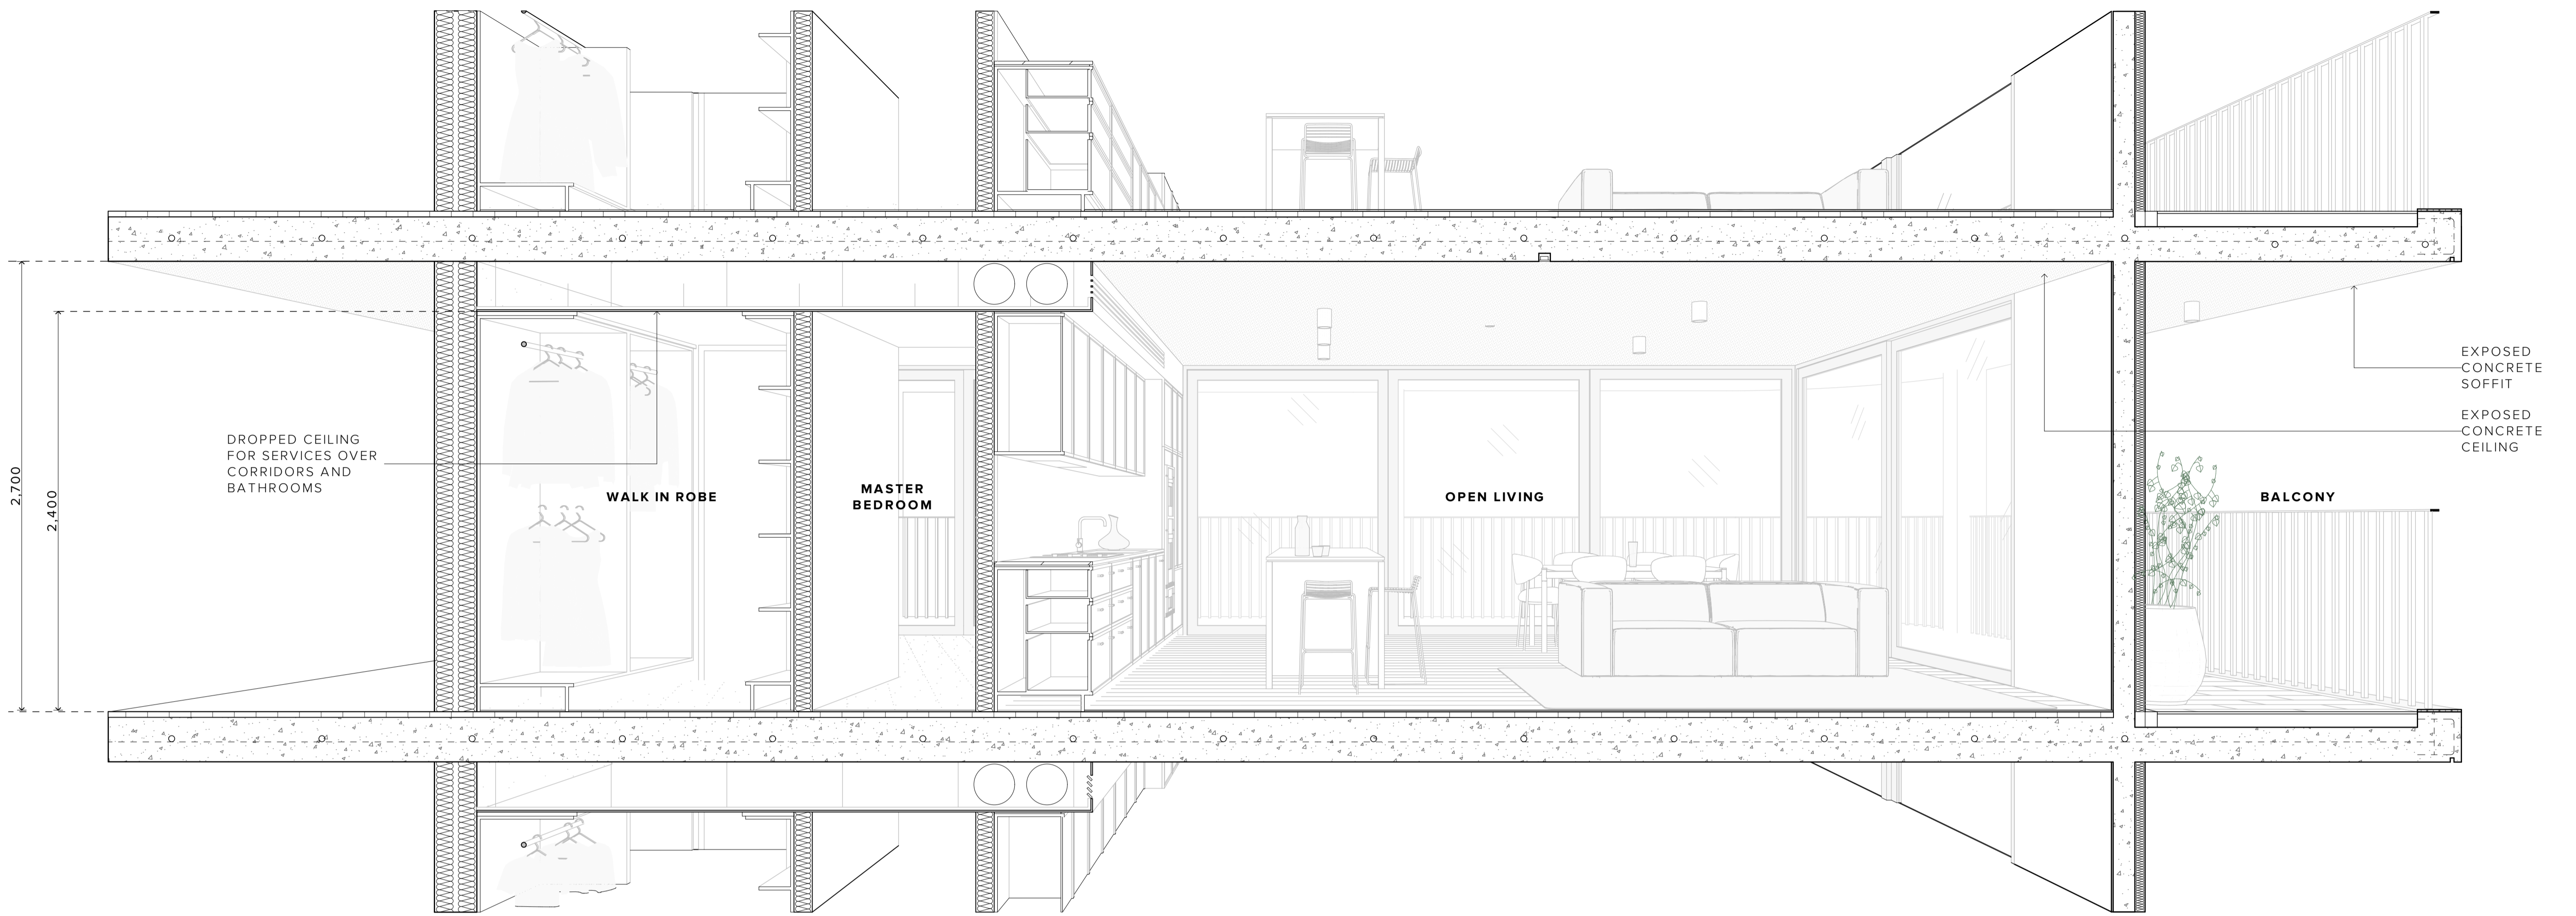

SECTION DETAIL (APT. 2B_3)

TYPICAL APARTMENT CEILING HEIGHT DIAGRAMS

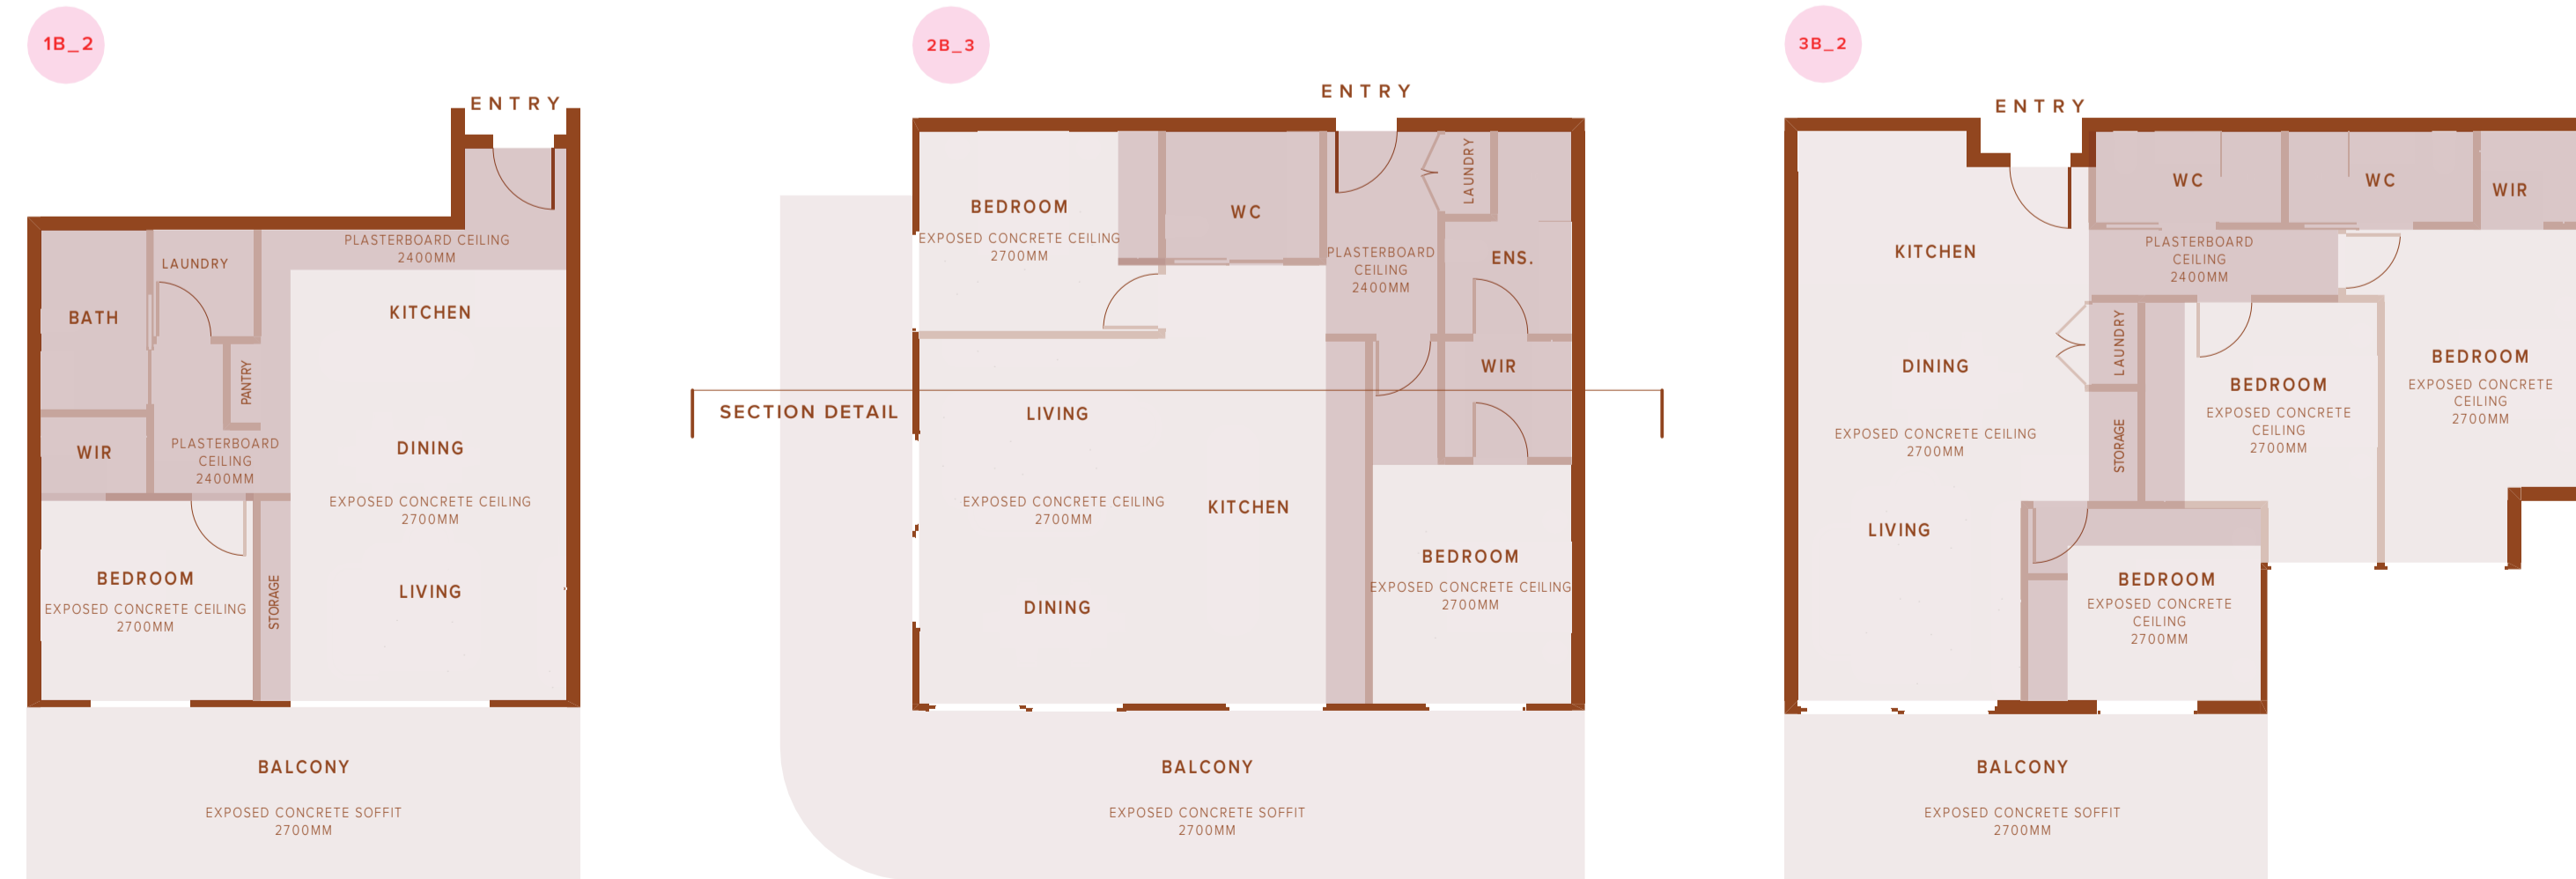



INTERIOR PRECEDENTS




EXPOSED CONCRETE CEILING WITH PLASTERBOARD BULKHEADS AND CEILINGS OVER CORRIDORS AND BATHROOMS

INSETS PROVIDED AT APARTMENT ENTRIES

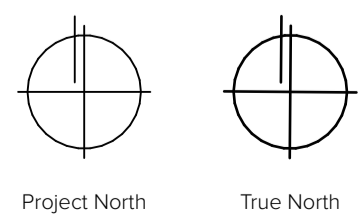


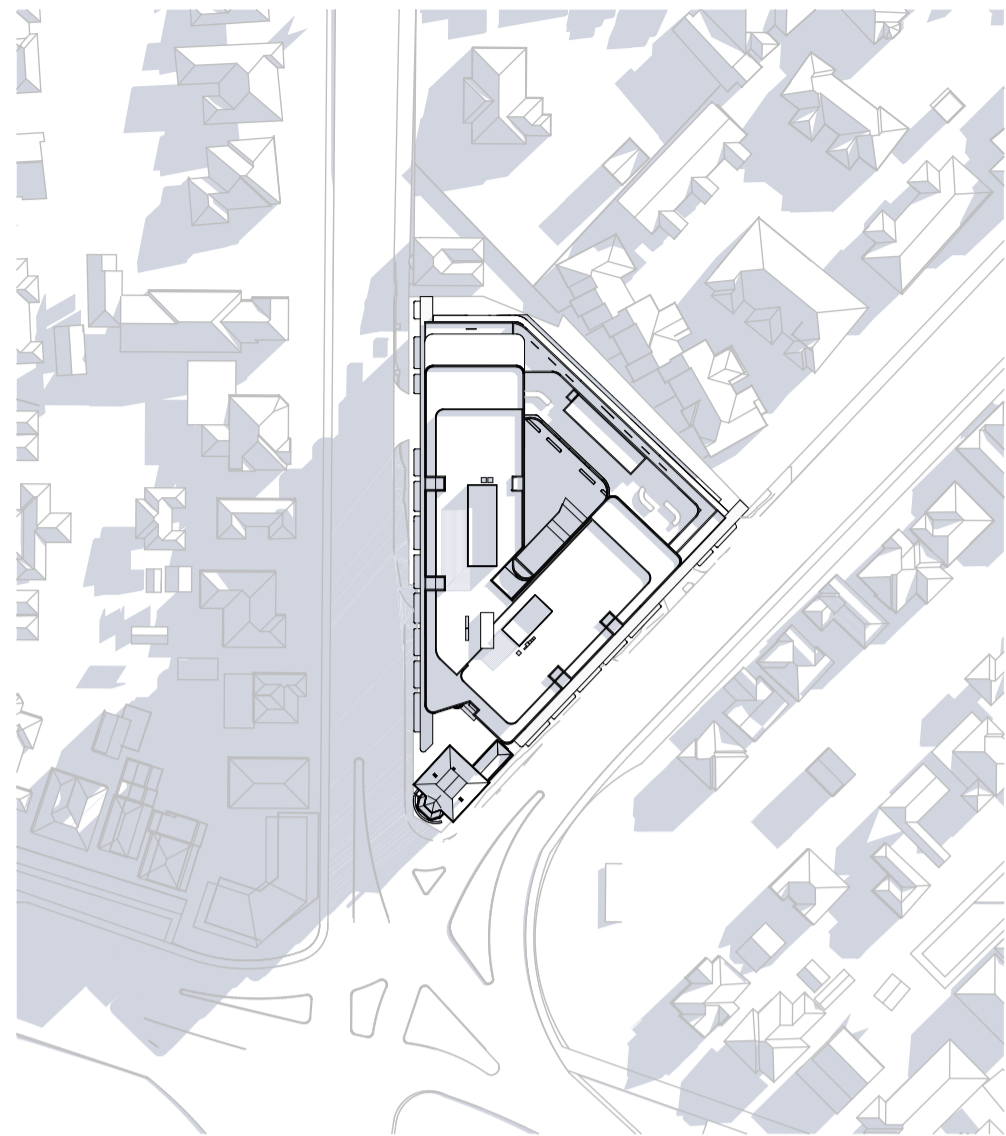


WINTER 9AM

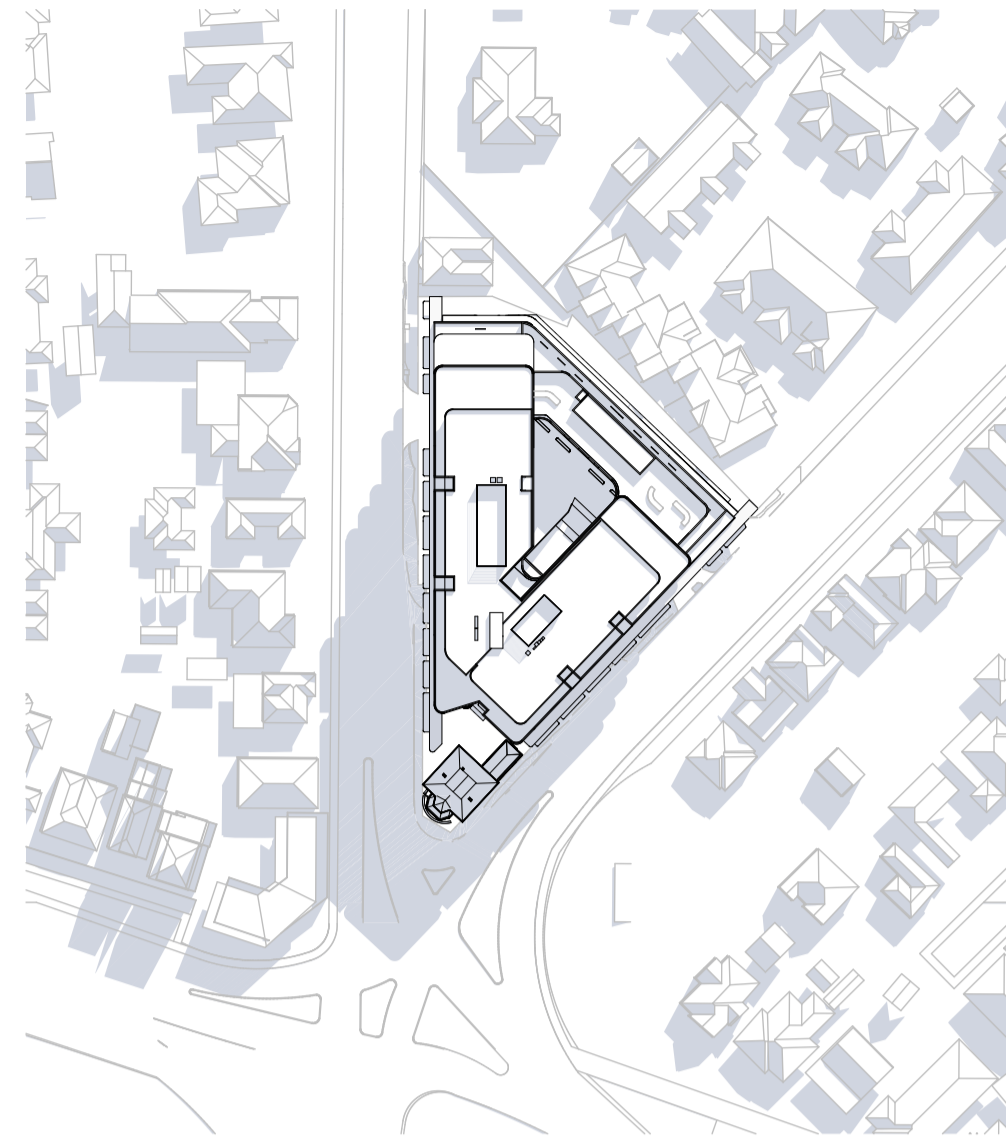


WINTER 10.30AM

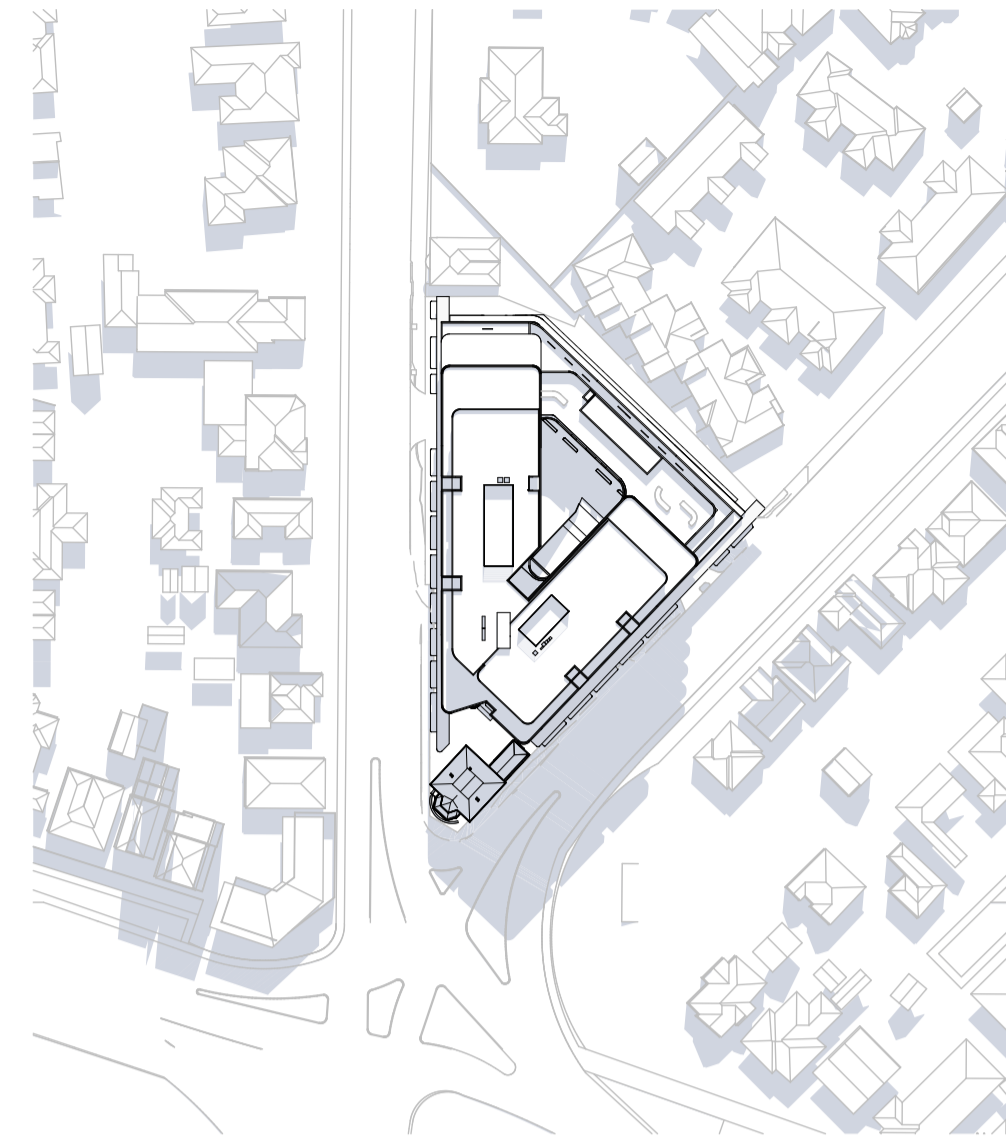


WINTER 12PM

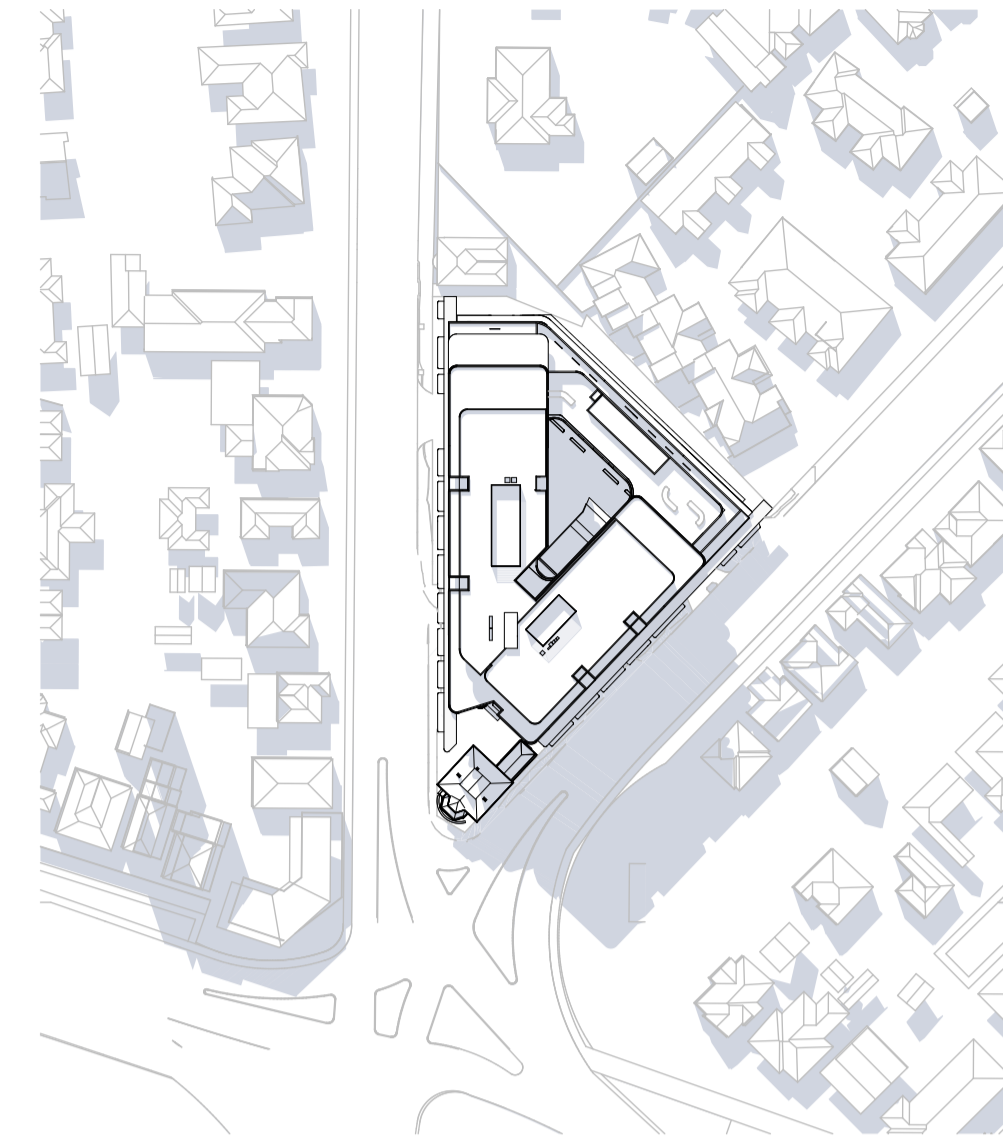


WINTER 1.30PM

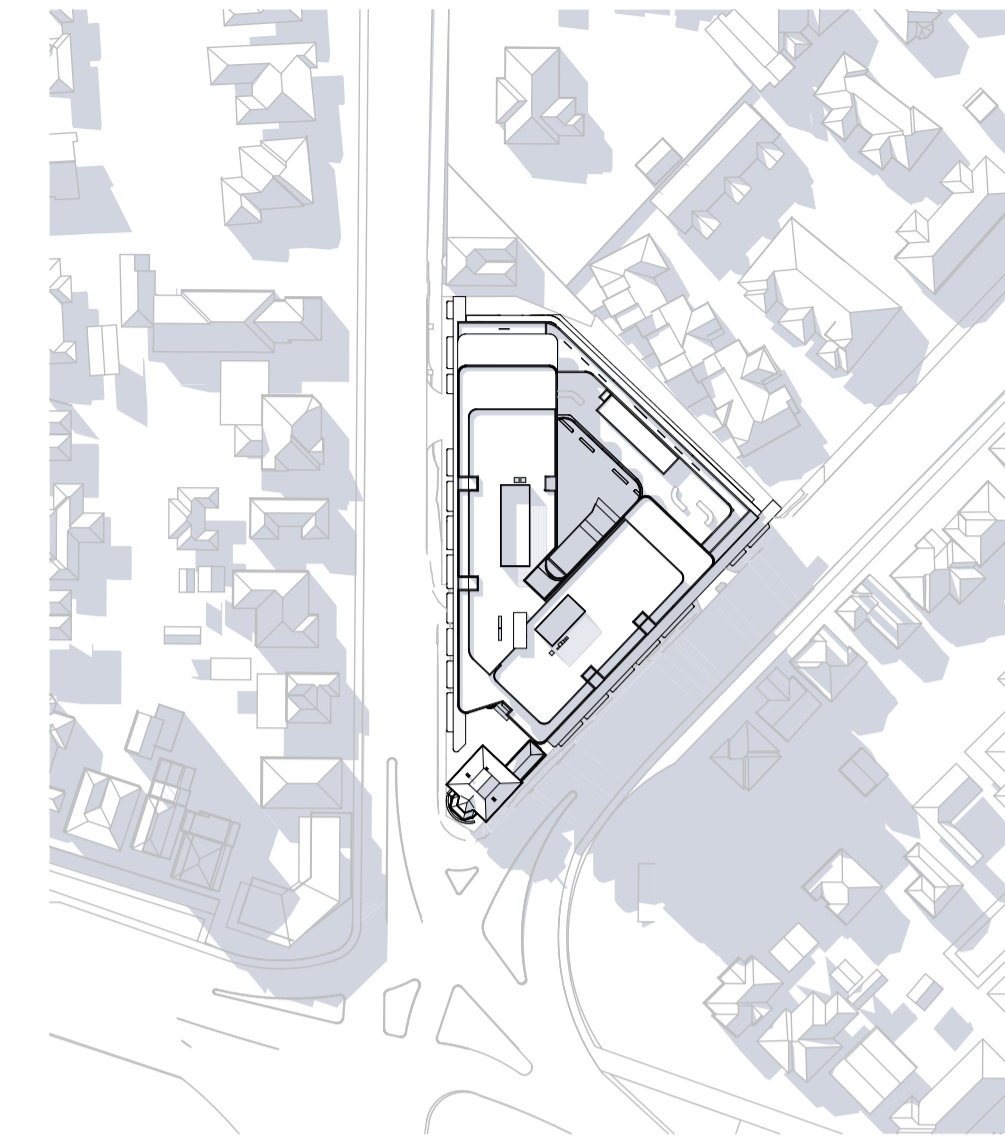


WINTER 3PM

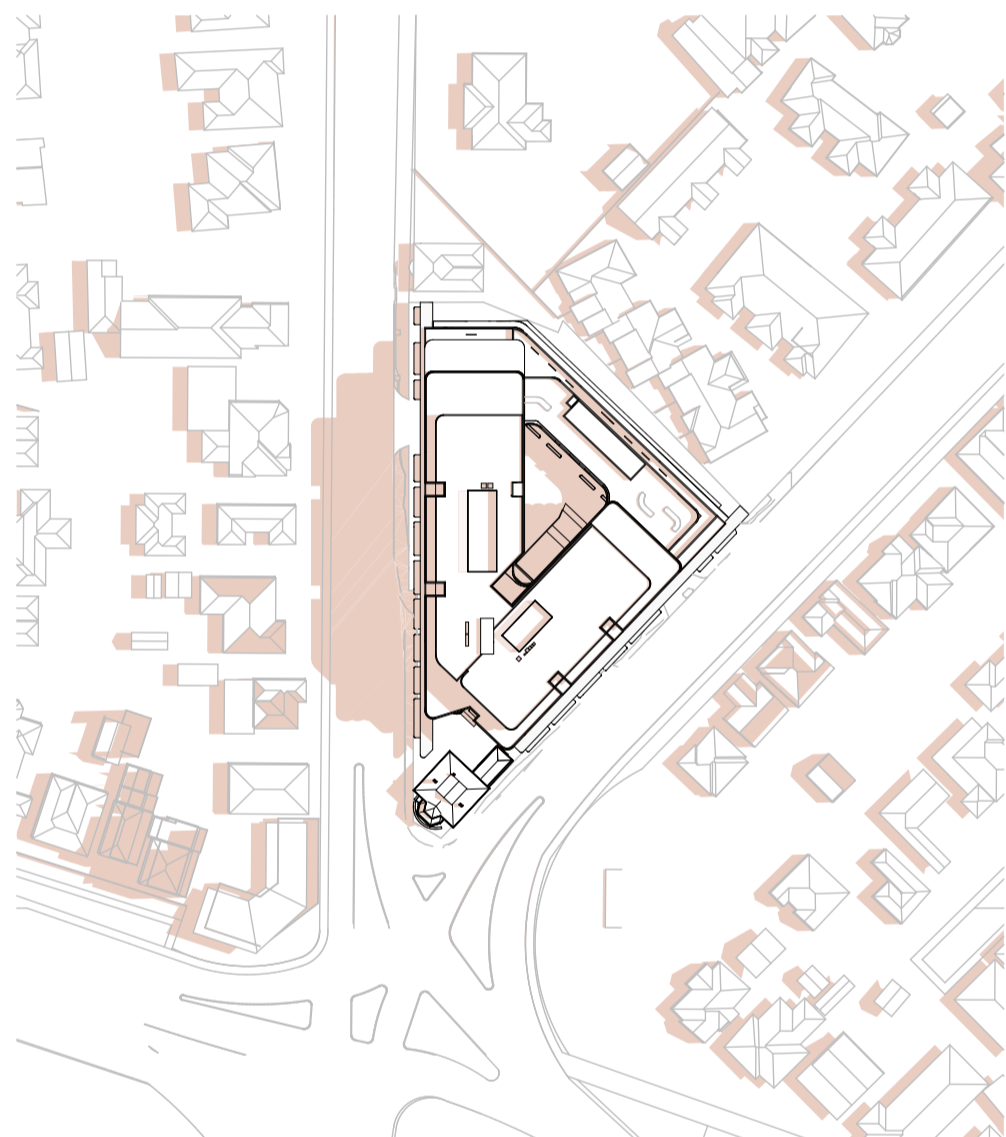


SUMMER 9AM

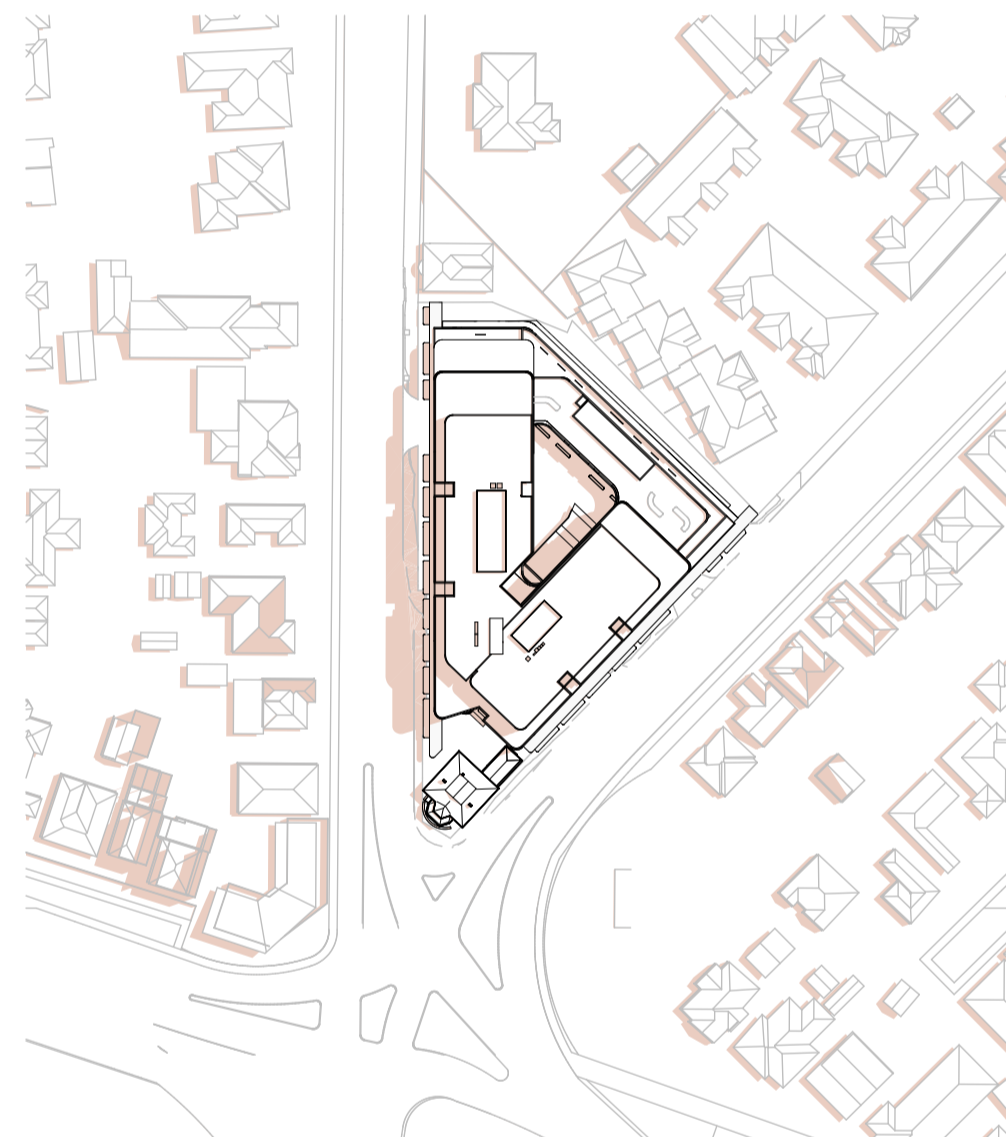


SUMMER 10.30AM

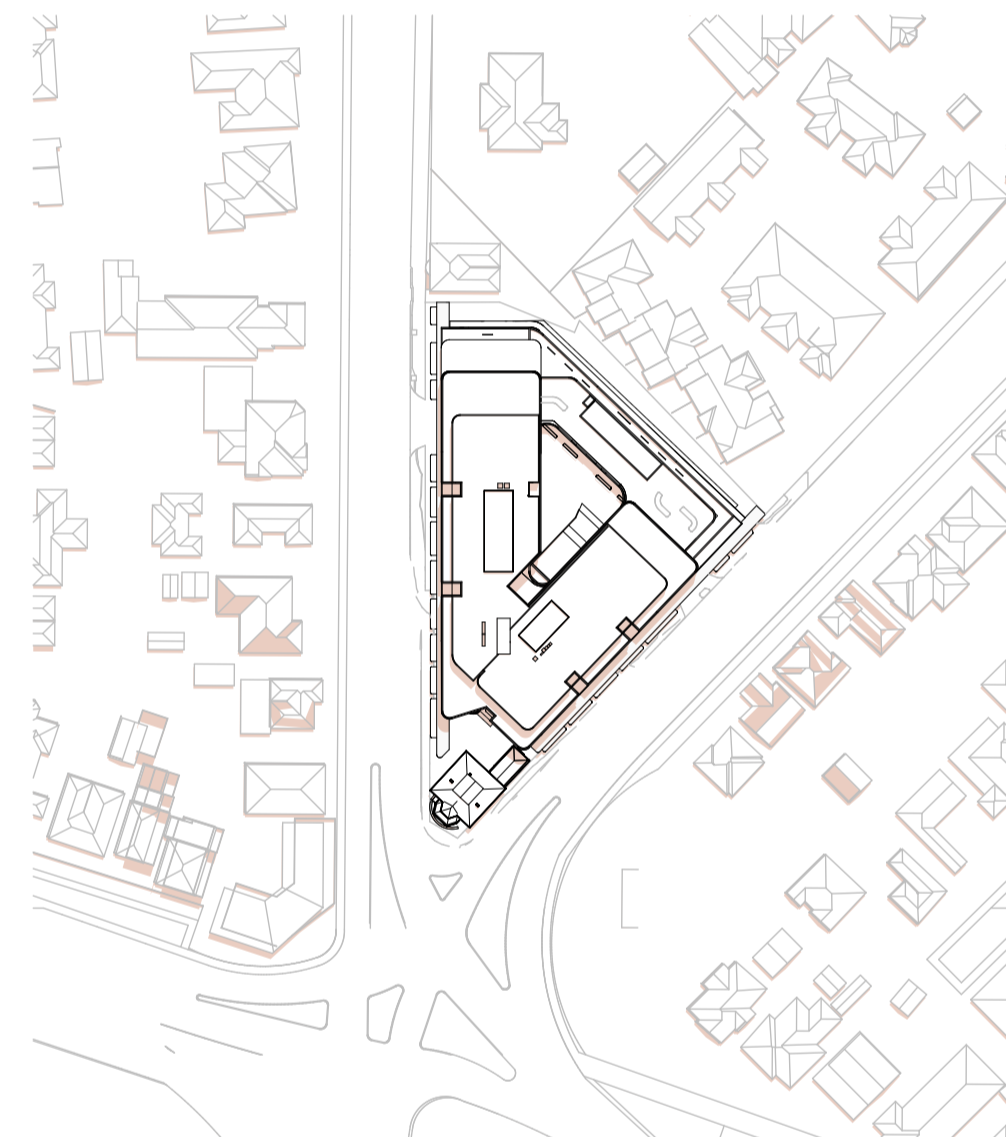


SUMMER 12PM

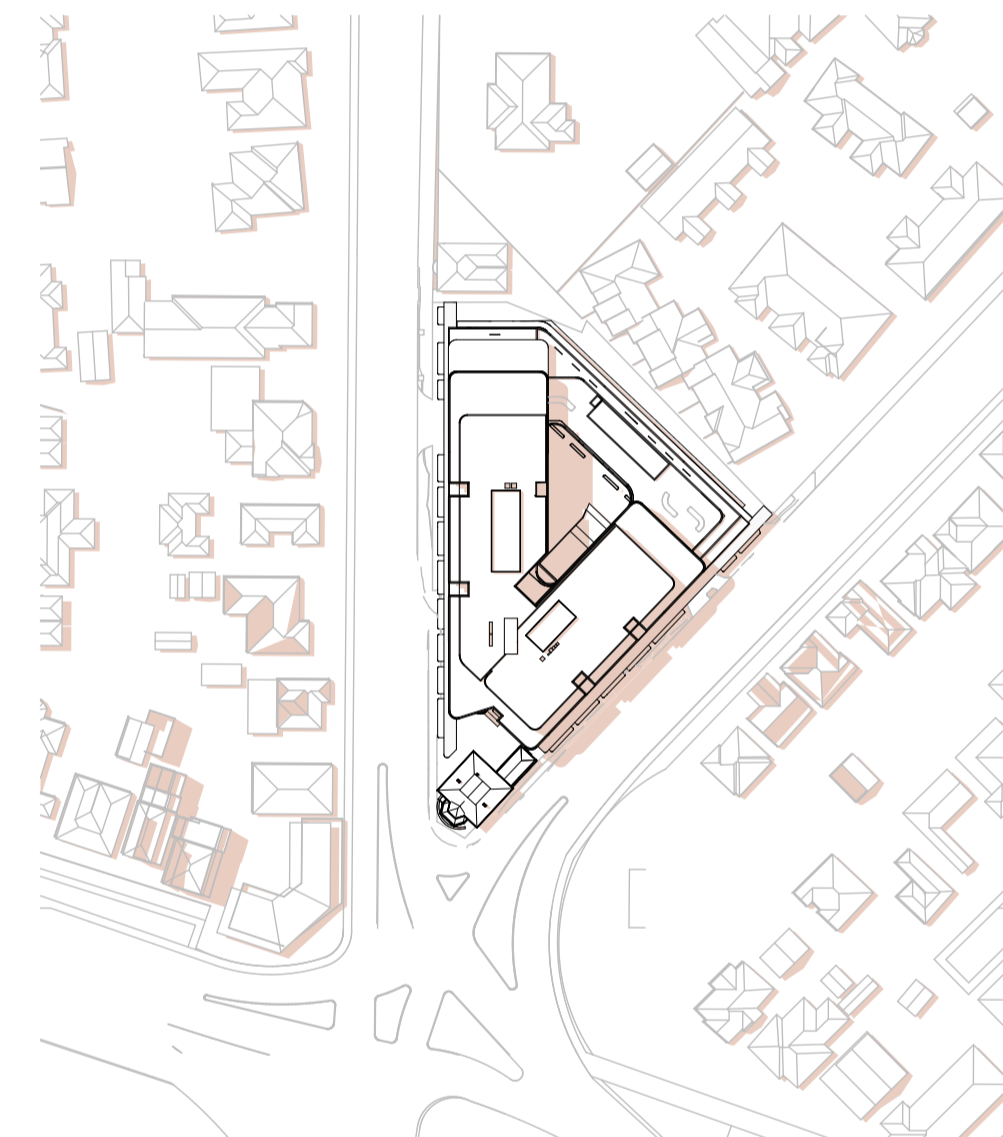


SUMMER 1.30PM

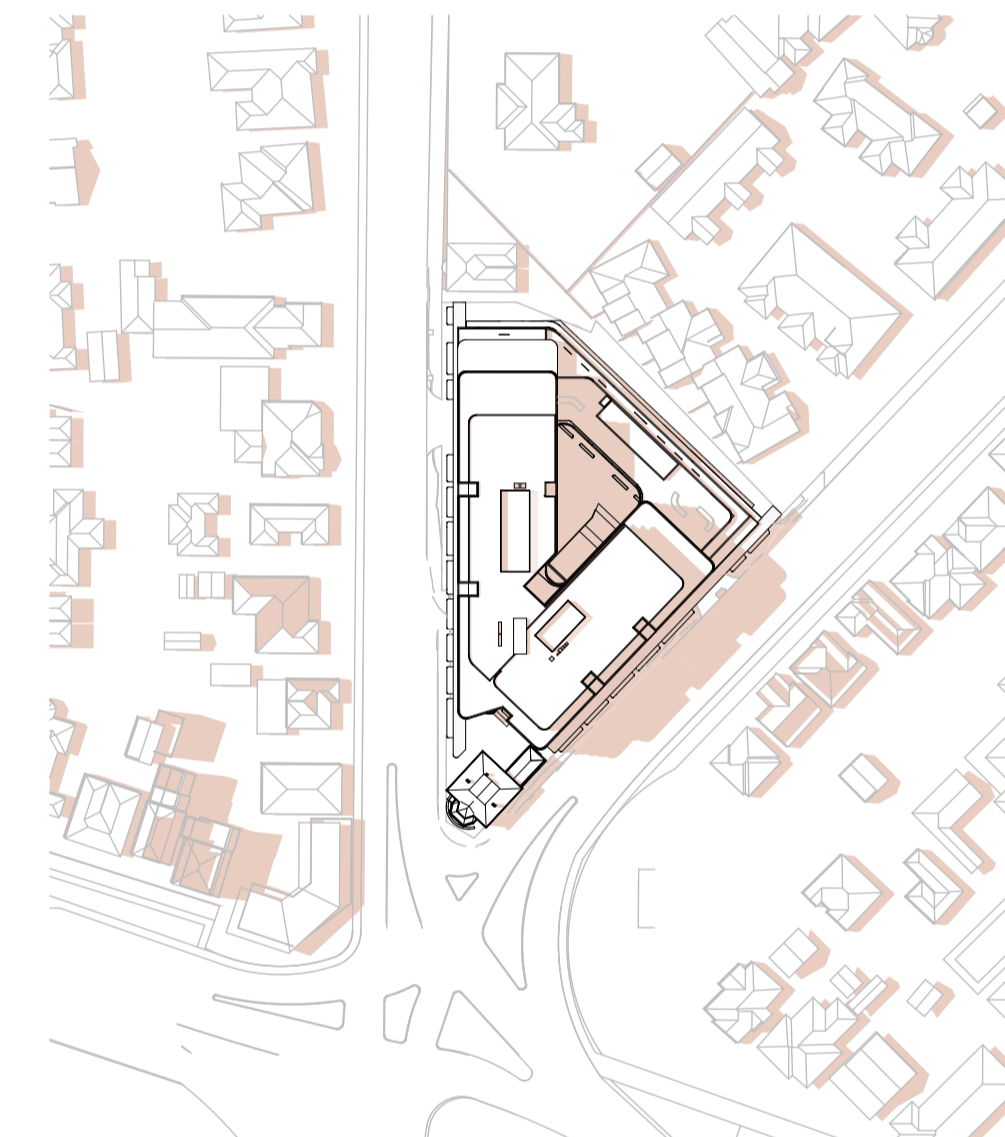

SUMMER 3PM

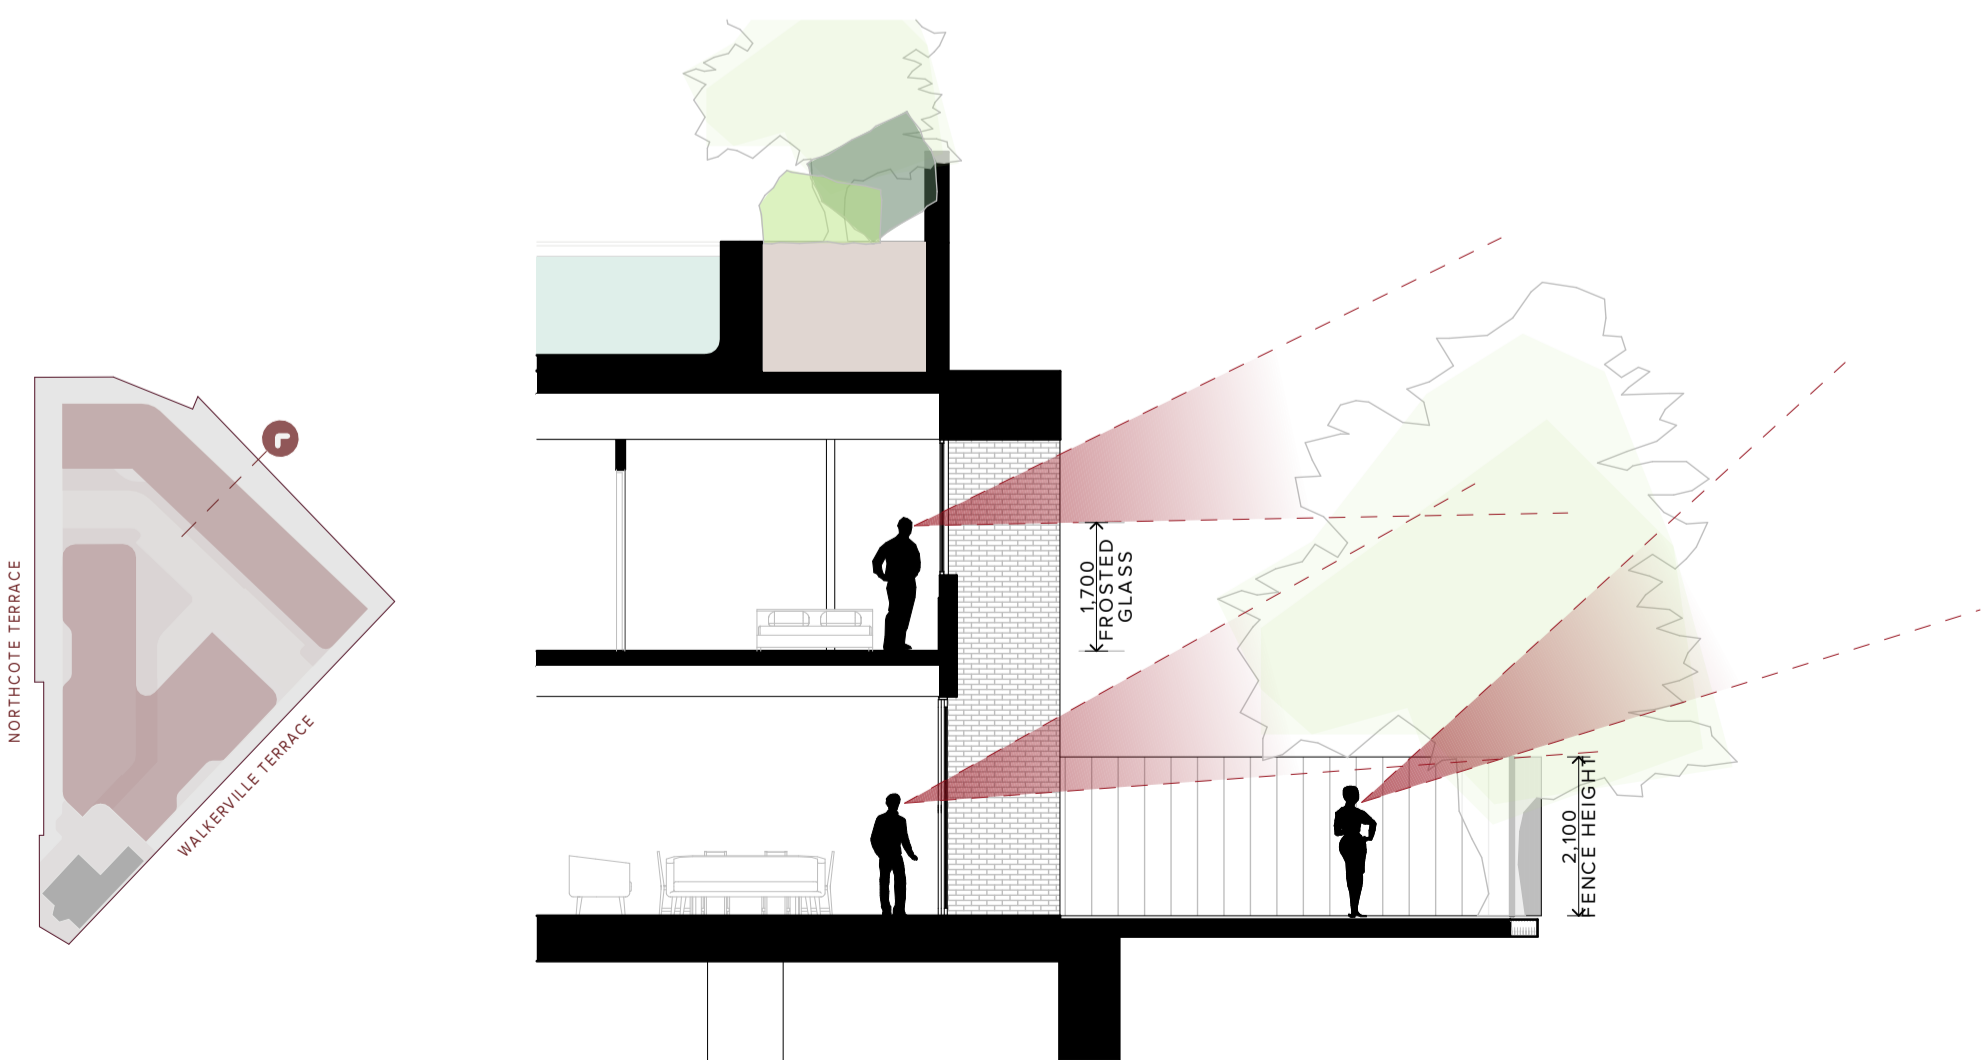

GROUND FLOOR APARTMENTS OVERLOOKING SECTION E

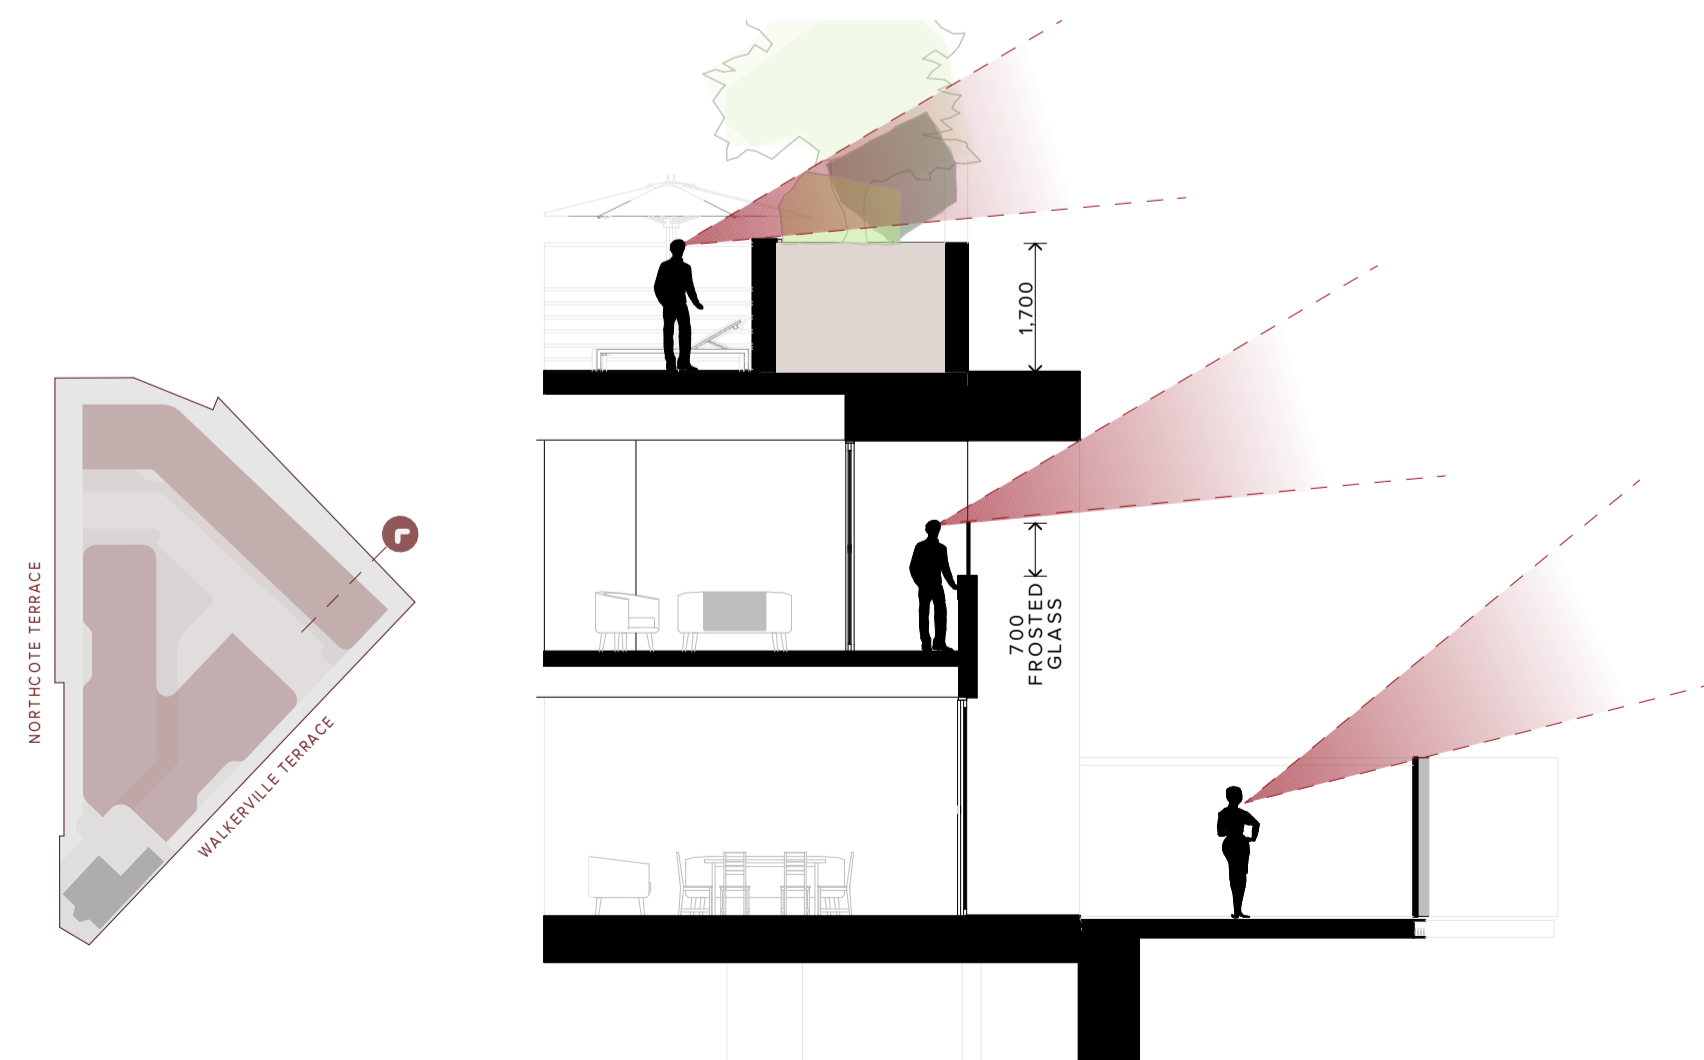


GROUND FLOOR APARTMENTS OVERLOOKING SECTION D

SERVICE APARTMENTS

SELECTION OF THE MORE COMMON APARTMENT LAYOUTS ONLY. FULL RANGE OF APARTMENT TYPES ARE ON THE RESPECTIVE FLOOR PLANS.

SA_1

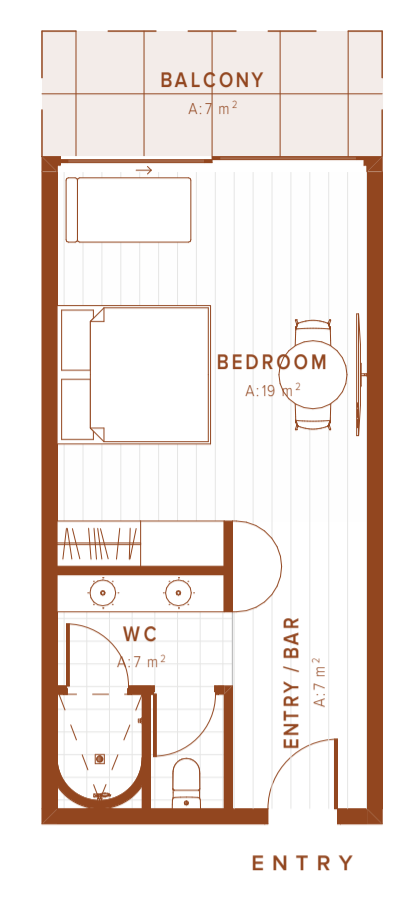


STUDIO (SERVICED ACCOMODATION) LEVELS 1 + 2

APARTMENT AREA : 38m²
P.O.S : 7m²
TOTAL : 45m²

1 BED APARTMENTS

1B_2

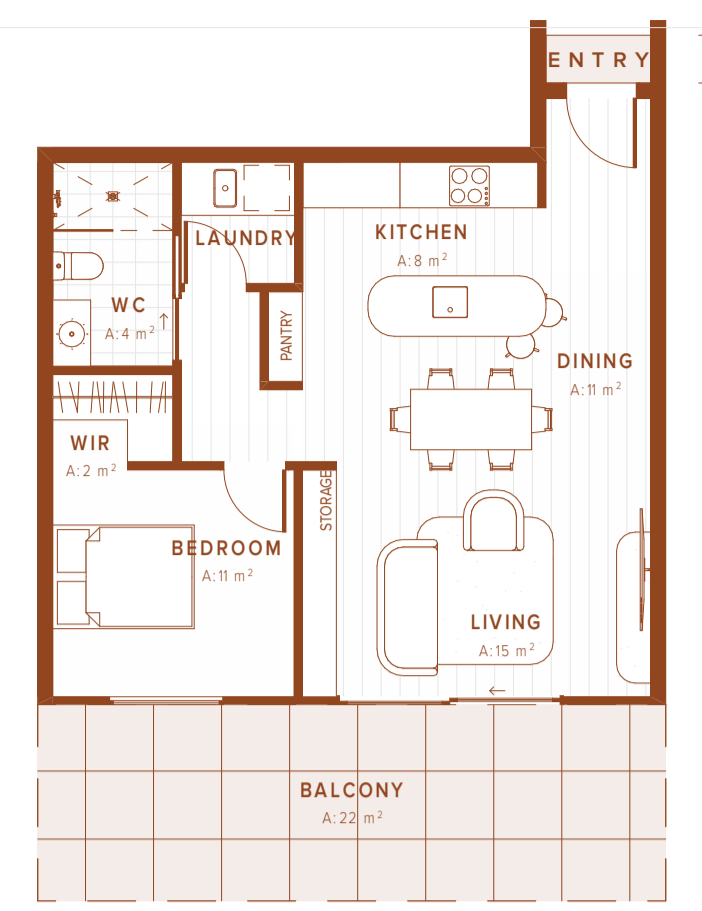

1 BED LEVELS 3 - 8

APARTMENT AREA : 60m²
P.O.S : 22m²
TOTAL : 82m²

NDIS APARTMENTS

NDIS_1



2 BED LEVELS 2 + 3

APARTMENT AREA : 100m²
P.O.S : 21m²
TOTAL : 121m²


STORAGE SCHEDULE

STORAGE SCHEDULE DONATES THE STORAGE VOLUMES IN EACH APARTMENT TYPE. APARTMENTS TYPES ARE NOTED ON THE FLOOR PLANS.

| APARTMENT TYPE CODE | VOLUME (m3) |
|------------------------------|-------------|
| 1 BED | |
| 1B_1 | 17.76 |
| 1B_2 | 9.82 |
| 1B_3 | 10.89 |
| 1B_4 | 13.85 |
| 1B_5 | 11.42 |
| 1 BED - 2 STOREY | |
| 2SA_4 | 14.57 |
| 2 BED | |
| 2B_1 | 14.59 |
| 2B_2 | 12.83 |
| 2B_3 | 17.28 |
| 2 BED (NDIS) | |
| 2B_4 | 14.55 |
| 2B_5 | 19.40 |
| 2B_6 | 12.66 |
| NDIS 1 | 11.95 |
| NDIS 2 | 15.60 |
| NDIS 3 | 14.27 |
| NDIS 5 | 19.71 |
| NDIS 6 | 12.90 |
| NDIS 7 | 13.51 |
| 2 BED - 2 STOREY | |
| 2SA_1 | 11.62 |
| 2SA_2 | 19.65 |
| 2SA_3 | 19.51 |
| 2SA_4 | 12.14 |
| 2.5 BED | |
| 2.5B_1 | 18.55 |
| 2.5B_2 | 17.29 |
| 2.5B_3 | 14.22 |
| 3 BED | |
| 3B_1 | 22.67 |
| 3B_10 | 25.28 |
| 3B_11 | 19.83 |
| 3B_12 | 24.11 |
| 3B_12.2 | 28.73 |
| 3B_13 | 17.55 |
| 3B_14 | 29.04 |
| 3B_15 | 26.56 |
| 3B_16 | 18.87 |
| 3B_2 | 14.10 |
| 3B_3 | 17.20 |
| 3B_4 | 21.42 |
| 3B_5 | 19.24 |
| 3B_6 | 14.87 |
| 3B_6.2 | 13.84 |
| 3B_7 | 55.49 |
| 3B_9 | 35.27 |
| 3B_9.2 | 26.52 |
| 4 BED | |
| 4B_1 | 30.36 |
| 4B_2 | 28.68 |
| 4B_2.2 | 32.03 |
| 4B_3 | 27.36 |
| 4B_4.2 | 29.34 |
| 4B_5 | 53.53 |
| SERVICED ACCOMODATION | |
| SA_1 | 4.73 |
| SA_A.2 | 7.14 |
| SA_ACCESS_1 | 8.05 |
| SA_ACCESS_2 | 3.85 |
| SA_ACCESS_3 | 3.70 |
| SA_B | 5.68 |
| SA_B.2 | 6.27 |
| SA_C | 4.86 |
| SA_D | 4.93 |
| SA_E | 4.17 |
| SA_F | 4.23 |
| SA_G | 5.36 |
| SA_H | 5.42 |

2 BED APARTMENTS


2B_3

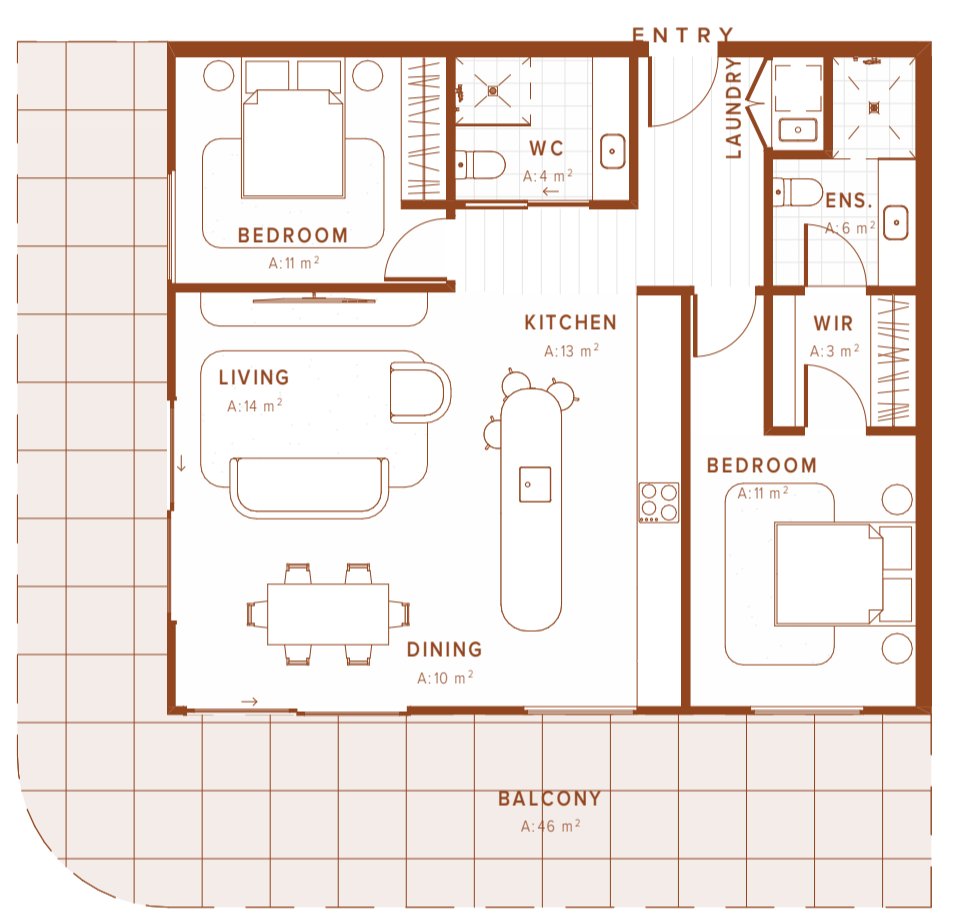

2 BED LEVELS 3 - 6

APARTMENT AREA : 88m²
P.O.S : 46m²
TOTAL : 134m²

2SA_1

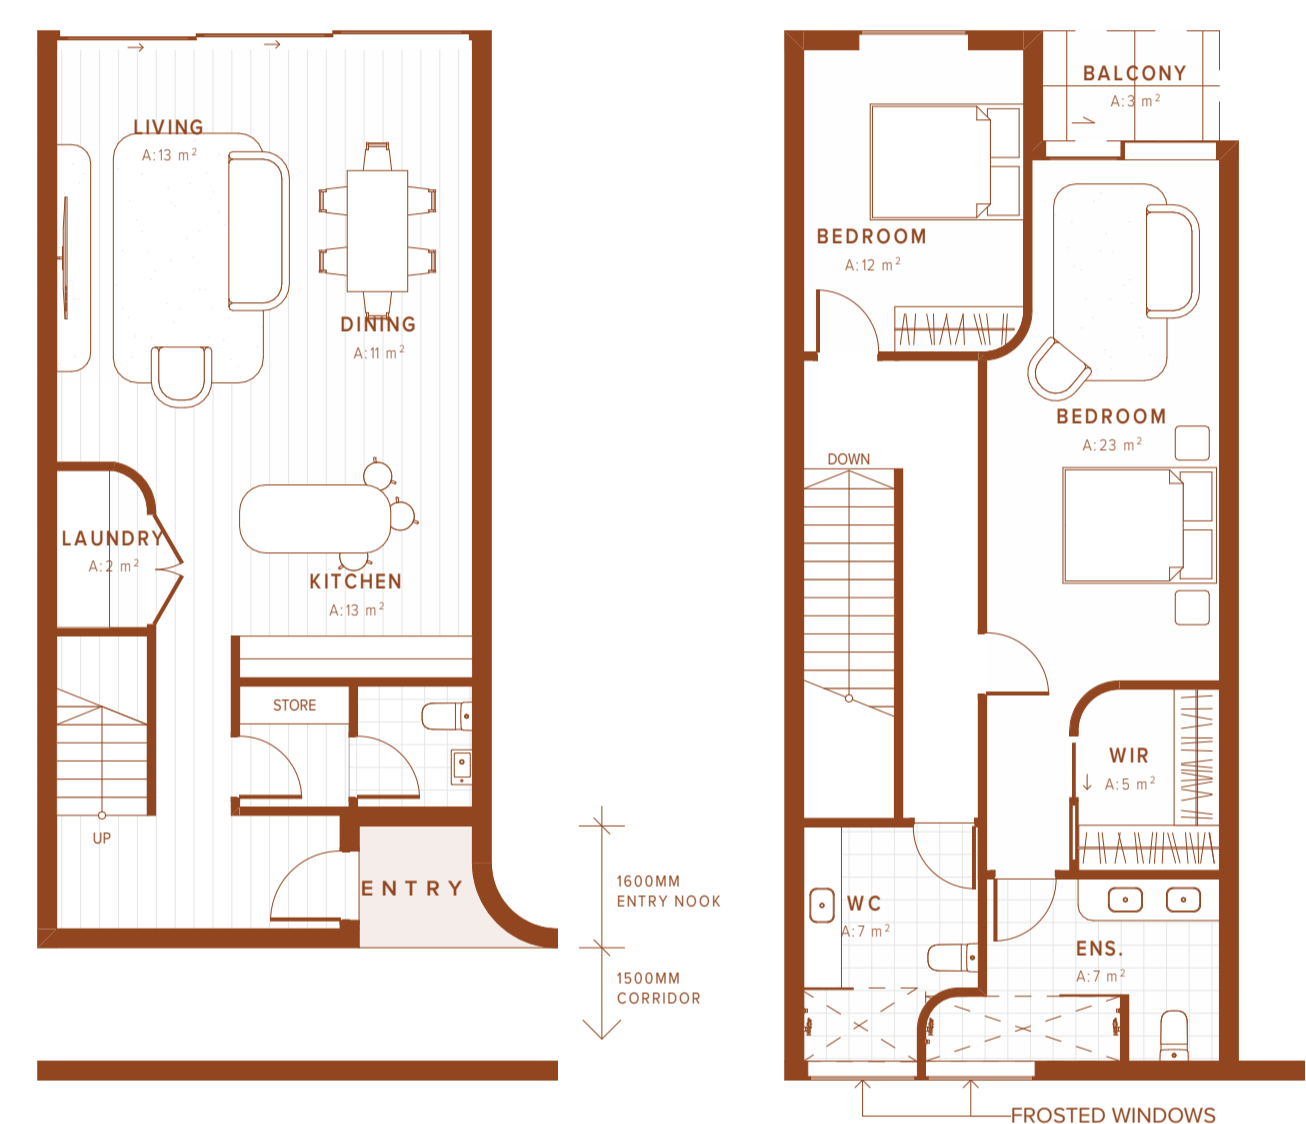


2 BED (2 STOREY) GROUND

APARTMENT AREA : 149m²
P.O.S : REFER FLOOR PLANS

4 BED APARTMENTS

4B_3

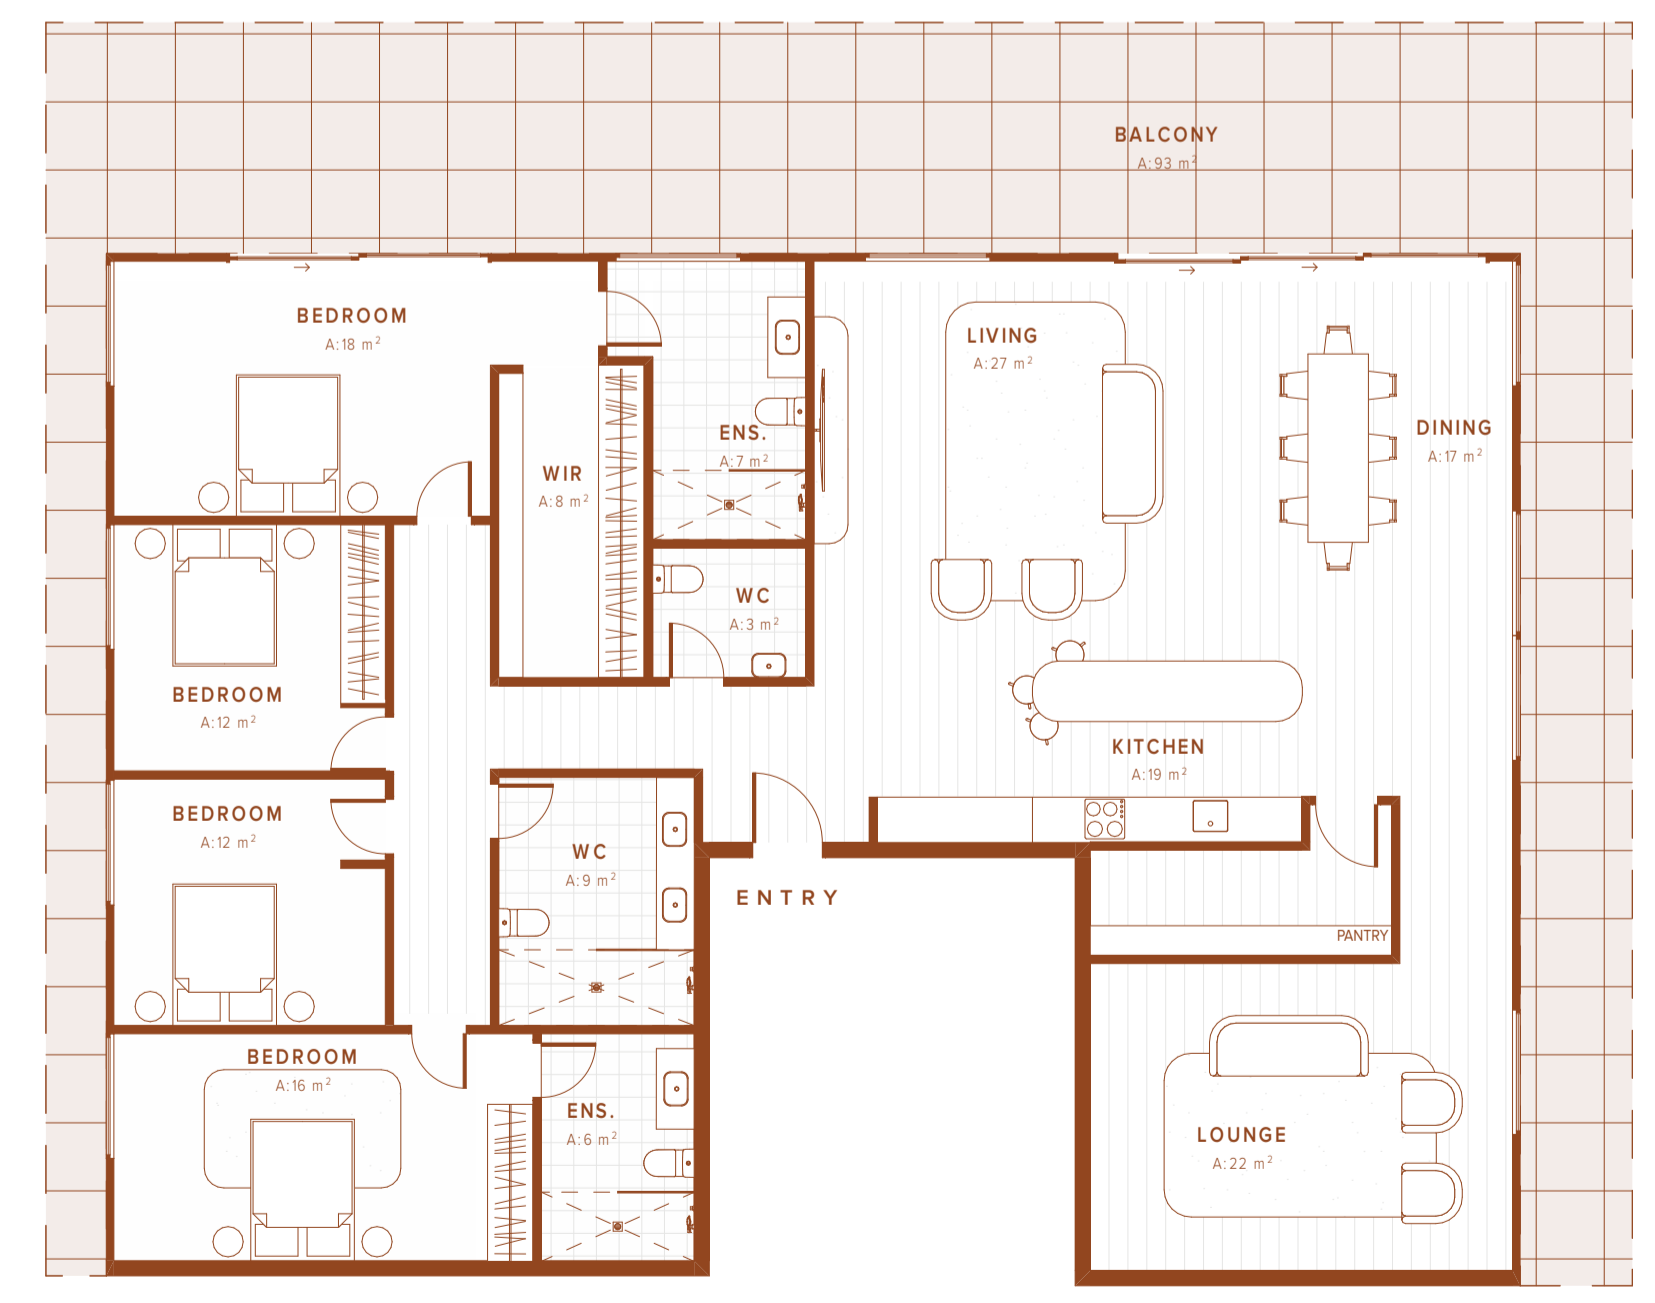


4 BED LEVELS 9

APARTMENT AREA : 225m²
P.O.S : 93m²
TOTAL : 318m²


3 BED APARTMENTS


3B_2

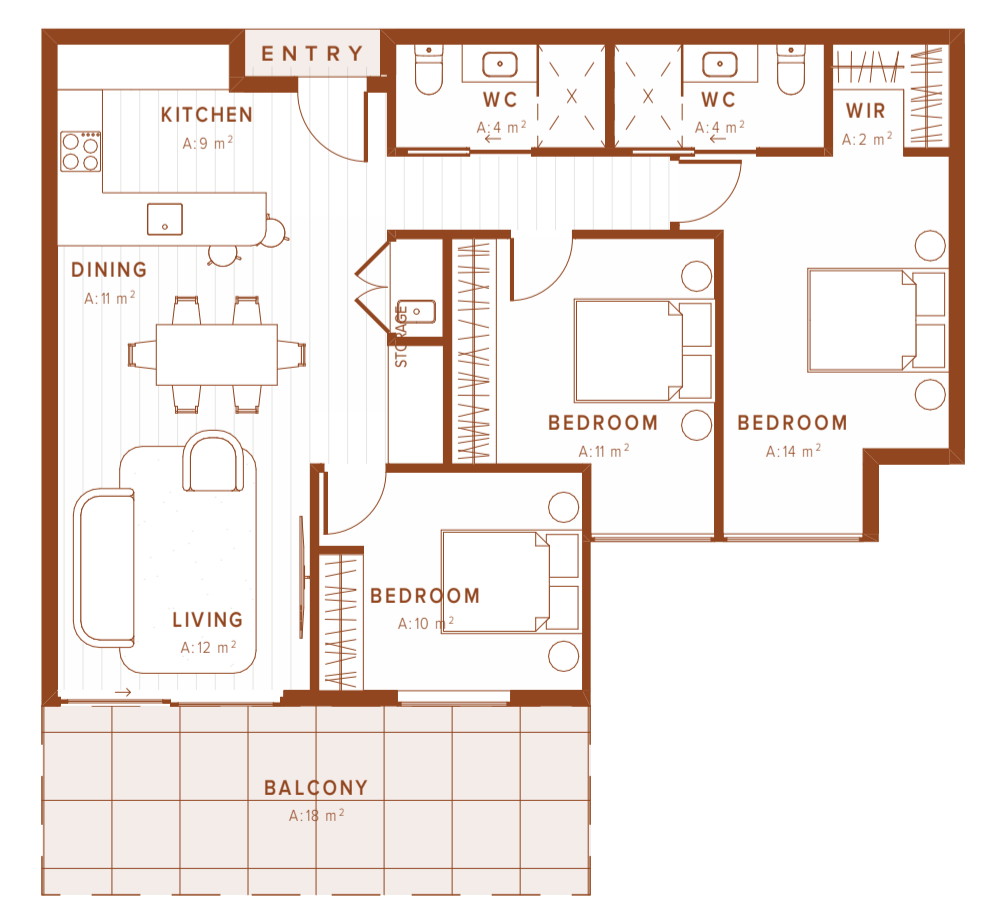

3 BED LEVELS 3 - 9

APARTMENT AREA : 96m²
P.O.S : 18m²
TOTAL : 114m²

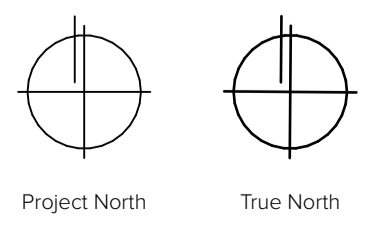

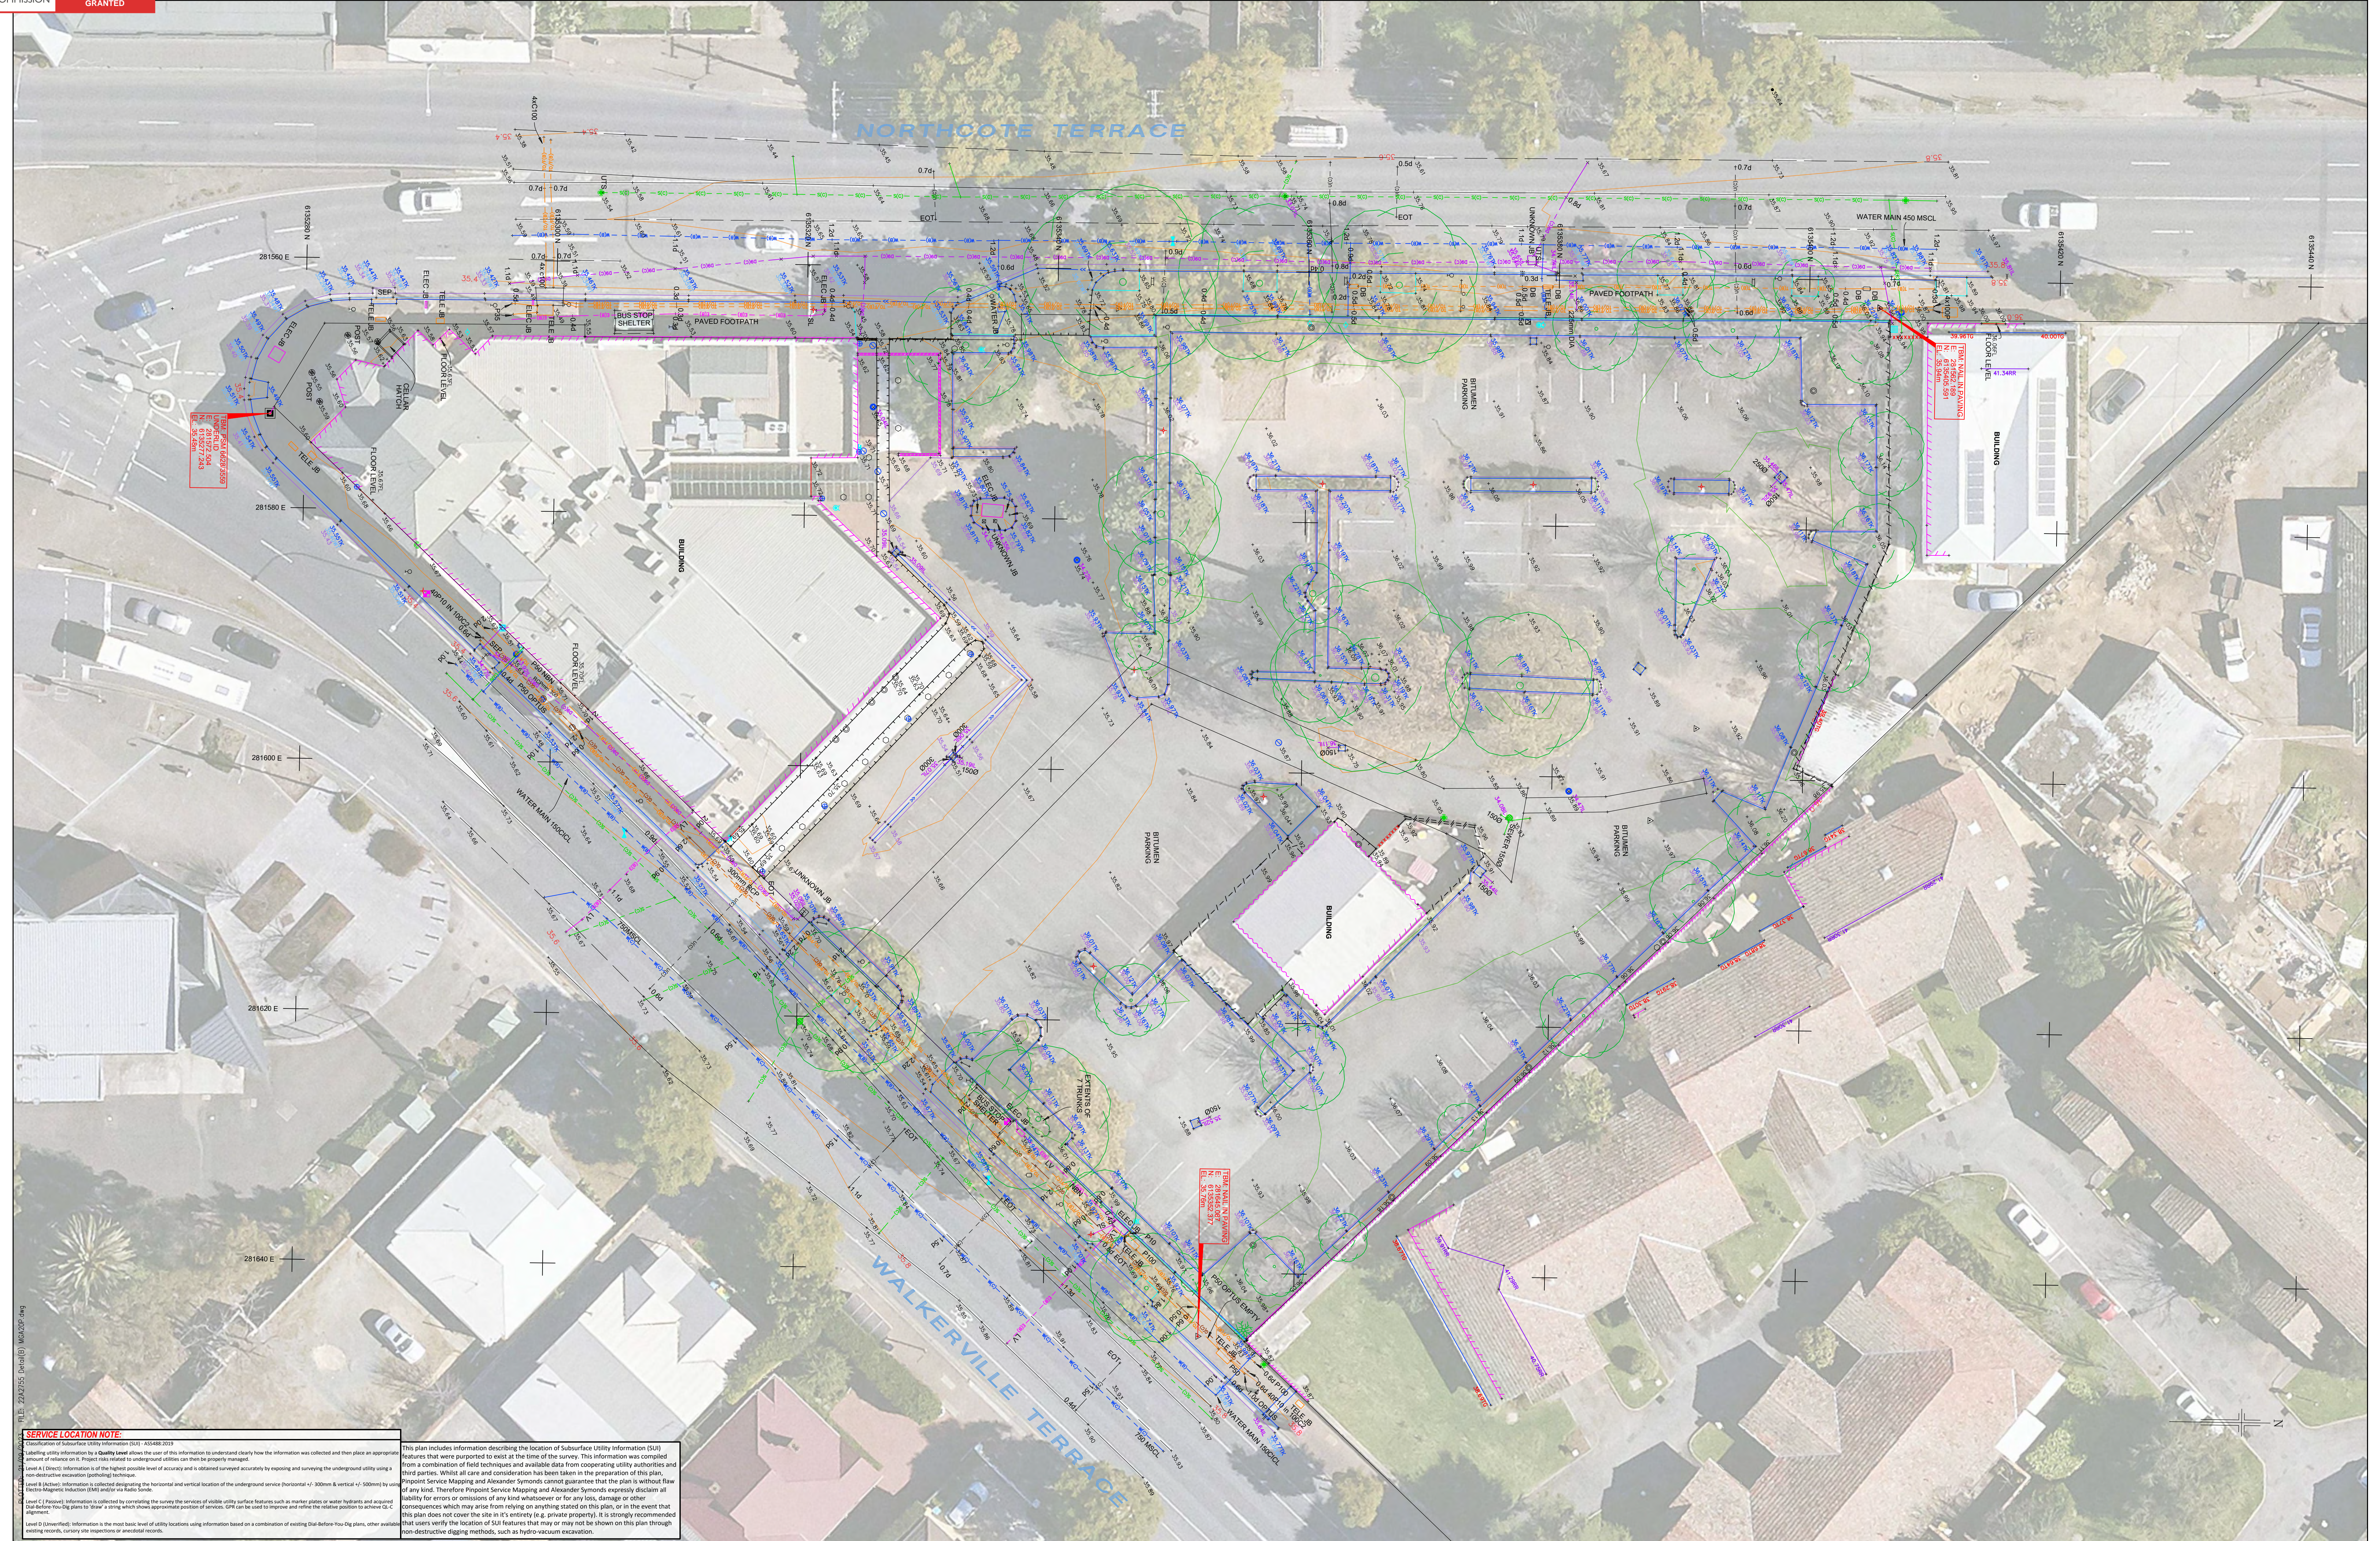

SERVICE LOCATION NOTE:
 This plan includes information describing the location of Subsurface Utility Information (SUI) features that were reported to exist at the time of the survey. This information was compiled from a combination of field techniques and available data from cooperating utility authorities and third parties. Whilst all care and consideration has been taken in the preparation of this plan, Pinpoint Service Mapping and Alexander Symonds cannot guarantee that the plan is without flaw of any kind. Therefore Pinpoint Service Mapping and Alexander Symonds expressly disclaim all liability for errors or omissions of any kind whatsoever or for any loss, damage or other consequences which may arise from relying on anything stated on this plan, or in the event that this plan does not cover the site in its entirety (e.g. private property). It is strongly recommended that users verify the location of SUI features that may or may not be shown on this plan through non-destructive digging methods, such as hydro-vacuum excavation.


LEGEND

| | | | |
|--------------------------------|-----------------------|-----------------------|-----------------------|
| 47.317N TOP KERB | 47.317N TOP OF GUTTER | 47.317N TOP OF GUTTER | 47.317N TOP OF GUTTER |
| 45.16FL FLOOR LEVEL | 47.240R ROOF RIDGE | 47.240R ROOF RIDGE | 47.240R ROOF RIDGE |
| 48.12N INVERT LEVEL | TEL COMM. PILLAR / PT | TEL COMM. PILLAR / PT | TEL COMM. PILLAR / PT |
| 48.12N TAP | TRAFIC LIGHT | TRAFIC LIGHT | TRAFIC LIGHT |
| 48.12N WATER METER | SIEN / BUS SIGN | SIEN / BUS SIGN | SIEN / BUS SIGN |
| 48.12N SPRINKLER / IRRIG VALVE | LITTER BIN | LITTER BIN | LITTER BIN |
| 48.12N HYDRANT | MAL BOX / SIGNAL BOX | MAL BOX / SIGNAL BOX | MAL BOX / SIGNAL BOX |
| 48.12N DOMESTIC OUTLET | TICKET MACHINE | TICKET MACHINE | TICKET MACHINE |
| 48.12N DOMESTIC | ROAD ELEC. SERVICE | ROAD ELEC. SERVICE | ROAD ELEC. SERVICE |
| 48.12N STORMWATER WHOLE | ELEC. GAS METER | ELEC. GAS METER | ELEC. GAS METER |
| 48.12N SEEP / GRATING | GAS SERVICE | GAS SERVICE | GAS SERVICE |

| | | | | |
|-------------------------------------|-------------------|-------------|------|-------|
| 15.11.2022 | INITIAL RELEASE | DG | DAS | |
| 08.03.2023 | UPDATE BOUNDARY | DG | DJH | |
| 20.09.2023 | ADDITIONAL DETAIL | DG | DJH | |
| REV | DATE | DESCRIPTION | CALC | FIELD |
| ADDITIONS, AMENDMENTS AND APPROVALS | | | | |

COORDINATE SYSTEM
 VERTICAL: AHD
 HORIZONTAL: GROUND PLANE ORIENTED
 TO: MGA 2020 ZONE 54
 SCALE: GROUND (CSF = 1.000181269)

ADOPTED STATION & AUTHORITY
 PSM 66283559 RL 35.475 SDB
 PSM 66283559 E 281572.504 SDB
 PSM 66283559 N 6135277.243 SDB
 SDB denotes SA Government survey data base values (Dated 10/02/2000)

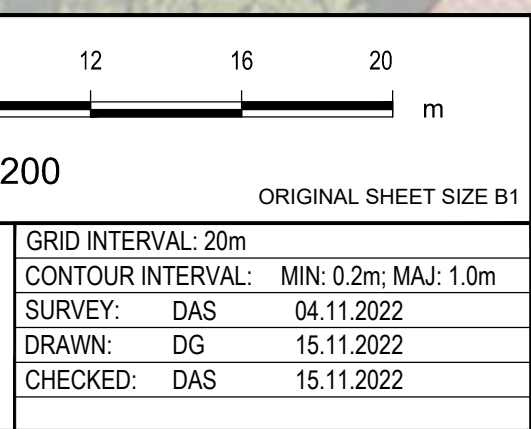

Alexander & Symonds Pty Ltd
 11 King William Street Kent Town,
 South Australia 5067
 PO Box 1000 Kent Town, SA 5071
 ASN 93007 733 988

T (08) 8130 1666
 F (08) 8362 0099
 W www.alexander.com.au
 E adelaide@alexander.com.au

+ Property + Land Development +
 + Construction + Mining +
 + Spatial Information Management +

Alexander Symonds
 Surveying Consultants

DETAIL & LEVEL SURVEY
1-9 WALKERVILLE TERRACE
GILBERTON

DRAWING No. 22A2755 Detail(B) MGA20P SHEET 1 OF 1 REVISION B

Table 1 – Development yield comparison

| Use | Former Yield | Current Yield | Yield Difference |
|---------------------|----------------------|----------------------|-----------------------|
| Terrace Apartments | 11 | 14 | +3 |
| Apartments | 168 | 116 | -52 |
| Serviced Apartments | 14 | 57 | +43 |
| Non-Residential | 3,522 m ² | 1,460 m ² | -2,062 m ² |

As illustrated in Table 1, the site’s subject development yield has dropped notably with both its non-residential and standard apartment yields. Whilst the terrace apartment yield remains comparable to that of the previous townhouse yield, when considering the product type (i.e. previously all 11 townhouses were three bedroom, whereas the subject development comprises only one three-bedroom terrace apartment), it is considered that there is negligible difference.

Furthermore, whilst the quantity of serviced apartments has increased, this component of the development represents a small portion of the overall parking requirements (see Section 4.1) and traffic generation (see Section 5.1). On balance, the subject development represents a reduction in the intensity of the site’s development in both traffic and parking aspects.

3.2 PARKING AREA & DESIGN

The proposed development will be serviced by a total of 246 parking spaces, provided across two (2) basement parking levels and at-grade. Specifically, parking will be provided as follows:

- **Ground Level** - 3 short-term parking spaces for use for set-down/pick-up movements (i.e. passenger loading/unloading) and trades (requiring additional clearance for vans etc.);
- **Basement Level 1** – 116 spaces for use by retail/‘food and beverage’ tenancies (both staff and customers), service apartment guests and visitors associated the residential terraces and apartments); and
- **Basement Level 2** – 127 spaces for use by residents.

Further detail with regard to the minimum requirement for each use within the site is specified in Section 4.1.

A vehicular control point will be installed within Basement Level 1 (in the form of a roller door), with activation possible via remote control, RFID sensor, number plate recognition or similar. The roller door will be coupled with a fence to further prevent unrestricted pedestrian access between the residential and

non-residential areas. This will enable the residential parking area to be secured at all times (i.e. the door will remain closed) with a portion also available for visitor/public parking.

A second vehicular control point will be installed on the vehicle ramp between Ground Level and Basement Level 1 (also anticipated to be in the form of a roller door). This door will be open between the hours of 6:30 am and 12:00 midnight, enabling unrestricted access for site users. Outside of these periods (i.e. between 12:00 midnight and 6:30 am), the door will remain closed in line with typical Crime Prevention Through Environmental Design (CPTED) measures. Should residents wish to access the parking area during these times, the same security control mechanism will activate the door. In the event that visitors wish to access the site, residents will be able to open the roller door via intercom control from their apartment. Egress movements will simply activate the door via an in-ground induction loop within the egress travel path.

The parking areas shall comply with the requirements of the Australian/New Zealand Standards for "Parking Facilities – Part 1: Off-street car parking" (AS/NZS 2890.1:2004) and "Parking Facilities – Part 6: Off-street Parking for People with Disabilities" (AS/NZS 2890.6:2009) in that:

- regular parking spaces shall be 2.5 m wide and 5.4 m long;
- disabled parking spaces shall be 2.4 m wide and 5.4 m long (with an adjacent shared space of the same dimension);
- parking aisles shall be at least 5.8 m wide (in excess of 6.2 m wide adjacent customer parking spaces);
- 1.0 m end-of-aisle extensions shall be provided beyond the last parking space in a parking aisle;
- columns shall be located outside of the car clearance envelope;
- 0.3 m clearance shall be provided (where applicable) to all objects greater than 0.15 m in height;
- a head-height of at least 2.2 m shall be provided; and
- ramps shall have a maximum gradient of no steeper than 1 in 5, with transitions of at least 2 m at a gradient of 1 in 8.

The basement access ramps have been designed to facilitate simultaneous B99 design vehicle movements along their length. Similarly, simultaneous B99 design vehicle movements will also be facilitated at the site's internal intersection.

With regard to bicycle parking, a total of 190 bicycle spaces will be provided throughout the proposed development. Specifically, 132 spaces will be provided

within a secure bicycle room located within Basement Level 2 (for residents), and 10 bicycle spaces provided within a secure bicycle room at-grade (for use by staff). These spaces will be allocated to residents and staff within the proposed development. A further 24 bicycle rails (inclusive of 2 dedicated for cargo bicycle rail) will be located at-grade throughout the site, with each rail able to facilitate bicycle storage on both sides (i.e. 48 at-grade bicycle parking spaces). The bicycle parking shall be installed in line with the requirements of the Australian Standard for "Parking facilities – Part 3: Bicycle parking" (AS 2890.3:2015).

3.3 SITE ACCESS

Vehicle access to the site is proposed via the following access points:

- **a left-in/left-out access on Northcote Terrace.** The access will be restricted via a raised concrete splitter island, with ingress and egress approaches angled at 70-degrees to the adjacent Northcote Terrace roadway. The concrete splitter island will also comprise a pedestrian refuge (cut-out) to provide a storage area for pedestrians utilising the adjacent footpath (when crossing over the access point). Associated signage and linemarking will also be installed to further reinforce the access restrictions; and
- **a left-in/right-in/left-out access on Walkerville Terrace.** The access will also be restricted via a raised concrete splitter island, with the egress angled at 70-degrees to the adjacent Walkerville Terrace roadway. The splitter island will also comprise a pedestrian refuge (cut-out). Associated signage and linemarking will be installed to reinforce the left-out only movement.

It should be highlighted that both access points have been located such as to maximise separation from the adjacent Robe Terrace/Northcote Terrace/Walkerville Terrace/Park Road intersection (whilst maintaining a functional site design). Of note, the former Buckingham Arms Hotel was serviced by three access points on Walkerville Terrace, and one access point on Northcote Terrace, all located within closer proximity to the adjacent intersection than that of the proposed development's access points. The increased separation will therefore minimise traffic impacts to the signalised intersection in comparison to that of the existing site's operation.

Whilst the Walkerville Terrace access is located adjacent a merge treatment on the departure side of the intersection, it is not considered that this will create undue safety implications. This is due to the Australian Road Rules requiring a driver exiting from a private property to Give Way to all vehicles on the adjacent public road network. The Road Rules therefore regulate these movements to ensure that the safe operation of the road network is maintained at all times.

All existing crossovers will be closed and reinstated as Council-standard upright kerb. The new access points have been designed to facilitate simultaneous B99 vehicle turning movements as well as commercial vehicles associated with site servicing (see Section 3.4). Pedestrian sightline provisions have been accommodated at the proposed access points in accordance with Figure 3.3 of AS/NZS 2890.1:2004.

Plans illustrating the various B99 design vehicle turn paths to, from and throughout the site are attached in Appendix B.

Pedestrian and cyclist access to the site will be provided via the site's frontages to Northcote Terrace and Walkerville Terrace. Bicycle storage/parking areas are provided at-grade throughout the site, as well as within the basement levels (for residents and staff), which will be able to be accessed via service lifts. All bicycle parking shall comply with the requirements of the Australian Standard for "Parking Facilities – Part 3: Bicycle Parking" (AS 2890.3:2015).

3.4 SERVICE VEHICLE MOVEMENT

Refuse collection and site servicing is proposed to occur on-site in a designated loading bay, accessed from the common roadway. The site has been designed to accommodate commercial vehicles up to 10 m in length. Such vehicles will be able to enter and exit the site in a forward direction from both the site's Northcote Terrace and Walkerville Terrace intersections.

A head height of at least 3.8 m shall be provided above all areas where commercial vehicle movements will occur. A plan illustrating commercial vehicle movements to, from and within the site is attached in Appendix C.

4. PARKING ASSESSMENT

4.1 CAR PARKING

The Planning and Design Code identifies the following parking requirements relevant to the proposed development, noting the site's location within a designated area:

- **Non-residential development**
 - 3 parking spaces per 100 m² gross leasable floor area;
- **Tourist accommodation** (*applicable to serviced apartments*)
 - 1 space for every 4 bedrooms;
- **Residential Flat Building**
 - 1 bedroom dwelling – 0.75 spaces per dwelling;
 - 2 bedroom dwelling – 1 space per dwelling;



1 Walkerville Terrace, Gilberton

Waste Management Plan



Date: 26 August 2024

Prepared for:

Citify

Colby Phillips Advisory Pty LtdSuite 117, Pirie Street
Adelaide, SA 5000

info@colbyphillips.com.au

| Rev. | Date | Description | Doc No./Name | Originator | Approved |
|------|---------|----------------------|--------------|------------|----------|
| 0 | 15Jun23 | For lodgement | WMP | JPH | KC |
| 1 | 22Jun23 | Update tenancy mix | WMP | JPH | KC |
| 2 | 30Aug23 | Council corres added | WMP | JPH | KC |
| 3 | 14Dec23 | Revised townhouses | WMP | JPH | KC |
| 4 | 26Aug24 | New site layout | WMP | JPH | |

Distribution List

- Joel Wilkinson Citify
- Kent Cook Citify
- Jacqui Stacey SMF Architects
- Chelsea Jurek URPS

DISCLAIMER: This document has been prepared by Colby Phillips Advisory Pty Ltd for a specific purpose and client (as named in this document) and is intended to be used solely for that purpose by that client.

The information contained within this document is based upon sources, experimentation and methodology which at the time of preparing this document were believed to be reasonably reliable and the accuracy of this information after this date may not necessarily be valid. This information is not to be relied upon or extrapolated beyond its intended purpose by the client or a third party unless it is confirmed in writing by Colby Phillips Advisory that it is permissible and appropriate to do so.

Unless expressly provided in this document, no part of this document may be reproduced or copied in any form or by any means without the prior written consent of Colby Phillips Advisory or the client.

The information in this document may be confidential and legally privileged. If you are not the intended recipient of this document (or parts thereof), or do not have permission from Colby Phillips Advisory or the client for access to it, please immediately notify Colby Phillips Advisory or the client and destroy the document (or parts thereof).

This document, parts thereof or the information contained therein must not be used in a misleading, deceptive, defamatory or inaccurate manner or in any way that may otherwise be prejudicial to Colby Phillips Advisory, including without limitation, to imply that Colby Phillips Advisory has endorsed a product or service.

Contents

| | | |
|------|--|----|
| 1 | Introduction | 3 |
| 2 | Waste services Summary | 3 |
| 3 | Development Description | 4 |
| 3.1 | Development metrics | 4 |
| 4 | Design Assumptions | 7 |
| 4.1 | Waste & Recycling Service Provision | 7 |
| 4.2 | Waste & Recycling Volumes..... | 7 |
| 5 | Waste Management System | 10 |
| 5.1 | Waste Storage Area(s) | 10 |
| 5.2 | Residential waste (Apartments)..... | 12 |
| 5.3 | Tower (consisting of apartments and restaurant/commercial) | 13 |
| 5.4 | Maintenance Services | 18 |
| 5.5 | External | 18 |
| 5.6 | Bin cleaning (& On-site Bin Wash Area) | 18 |
| 5.7 | Transfer pathways | 19 |
| 5.8 | Collection & Traffic | 20 |
| 5.9 | Management & Communication..... | 20 |
| 5.10 | Other Waste System Design or Management Issues..... | 22 |
| 6 | Planning & Design Code Objectives..... | 24 |

1 INTRODUCTION

This document presents a waste management plan (WMP) for the 1 Walkerville Terrace Mixed Use Development (the “Development”). The Development is a combination of Commercial and Residential. The Project Proponent is Citify, the Architect is Stallard Meek Flightpath Architects (SMFA), and the Traffic Engineer is Cirqa.

The WMP explains how the Development can manage waste effectively to achieve regulatory requirements and desired design and operating objectives, including those recommended by the South Australian Better Practice Guide (State Guideline) (Zero Waste SA, 2014), the Planning & Design Code (PlanSA, 2024) and Council expectations for waste management in this type of development. The WMP should be read in conjunction with other planning approval documentation for the Development.

2 WASTE SERVICES SUMMARY

The following provides a summary of the waste services proposed at the site:

| | Disposal | Collection by | Collection frequency (per week) | | | | |
|------------------------------|---|---|---------------------------------|-----------|-----------|------------|-------|
| | | | General Waste | Recycling | Cardboard | Food Waste | Other |
| 2-storey apartments | Central ground floor bin room 3-bin system | Private Contractor From Loading dock | 2 | 2 | - | 1 | - |
| Tower apartments | 3 x waste chutes at each level General Waste, Mixed Recycling, Food Waste Bulky waste at each level | Private Contractor From Loading dock | 2 | 2 | - | 2 | - |
| Serviced apartments | 2 x waste chutes General Waste & Mixed Recycling Food Waste disposed to ground. level bin room by service staff where applicable. Cardboard disposal (e.g. cartons) to ground level bin room. | Private Contractor From Loading dock | 3 | 2 | 3 | 3 | 2 |
| Restaurants and cafes | Staff dispose waste to bin room. Systems for separation of Food Waste, Cardboard, Mixed Recycling, Landfill waste | Private Contractor From Loading dock | | | | | |

3 DEVELOPMENT DESCRIPTION

The Development is at 1 Walkerville Terrace, Gilberton in the Town of Walkerville (Council) – see Figure 3-1 below which shows an overview of the site. Per plans provided (Drawings-B1.00 to B4.10 Rev 4, dated 22 Aug 2024), the Development is a mixed use, multi-storey building with frontage to Walkerville Terrace and Northcote Terrace.

3.1 Development metrics

Table 3-1 gives the proposed Development Metrics. In summary, the Development would comprise:

- *Residential 2-storey Apartments*
 - 1 x 1-bedroom apartment
 - 12 x 2-bedroom apartments
 - 1 x 3-bedroom apartments
- *Tower Apartments (Levels 3 – 9)*
 - 34 x 1-bedroom apartments
 - 38 x 2-bedroom apartments
 - 33 x 3-bedroom apartments
 - 11 x 4-bedroom apartments
- *Commercial Serviced Apartments (Level 1 - 2)*
 - 57 x 1-bedroom serviced apartments
- *Flexible commercial tenancies (Located at Ground Level)*
 - 1 x Restaurant incorporating the existing Buckingham Arms building (203 m²)
 - 1 x Restaurant (262 m²)
 - 1 x Café (109 m²)
 - 1 x Restaurant (132 m²)
 - 1 x Restaurant (288 m²) / Bar (121 m²)
- *Commercial Function Area (Located at Level 1)*
 - 1 x Function Room incorporating the existing Buckingham Arms building (157 m²)

The above retail and commercial tenancy profile is based on the Proponent's commercial expectations. The final mix of commercial and retail tenancies would be decided when the building is complete and becomes operational.

Table 3-1 below includes the recommended Waste Resource Generation Rate (WRGR) classification (for each land use) based on the State Guideline (Zero Waste SA, 2014), which are used for estimation of waste and recycling volumes to assess waste storage required for the site.

Table 3-1: Summary of land uses for the Development, their WRGR Description(s) and relevant Development Metric(s). Retail and Commercial tenancies are preliminary assumed uses

| Land Use | Description | Site Location | Land Use Type ⁺ | Dev. Metric(s) | |
|-------------|-----------------------------------|---------------|-----------------------------------|----------------|-----------|
| Residential | Apartments | | High Density Residential Dwelling | 14 | Dwellings |
| | | | | 28 | bedrooms |
| | Tower Apartments | Level 3 - 9 | High Density Residential Dwelling | 116 | Dwellings |
| | | | | 253 | bedrooms |
| Commercial | Bar/ Restaurant (Buckingham Arms) | Level G | Restaurant / Café | 201 | m2 GFA |
| | Serviced Apartments | Level 1 - 2 | Hotel or Motel Accommodation | 57 | bedrooms |
| | Function Rooms (Buckingham Arms) | Level 1 | Showroom | 157 | m2 GFA |
| | Restaurant | Level G | Restaurant / Café | 242 | m2 GFA |
| | Café | Level G | Light Café | 147 | m2 GFA |
| | Restaurant | Level G | Restaurant / Café | 110 | m2 GFA |
| | Restaurant | Level G | Restaurant / Café | 276 | m2 GFA |
| | Bar | Level G | Bar | 121 | m2 GFA |

+ Land Use Type is based on waste classifications in State Guideline

* Derated Café WRGRs from State Guideline: General waste = -50%, Recycling = -50%, Food Waste = - 50%, 75% activated area

26 August 2024

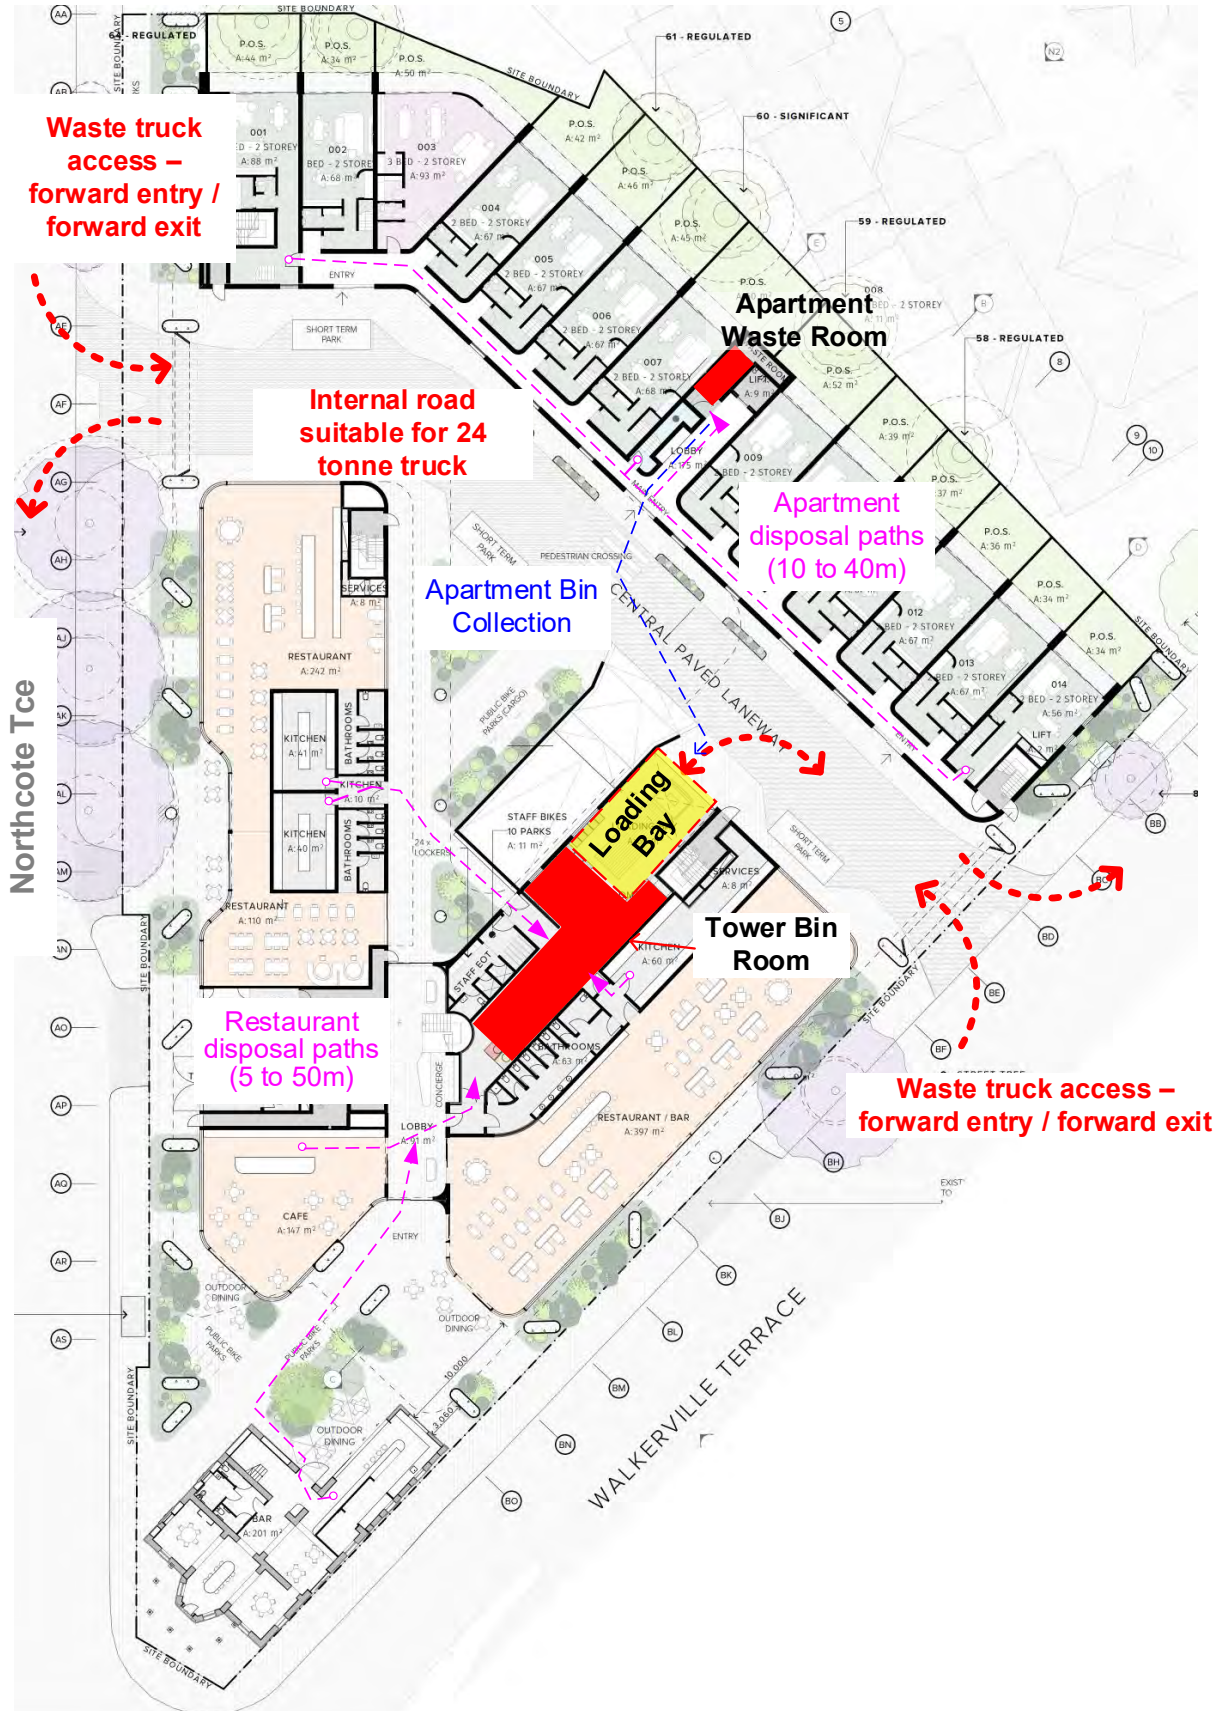


Figure 3-1: Site Overview

4 DESIGN ASSUMPTIONS

4.1 Waste & Recycling Service Provision

Table 4-1 outlines the recommended waste services by land use per Table 3-1. The different waste service classifications listed in Table 4-1 are explained below.

- **Routine Services** – These require on-site waste storage and routine and regular collections, and would include services for general waste, dry (comingled) recyclables and food waste.
- **At-call services** – These involve non-frequent collections, such as Hard waste and are organised and provided on an as-needed basis.
- **Maintenance services** – Some waste items (e.g. lighting in common areas or commercial tenancies, sanitary waste in public/common toilets) would be removed and disposed of (off-site) by the contractor providing the related maintenance service (and hence on-site waste storage is not usually needed or provided).
- **External Services** – These are where waste items (e.g. printer cartridges, batteries, lighting) that can be dropped off by tenants/residents at external locations (e.g. Officeworks, waste depot) (and thus, separate on-site waste storage is not usually needed or provided).

All waste collection services for the site (including the residential apartments in the tower) are to be provided by a Private Contractor engaged by the Body Corporate.

4.2 Waste & Recycling Volumes

Table 4-2 estimates expected waste and recycling volumes for the Development (in Litres/week).

- Waste Resource Generation Rates (WRGRs - in the State Guideline) do not exist for sanitary, lighting, printer cartridge or battery waste.
 - Volumes of these waste items, however, are relatively small, and thus, have not been estimated.
- The Light Café tenancy WRGRs are derated Café / Restaurant WRGRs (to reflect the fact a Café is not a full-service restaurant, which the WRGRs in the State Guidelines are based on – refer to Table note).

26 August 2024

Table 4-1 Expected or recommended waste & recycling services for the Development

| Service Type | Residential | | Commercial | | | | | | | |
|--|---|----------------------|--------------------------------------|---|---------------------|-------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|
| | Apartments | Tower Apartments | Restaurant | Bar/ Restaurant (Buckingham Arms) | Serviced Apartments | Function Rooms (Buckingham Arms) | Café | Restaurant | Restaurant | Bar |
| Routine (regularly scheduled) | General Waste | General Waste | General Waste | General Waste | General Waste | General Waste | General Waste | General Waste | General Waste | General Waste |
| | Recycling | Recycling | Recycling | Recycling | Recycling | Recycling | Recycling | Recycling | Recycling | Recycling |
| | Food Organics | Food Organics | Cardboard | Cardboard | | | Cardboard | Cardboard | Cardboard | Cardboard |
| | | | Food Organics | Food Organics | Minor Food Organics | | Food Organics | Food Organics | Food Organics | Food Organics |
| | | | Recycled deposit containers (OPTION) | Recycled deposit containers (OPTION) | Confidential Paper | | Recycled deposit containers (OPTION) | Recycled deposit containers (OPTION) | Recycled deposit containers (OPTION) | Recycled deposit containers (OPTION) |
| | | Cooking Oil (OPTION) | Cooking Oil (OPTION) | | | | Cooking Oil (OPTION) | Cooking Oil (OPTION) | | |
| At-call (as needed) | Hard/E-waste Printer Cartridges Batteries | | | | | | | | | |
| Maintenance (waste removed by contractor) | Sanitary (in-room or public toilets) Lighting (where applicable) | | | | | | | | | |
| External (by tenant off-site) | Not applicable | | | | | | | | | |

26 August 2024

Table 4-2 Estimated waste & recycling volumes (Litres/week) for Development.

| Waste/Recycling Service | Residential | | Commercial | | | | | | | |
|----------------------------|-------------------|-------------------------|-------------------|--|----------------------------|---|---------------|-------------------|-------------------|---------------|
| | <i>Apartments</i> | <i>Tower Apartments</i> | <i>Restaurant</i> | <i>Bar/ Restaurant (Buckingham Arms)</i> | <i>Serviced Apartments</i> | <i>Function Rooms (Buckingham Arms)</i> | <i>Café</i> | <i>Restaurant</i> | <i>Restaurant</i> | <i>Bar</i> |
| | <i>L/week</i> | <i>L/week</i> | <i>L/week</i> | <i>L/week</i> | <i>L/week</i> | <i>L/week</i> | <i>L/week</i> | <i>L/week</i> | <i>L/week</i> | <i>L/week</i> |
| General Waste | 840 | 7,600 | 2,500 | 2,060 | 2,000 | 470 | 1,200 | 1,130 | 2,800 | 320 |
| Dry Comingled Recycling | 700 | 6,325 | 410 | 340 | 1,000 | 110 | 190 | 190 | 470 | 60 |
| Cardboard | | | 990 | 820 | | | 460 | 450 | 1,130 | 130 |
| Recycled Deposit Container | | | 250 | 210 | | | 120 | 110 | 280 | 130 |
| Confidential Paper | | | | | 100 | | | | | |
| Food Organics | 280 | 2,500 | 2,500 | 2,110 | 200 | | 770 | 1,160 | 2,900 | 20 |
| TOTAL | 1,820 | 16,425 | 6,6650 | 5,540 | 3,300 | 580 | 2,740 | 3,040 | 7,580 | 660 |

Modified Restaurant WRGR to reflect tenancy capacity: General waste WRGR derated by 35%, recycling/cardboard by 35%, and food waste by 50%.

Modified Café WRGR to reflect Light Café tenant: General waste WRGR derated by 50%, recycling/cardboard by 50%, and food waste by 75%.

5 WASTE MANAGEMENT SYSTEM

5.1 Waste Storage Area(s)

Various waste storage areas are provided throughout the development. These divide into 3 categories:

- In-tenancy bins, which are accessed by occupants of the tenancy on a frequent basis (multiple times per day).
- Tower Waste Disposal Room
 - o All commercial waste from the tower and Buckingham Arms building is to be disposed to skip bins in this room. Disposal will be by tenants or commercial cleaners.
 - o All residential waste from the tower apartments and serviced apartments is to be disposed via waste chutes accessed at each level. The chutes will discharge into separate skip bin systems in the Waste Disposal Room. A bin conveyor may be installed to change over full to empty bins for tower apartment waste.
- The apartments will have storage space for a set of shared ship bins in a designated waste room. Each apartment resident will be responsible disposing of waste into these bins.

The various bin storage areas are as described further below. Table 5-1 (page 11) gives a schedule of recommended bin storages in each of these waste storage areas for routine Services (based on estimated waste volumes in Table 4-2 on page 9) and includes for each land use and service:

- *Number and type of bins;*
- *Collection frequency (expected or proposed); and*
- *Service provider.*

26 August 2024

Table 5-1 Waste storage and bin schedule for Routine Services, including collection frequency and collection service provider. *The type and size of bins for some commercial services may be refined in consultation with the commercial waste contractor when the building becomes operational*

| Use | Local Disposal Location | Routine Service | Estimated Waste/Recycling Volumes (L/wk) | Collection Frequency (Events/wk) | Provider | Max. Bins/Items Stored & Collected (per Event) | | |
|---|--|-------------------------|--|----------------------------------|-------------------|--|----------|------|
| | | | | | | No. | Size (L) | Type |
| Apartments | Apartment waste room | General Waste | 840 | 2 | Private Rear-Lift | 1 | 660 | Skip |
| | | Dry Comingled Recycling | 700 | 2 | | 1 | 660 | Skip |
| | | Food Organics | 280 | 1 | | 1 | 660 | Skip |
| Tower Apartments | Chute Room at each Level | General Waste | 7,600 | 2 | Private Rear-Lift | 4 | 1,100 | Skip |
| | | Dry Comingled Recycling | 6,325 | 2 | | 4 | 1,100 | Skip |
| | | Food Organics | 2,500 | 2 | | 3 | 660 | Skip |
| Serviced Accom and F&B (Tower) | Chute Room at each level & Ground Level Tower Waste Room | General Waste | 12,480 | 3 | Private Rear-Lift | 4 | 1,100 | Skip |
| | | Dry Comingled Recycling | 2,770 | 2 | | 2 | 1,100 | Skip |
| | | Cardboard | 3,980 | 3 | | 2 | 1,100 | Skip |
| | | Food Organics | 9,660 | 3 | | 6 | 660 | Skip |
| | | Confidential Paper | 100 | 1 | | 1 | 240 | MGB |
| | | Container Deposits | 1,100 | 1 | | 4 | 240 | MGB |

26 August 2024

5.2 Residential waste (Apartments)

Residents would be provided with suitable kitchen bins with handles to enable easy carriage from their dwellings to the Apartment Waste Room, e.g. Figure 5-1.

- a) General waste bin – at least 20L in size (bag lined)
- b) Co-mingled recycling waste bin - at least 20L in size
- c) Food organics bin (compostable bag lined)



(a)



(b)

Figure 5-1 Examples of suitable waste and recycling kitchen bins: (a) General waste & recycling - 2x20L Buckets with carry-handles in pull-out drawer; and (b): Bench-top food waste kitchen

It is proposed that apartments will access a shared set of skip bins, stored in the apartment waste room (see Figure 5-2). Disposal distance from the apartments to the bin room is between 10 – 40m, with only 2 apartments slightly exceeding the recommended distance of 30m in the South Australian Better Practice Guide.

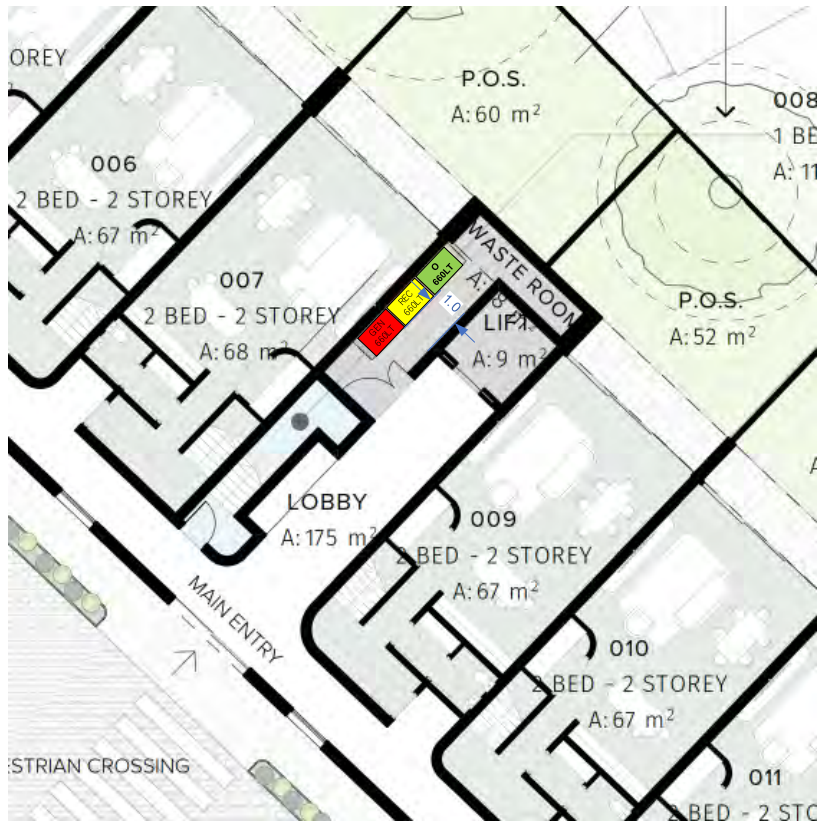


Figure 5-2 Apartments bin storage, Red = General Waste, Yellow = Mixed Recycling & Green = Organics

26 August 2024

All waste would be collected by a private contractor using rear-lift trucks. It is expected the volumes of waste produced by apartment residents would necessitate the following collection frequencies:

- 2 per week for General Waste
- 2 per week for Recycling
- 2 per week for Organics

Waste collection trucks would access the site in a forward direction from Northcote Terrace or Walkerville Terrace and stop in the loading bay from the internal road.

The Contractor would collect the bins from the waste room for emptying and return them once collection is completed. After collection, the truck can then exit in a reverse direction back onto the internal road and exit in a forward direction to Northcote Terrace or Walkerville Terrace (see Figure 3-1).

Turning paths have been assessed by the Traffic Engineer (Cirqa) and shown to be acceptable. Refer to Traffic Engineer's report.

5.3 Tower (consisting of apartments and restaurant/commercial)

5.3.1 Waste storage

All waste storage for the tower is combined in an enclosed room on the Ground Floor. The room can be accessed by commercial tenants and cleaners via two access doors. Bins are to be collected by a private contractor using Rear-Lift waste collection trucks parked in a loading dock adjacent the bin storage room.

The waste storage and collection are shown in Figure 3-1 (page 5).

Storage space is provided for Commercial Bins as quantified in Table 5-1 (page 11).

5.3.2 Residential waste (Apartments)

Residents would be provided with suitable kitchen bins with handles to enable easy carriage from their dwellings to the chute disposal room on each level (see Figure 5-5, page 16).

- a) *General waste bin – at least 20L in size (bag lined)*
- b) *Co-mingled recycling waste bin - at least 20L in size*
- c) *Food organics bin (compostable bag lined)*
 - General Waste (landfill), Mixed Recycling, and Food Waste will be disposed by residents through a central waste chute system located adjacent to lifts.
 - Disposal distance for apartment residents is between 5 and 50m. The chute system is located centrally to the site, and within 10m of the elevators.
 - A dedicated chute is to be provided for each of the three waste streams.
 - Space is also provided at each level for a bulky waste bin to reduce risk of blockages within the chutes (for example, large cardboard boxes, pizza boxes, etc). This waste would be cleared regularly by the building manager / cleaners and carried to the ground floor bin room.
 - Space in the Ground Level Waste Room is provided for:
 - 5 x 1,100L General Waste Skip Bin
 - 5 x 1,100L Recycling Skip Bin
 - 5 x 660L Organics Skip Bin
 - Including bins located under each chute

26 August 2024

Once the bins under chutes are full, building management will change out these bins with empty bins. This bin swap will be needed daily for General Waste and Recycling, every 2 to 3 days for food waste.

If preferred by the site operator, space is available to install a bin conveyor system that will automatically replace a full bin with an empty bin. Refer to Figure 5-3 below for a detailed view of the Tower bin room.

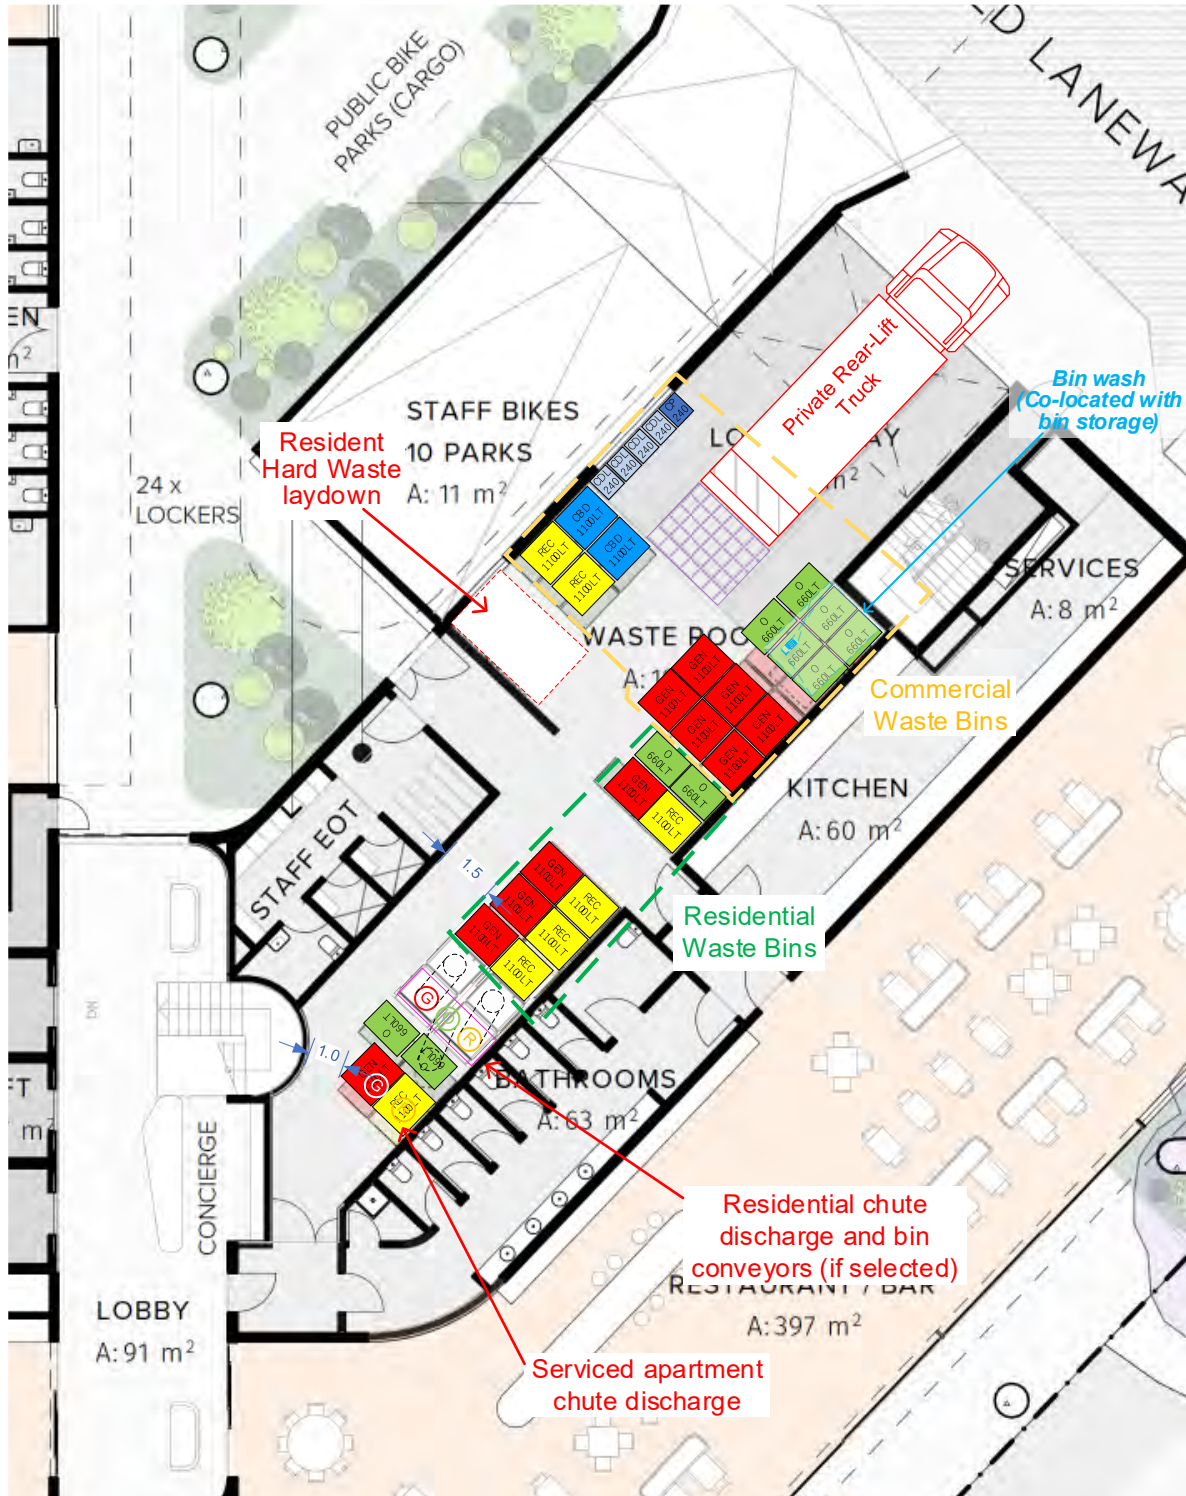


Figure 5-3 Waste storage and collection for tower tenancies and apartments

26 August 2024

5.3.2.1 Waste Chute Design

Installation of a waste chute in the Tower Building will conform to Building Code of Australia (BCA) requirements, including consideration for acoustic insulation to minimise noise impacts during operation, and provide for access by water and electrical services required for operation and maintenance (including cleaning) of the chute.

The waste chute should include an extraction fan, so the system can operate under negative pressure. It should also include an in-situ cleaning system to keep tube surfaces clean. Additional ventilation is likely to be required for the ground level bin room.

Design should consider including level monitoring / alarms for bins in service.

Easy access should be provided to chute lockout mechanisms.

Angles of deflection should be selected to minimise risk of blockages and minimise noise from waste hitting the chute deflection.

The chute discharge area (at Ground Level) will require suitable hard surfaces and installation of drains (to sewer) and grading of floors to capture wash water at the chute discharge points (from periodic chute cleaning). Floor treatments should wrap up the walls so liquid spills can be contained and easily cleaned.

The waste chute should be subject to a regular inspection and maintenance schedule to ensure reliable operation.

Figure 5-4 and Figure 5-5 provide examples of chute disposal access points and the layout of bin chute rooms.

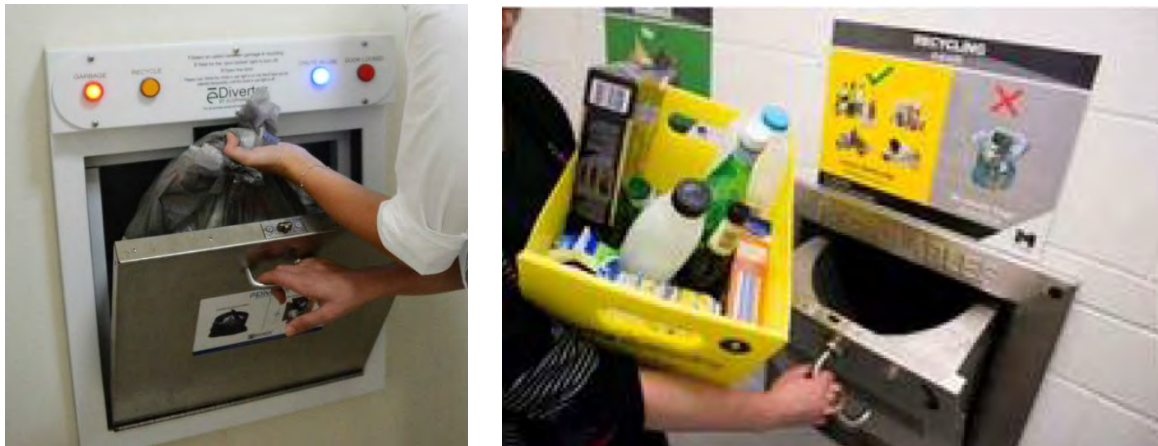


Figure 5-4 Example chute disposal access points

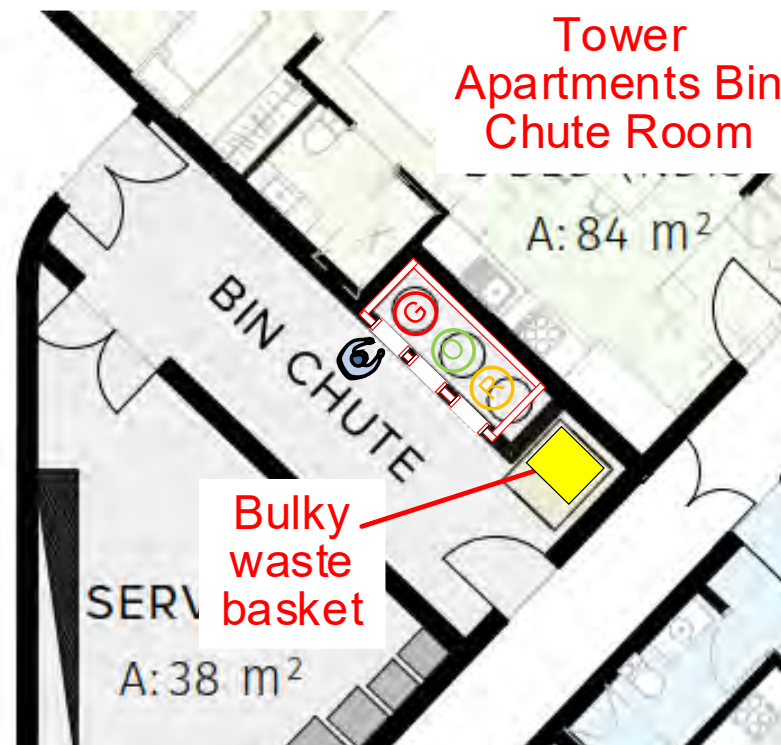


Figure 5-5 Example of Chute Bin Room for Tower Apartments

5.3.3 Commercial Tenancies

The commercial tenancies consist of:

- Serviced apartments
- Food and Beverage tenancy/tenancies

5.3.3.1 Serviced Apartments

Guests and cleaning staff for the serviced apartments would locally dispose of waste via a 2-chute (general waste and recycling) system. The volume of food waste generated by the serviced apartments would be minor and transferred by cleaners from the apartments to the Ground Floor bin room.

The chute system is positioned centrally across levels 1 and 2 and located adjacent to the lifts. The chute system would operate in the same manner as the chute system for the Tower Apartments with general waste and recycling skip bins collecting the waste in the Ground Floor bin room (see Figure 5-6).

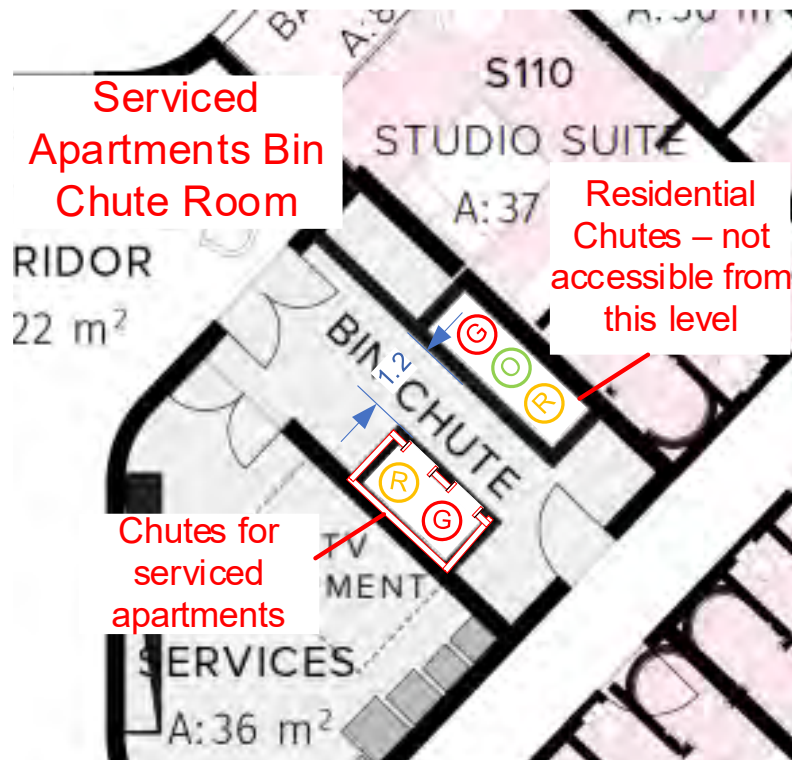


Figure 5-6 Example of Chute Bin Room for Serviced Apartments

5.3.3.2 Food and Beverage tenancies

Tenancies would have bins located in-tenancy for disposal of their waste and recycling.

The types and sizes of the bins would be decided during tenancy fit-out as they depend on type of commercial activity and services elected by the tenants.

Waste disposal transfer paths for each tenancy are shown in Figure 3-1 (page 5). Paths are between 20m and 60m distance. Access to the Bin Storage and Presentation Area would be with key or fob or secure access code.

Building management would be responsible for managing full and empty bins to ensure bin space is available for tenant disposal

5.3.4 Public / Communal space

Public space bins will be placed in two to three locations in the ground floor. Bins will also be placed adjacent the lifts at each basement level. Bins will be serviced (emptied) by building maintenance staff.

5.3.5 Collection

- All waste from the Tower waste room is to be collected by a private contractor using rear-lift trucks.
- Collections would be:
 - 3 per week for General Waste
 - 2 per week for Recycling
 - 3 per week for Cardboard
 - 3 per week for Organics
 - Weekly for Confidential Paper
 - Weekly for CDL / 10c Container Deposits

- The trucks would drive into the site in a forward direction from Northcote Terrace or Walkerville Terrace. Then reverse into the loading bay from the internal road.
- After collection, the truck can then exit in a forward direction back onto the internal road, then exit in a forward direction to Northcote Terrace or Walkerville Terrace (see Figure 3-1 (page 5)).
- Turning paths have been assessed by the Traffic Engineer (Cirqa) and shown to be acceptable. Refer to Traffic Engineer's report.

5.3.6 Hard/E-waste

- Building management will facilitate private hard waste collection services for residents.
- This would involve at-call hard waste collection by a private contractor.
- Where appropriate and arranged by management, the hard waste could be stored in the Bin Storage and Presentation Area at ground level, as shown in Figure 5-3 on page 14.
- The waste contractor would park in the loading bay to deliver the hard waste collection services.
- The Building User Manual(s) for residents at the Development would advise on availability and/or organizing the Hard /E-waste collection services.

5.4 Maintenance Services

Waste would be generated by some maintenance services or activities in the building and commercial tenancies at the site (e.g. lighting, repair work, cleaning of commercial toilets, etc.). These maintenance-generated waste materials would be handled and disposed of by the contractor undertaking these services. Dedicated on-site storage for these waste materials is therefore not needed.

5.5 External

Residents and commercial tenants would be able to dispose of smaller waste items, such as printer cartridges, batteries and lighting, to publicly available external drop off points (e.g. supermarkets, Office works, telco retail stores, etc.), which accept these materials.

The Building User Manual(s) for residents and commercial tenants at the Development will include advice on external drop-off points for these waste items, which may include reference to Council advice available at their Web site.

5.6 Bin cleaning (& On-site Bin Wash Area)

A dedicated on-site bin cleaning area would be provided inside the Bin Storage and Presentation Area— see Figure 5-3 (page 13).

- This bin wash area would require grading to a sewer drain with basket screen to remove gross solids, tiles or epoxy coating to water-proof adjacent walls and flooring, standard cold-water supply faucet (from cleaners sink) and commercial-grade electrical power supply (if pressure washer system is to be used), plus bunds and screens for use during bin wash events.
- Bin washing activity would be managed by the Building/Facilities Manager.
- Bin washing would be timed to occur immediately after bins are emptied.

26 August 2024

- Bin washing could be facilitated with a mechanical lifting device such as that shown in Figure 5-7



Figure 5-7 Mechanical bin washer Source: <https://emoveit.com.au/product/bin-blaster-mobile-wheelie-bin-washer>

Alternatively, bin cleaning at the Development could be outsourced to an external contractor (e.g. <http://binforce.com.au/>).

- These external contractors generally have self-contained bin washing systems on back of ute or truck that enable them to clean bins on site – e.g. Figure 5-8 below.
- Some service providers will remove bins from site, replacing them with an empty spare, clean the bins, then return them to site.



Figure 5-8 On-site bin wash system for rear-lift trucks on back of ute. Source: <http://binforce.com.au/>

5.7 Transfer pathways

There are range of transfer pathways for the waste systems at the Development, which were described earlier in Section 5. The following is provided as a guide for sizing and designing these transfer pathways.

26 August 2024

- *Transfer pathways –*
 - *User disposal – prefer less than 50m each way and free of steps, no grades greater than 1:15, and cater for mobility impaired users.*
 - *Local disposal points to central storage – enough width to accommodate relevant bins or waste loads being transferred, free of steps, no grades greater than 1:12*
 - *Collection – less than 30m with no steps or grades greater than 1:10*
- *Corridor widths –*
 - *240L MGBs or smaller bins / loads – min. 1,000 mm (1,200mm preferred)*
 - *660L skip bins – min. 1,200mm (1,400mm preferred)*
 - *1,100L skip skips and/or other waste loads – min. 1,500mm (1,600mm preferred)*
- *Doors –*
 - *Local disposal access – 800mm*
 - *Transfer pathways– Appropriate to the size of bin to be transported, e.g.*
 - *240L MGB (or smaller) – min. 800mm*
 - *660L skip – min. 900mm, prefer 1,200mm*
 - *1,100L skip – min 1,400mm, prefer 1,600mm*
- *Floors – Hard surfaces where bins and skips are to be carted*

Based on current plans, these requirements for transfer pathways in the Development appear to be generally satisfied. All relevant transfer pathways should be reviewed and confirmed at detailed design stage to ensure they are appropriate.

5.8 Collection & Traffic

The waste collection point for the Development introduced above is reiterated below.

- All collections are made from the loading bay adjacent the Tower bin room, per Figure 3-1 (page 5).
- Overhead clearance of minimum 3.8m (from floor to ceiling) is required for rear lift trucks for access and operation of the bin lifting equipment.
- Collection should be completed within 15 minutes per service.
- The collections should be scheduled to minimise impacts on traffic accessing the building.

Access to the Loading Bay is from Northcote Terrace or Walkerville Terrace with trucks entering and exiting the site in a forward direction. Swept path analysis has been carried out by the traffic engineer to ensure safe reversing access into the loading bay.

Refer to the Traffic Report by Traffic Engineer for additional discussion of collection truck access to the Development.

5.9 Management & Communication

5.9.1 Responsibilities

Table 5-2 summarises the responsibilities of different parties / stakeholders for proposed waste management and operational activities at the Development. In summary:

- **Residents** – The Building / Facilities Manager would be responsible for managing the waste system, but residents would play an important role in managing their local disposal activities and accessing the Council hard waste service, and Council (at its discretion) may support the Building / Facilities Manager with resident engagement and education to help drive good waste management outcomes.

- **Commercial tenancies** – The Building / Facilities Manager would manage the waste system, including ensuring that good waste management outcomes by tenants were achieved.

Table 5-2 Management & operational responsibilities for the waste systems at the Development

| Waste System | Activity | Responsible party |
|---|--|---|
| Residential (Apartments and Tower Apartments) | <i>Local Disposal</i> | Residents |
| | <i>Waste Storage Areas, Hygiene, Odour Management & Cleaning</i> | Building Manager |
| | <i>Collection services – Standard Waste & Recycling</i> | Commercial / Private Contractor(s) |
| | <i>Collection services – Hard Waste</i> | Council or Commercial / Private Contractor(s) |
| | <i>Management</i> | Building Manager |
| | <i>Education, Training & Engagement</i> | Building Manager with support from Council |
| Commercial (Serviced Apartments & F&B tenancies) | <i>Local Disposal, Hard Waste & External Disposal</i> | Guests (local disposal only), Tenants |
| | <i>Waste Storage Areas, Hygiene, Odour Management & Cleaning</i> | Tenants, Building Manager |
| | <i>Collection services – Standard Waste & Recycling</i> | Commercial / Private Contractor(s) |
| | <i>Management</i> | Building Manager |
| | <i>Education, Training & Engagement (tenants)</i> | Building Manager |

5.9.2 Implementation & Communication

5.9.2.1 Residential

To successfully implement this WMP, the following should be put in place.

- **Mandated responsibilities for all apartment residents** – Obligations for residents to properly access, operate and use the waste systems provided should be written into any tenancy residency agreement and/or incorporated into the Community/Strata plan lodged with the Lands Titles Office.
- **Resident Induction** – Should include first-day guidance on how to correctly use the waste systems.
- **Building User Manual** – Advice and instructions on waste management and using the waste systems should be included in the Building User Manual(s) developed for residents, including contact information for further information, questions and issues.
 - *This may include advice to residents on how to properly dispose of other waste / recycling items including lighting, batteries and hazardous household waste*
- **Emergency Response &/or Property Management Plan(s)** – Should include response measures (or contingencies) for:
 - *Collection services suspended or not available;*
 - *Incorrect use by residents of the waste systems; and*
 - *Illegal dumping on-site.*

26 August 2024

5.9.2.2 Commercial/Retail tenants

Like the residential system above, the following should be put in place for the commercial system:

- **Community/Strata title arrangements for commercial property owners** – Obligations for the commercial tenants and/or property owners to properly access, operate and use the waste systems would be written into any tenancy agreement and the Community/Strata plan lodged with the Lands Titles Office.
- **Site Management System / Manual** – Advice and instructions on waste management and using the waste systems should be provided for tenants, including contact information for further information, questions and issues.
- **Tenant Induction** – Should include guidance on how to correctly use waste /recycling bins as well as the site approach to waste and recycling.
- **Emergency Response or Site Management Plan(s)** – Should include response measures (or contingencies) for:
 - *Waste collection services suspended or not available;*
 - *Incorrect use by tenants of the waste systems;*
 - *Illegal dumping on-site; and*
 - *Poor waste management outcomes (including cleanliness, odour and/or low diversion).*

5.10 Other Waste System Design or Management Issues

The following would be considered and/or implemented for waste systems at the Development. More details for some of these items can be resolved at detailed design stage with the waste contractor and/or Council.

- 1) **Bins** – These would comply with Australian Standard for Mobile Waste Containers (AS 4213). Residential bins would be supplied by Council.
- 2) **Signage** –
 - Appropriate signage in all Local Disposal and Waste Storage Areas should be used to ensure correct disposal of waste and recycling.
 - This signage should conform to the signage requirements of Council and/or the State Guideline (Zero Waste SA, 2014).
 - Consider signs with pictorial diagrams and/or multiple languages
- 3) **Vermin, hygiene & odour management (inc. ventilation)**
 - **Inspection & Cleaning** –
 - An inspection and cleaning regime would be developed and implemented by the Building / Facilities Manager for waste systems at the Development, including ensuring that surfaces and floors around disposal areas, transfer pathways and waste storage areas are kept clean and hygienic and free of loose waste and recycling materials.
 - *Where putrescible general waste or food waste is being stored, Local Disposal and Waste Storage areas should be graded to a sewer drain with tiling or epoxy coating to floors and adjacent walls to waterproof the area and for cleaning.*
 - **Odour Control** –
 - All Waste Storage Areas –
 - *Where putrescible general waste or food waste is being stored, these areas would be mechanically ventilated for control of odours.*

26 August 2024

- *The ventilation would extract to atmosphere, to prevent odour build up.*
- *The extraction vent discharge location would be selected to avoid impact on residents, tenants and/or neighbours.*
- *It should be a requirement for food waste bins in Waste Storage areas that lids are closed after use.*

4) **Access & security** –

- All Waste Storage Areas (residential and commercial) in the Building should be secure and only accessible by key or fob or access code.
 - *This key or fob or access codes would be provided to residents, tenants, property management staff and/or waste contractor(s) collecting from these areas.*
 - *CCTV is recommended to monitor waste disposal practices in all Waste Storage Areas.*

26 August 2024

6 PLANNING & DESIGN CODE OBJECTIVES

The applicable policies relating to Waste are provided in the following table. The third column states how these policies have been addressed in the proposed design.

| Design in Urban Areas | | |
|---|-------------------------------------|--|
| All Development | | |
| PO 1.5 The negative visual impact of outdoor storage, waste management, loading and service areas is minimised by integrating them into the building design and screening them from public view (such as fencing, landscaping and built form), taking into account the form of development contemplated in the relevant zone. | DTS/DPF 1.5 None are applicable | Response: The bin room is fully contained and enclosed within the building envelope. |
| Site Facilities / Waste Storage (excluding low rise residential development) | | |
| PO 11.1 Development provides a dedicated area for on-site collection and sorting of recyclable materials and refuse, green organic waste and wash bay facilities for the ongoing maintenance of bins that is adequate in size considering the number and nature of the activities they will serve and the frequency of collection. | DTS/DPF 11.1 None are applicable | Response: Collection systems are provided for source-separated landfill, recycling, food waste, and cardboard. A bin wash area/system is to be included in the Ground Floor bin room. |
| PO 11.2 Communal waste storage and collection areas are located, enclosed and designed to be screened from view from the public domain, open space, and dwellings | DTS/DPF 11.2 None are applicable | Response: Bins are to be stored in an enclosed ventilated room at Ground Level. Residential tenants and Guests will dispose waste into the Apartment Bin room or chutes, with a 3-chute system (2-chute system for Serviced Apartments) provided at each residential level for separate disposal of General Waste, Recycling, and Organics/Food Waste |
| PO 11.3 Communal waste storage and collection areas are designed to be well ventilated and located away from habitable rooms. | DTS/DPF 11.3 None are applicable | Response: Bins are to be stored in an enclosed ventilated room at Ground Level. |
| PO 11.4 Communal waste storage and collection areas are designed to allow waste and recycling collection vehicles to enter and leave the site without reversing. | DTS/DPF 11.4 None are applicable | Response: Waste Trucks will enter the site from Northcote Terrace or Walkerville Terrace and reverse into the Loading Dock adjacent the bin room. Trucks will forward-exit out of the Loading Dock and into Northcote Terrace or Walkerville Terrace. Refer to Traffic Engineer's report for discussion of truck movements. |
| PO 11.5 For mixed use developments, non-residential waste and recycling storage areas and access provide opportunities for on-site management of food waste through composting or other waste recovery as appropriate | DTS/DPF 11.5 None are applicable | Response: Space is allowed for sorting and collection of a variety of wastes. Bins are to be provided for separation of food waste for collection and composting off-site |

26 August 2024

| | | |
|--|---|--|
| All non-residential development | | |
| <p>PO 43.1 Areas for activities including loading and unloading, storage of waste refuse bins in commercial and industrial development or wash-down areas used for the cleaning of vehicles, plant or equipment are:</p> <ul style="list-style-type: none"> a) designed to contain all wastewater likely to pollute stormwater within a bunded and roofed area to exclude the entry of external surface stormwater run-off b) paved with an impervious material to facilitate wastewater collection c) of sufficient size to prevent 'splash-out' or 'over-spray' of wastewater from the wash-down area d) are designed to drain wastewater to either: <ul style="list-style-type: none"> i. a treatment device such as a sediment trap and coalescing plate oil separator with subsequent disposal to a sewer, private or ii. Community Wastewater Management Scheme or a holding tank and its subsequent removal off-site on a regular basis. | <p>DTS/DPF 43.1 None are applicable</p> | <p>Response: A Loading Dock and Bin Room are provided within the property boundary at Ground Level. A bin wash is to be provided in the bin room, with connection to the sewer via a maintainable basket screen with 3mm holes. The room is fully contained to prevent stormwater from entering the sewer.</p> |

Citify

1-9 Walkerville Terrace

Sustainability Strategy Report

D Squared Consulting Pty Ltd
Trading as dsquared
ACN 159 612 067
ABN 38 159 612 067

Level 1, 199A Rundle Street
Adelaide SA 5000
T: 0405 106 268
E: paul@dsquaredconsulting.com.au
W: www.dsquaredconsulting.com.au

Project Number: 2971



Document Control

| Issue | Date | Change | Checked | Approved |
|-------|----------|---|---------|----------|
| 01 | 01/12/23 | First draft issue for comment | BH | PD |
| 02 | 22/02/24 | Updated with client comments | BH | PD |
| 03 | 16/08/24 | Updated based on new design. Issued for comment | BH | PD |
| 04 | 03/09/24 | Updated with client comments | BH | PD |
| | | | | |
| | | | | |
| | | | | |

Our Vision is to **think beyond the square.**

Our Mission is to create spaces, places, and communities that are positive for both the environment and for people. We will do this by providing our clients with sustainable and bespoke solutions that are innovative, challenge perceived ideas, and push the boundaries of achievement and excellence.

We confirm that all work has been undertaken in accordance with our ISO 9001 accredited quality management system.

Acknowledgement of country

The dsquared team wish to acknowledge the Traditional Custodians of all country throughout Australia, and their cultural, spiritual, physical, and emotional connection with their land, waters, and community. We pay our respects to all Elders past, present, and emerging.

Contents

| | |
|---|---|
| Document Control | 2 |
| Contents | 3 |
| 1 Introduction | 4 |
| 1.1 Introduction | 4 |
| 1.2 Vision | 4 |
| 1.3 Author | 4 |
| 2 Performance | 5 |
| 2.1 NatHERS | 5 |
| 2.2 Energy and GHG Emissions | 5 |
| 2.3 Heat Island and Microclimate | 5 |
| 2.4 Climate Change | 5 |
| 2.5 Façade | 6 |
| 2.6 Daylight | 6 |
| 3 Initiatives | 7 |
| 3.1 Community and Social Sustainability | 7 |
| 3.2 Energy | 7 |
| 3.3 Water | 8 |
| 3.4 Waste | 8 |
| 3.5 Transport | 9 |
| 3.6 Indoor Environment Quality | 9 |
| 3.7 Construction | 9 |

1 Introduction

1.1 Introduction

This document summarises the Sustainability Strategies and ESD initiatives which will be applied to the new mixed-use development at 1-9 Walkerville Terrace, Gilberton, SA in order to reduce the development's impact on the environment in both construction and operation. This report follows the development of the building design by the integrated design team lead by Citify.

1.2 Vision

The sustainability vision and outcomes proposed are summarised as follows:



Social Sustainability

Homes for Homes

- _ commitment of 0.1% of sales value to Homes for Homes
- _ all apartments achieve a NatHERS average of 7.7 Stars
- _ extensive integrated planting and landscaping
- _ 80% reduction in heat island effect via landscaping and surface treatments
- _ rainwater reuse for landscape irrigation
- _ sensitive refurbishment of Buckingham Arms heritage building

Energy and Emissions

Carbon Neutral Ready

- _ inset energy network
- _ 30% more energy efficient than building code
- _ centralised hot water and air-conditioning systems
- _ all-electric precinct
- _ 90kW solar PV
- _ low cost, 100% renewable energy available

Verified Performance

- _ facade performance site tested to ATTMA standards
- _ 7.7 Star average NatHERS rating certification
- _ 60% of apartments certified 8 Star NatHERS

1.3 Author

This report has been prepared by Paul Davy, a Director of dsquared.

Paul has over 30 years' experience in the UK, Europe, Asia and Australia as an engineering, ESD, and sustainability consultant. Paul holds IEng and MCIBSE Accreditation, is a Green Star Certified Assessor, a Green Building Council of Australia Teaching Faculty Member, an Ambassador for the Living Futures Institute of Australia, a WELL Accredited Professional, and an Infrastructure Sustainability Accredited Professional.

Paul has been a member of the South Australian Government ODASA Design Review Panel since its inception.

2 Performance

2.1 NatHERS

The apartments will be designed to achieve a 7.7 Star NatHERS rating average, demonstrating a 20% improvement over the NCC/BCA average requirement of 6 Star average.

60% of the apartments will be designed to achieve an 8 Star NatHERS rating.

2.2 Energy and GHG Emissions

The development will be designed to achieve an overall reduction in building energy consumption by at least 30% lower than a NCC2022 deemed-to-satisfy building.

2.3 Heat Island and Microclimate

The precinct comprises more than 80% coverage of either landscaping or roofs with a high Solar Reflective Index (SRI) finish. The proposed pool will also contribute to mitigating heat island effect.

As such, the heat island effect of this site is expected to be reduced by more than 80%.

2.4 Climate Change

An analysis of the climate change impacts has been undertaken to identify any risks that the development will need to respond to and will include the following topics:

- Rainfall
- Temperature
- Humidity
- Flooding
- Solar radiation
- Bushfire severity
- Evapotranspiration
- Synoptic systems and storms
- Wind speed
- Soil conditions

Climate change risks to the project have been identified using the *SA Government Department for the Environment & Water Guidelines for Climate Change Risk Assessment*, and have been communicated to the project team to ensure the design and systems respond to a changing climate.

These are summarised as follows:

| Climate change risk | Mitigation Strategy |
|--|--|
| Temperature rise – leading to an increase in loading on air conditioning systems, electricity supply infrastructure, and thermal impact on equipment and residents | The facade systems are designed to provide a higher level of thermal comfort than code, with an average 7.7 Star NatHERS outcome. Systems infrastructure including air conditioning systems will be sized to cater for future load increases. |

| Climate change risk | Mitigation Strategy |
|--|--|
| | The deployment of planting and landscaping, in combination with external shading devices, will help to minimise heat island effect and human comfort stress in the public realm. |
| Increased storm intensity – increased peak storm frequency and impact, leading to an increase stormwater loading and potential back-flood risk | The stormwater infrastructure will be sized to cater for future predicted peak stormwater events. |
| Reduction in rainfall – reduction in annual rainfall leading to an increase in irrigation water demand for landscaping | The irrigation system is designed with the integration of a potable water feed service, such that water is available at all times when rainfall harvesting is insufficient. |

2.5 Façade

The façade glazing proposed is as follows:

Apartments: Fully thermally broken, double glazed. Vision Panel performance criteria: System U 2.3, SHGC 0.40, VLT 40%.

Retail/Commercial: High performance double glazing. Vision Panel performance criteria: System U 3.2, SHGC 0.25, VLT 40%.

The building façade will be air leakage pressure tested in-situ in accordance with AS/NZS ISO 9971:2015 using an ATTMA Licenced testing contractor.

2.6 Daylight

All apartments and retail/commercial tenancies will exceed the minimum NCC/BCA requirements for daylight access.

All common areas and corridors will have access to natural light, therefore reducing reliance on artificial lighting during the day.

3 Initiatives

3.1 Community and Social Sustainability

The following social sustainability initiatives are included:

1. The development will contribute 0.1% of sales value to the Homes for Homes initiative.
2. The apartment buildings' design affords views from and to dwellings to provide transparency and a visual connection between residents and the community and environment.
3. The apartment buildings' design allows for connection the local environment through passive design and natural ventilation via opening windows and balcony doors, with open air balconies, allowing residents to connect to nature and to adjust how they live in their dwellings according to the seasons.
4. All apartments include a balcony at least 2.6m deep to allow outdoor access under poor weather conditions.
5. Bicycle storage facilities are provided for apartment residents, and visitors to the buildings.
6. End of Trip facilities including bicycle storage, showers and lockers are provided to the staff servicing the retail/commercial tenancies.
7. All common areas have good access to daylight and ventilation.
8. The development will incorporate communal amenities including a private function space, wine room, golf simulator room, cinema room, and a gym which includes a steam room and sauna.
9. The development will also include a communal outdoor pool and terrace area, surrounded by deep rooted planting for access to nature, shade, and green space.
10. The development will undertake a sensitive refurbishment of Buckingham Arms heritage building.

3.2 Energy

The following Energy initiatives are included:

1. The development will be fully electrified and will not utilise fossil fuels (natural gas) for heating, cooling, hot water, or cooking.
2. An embedded network will be used with electricity being supplied via an inset network, so that residents can benefit from the option of reduced electricity supply rates and have access to 100% renewable energy or GreenPower supply contracts.
3. The deployment of rooftop and shade structure solar PV will be maximised, with a minimum of 90kW capacity provided.
4. The apartment designs also allow for the full natural ventilation of all dwellings through openable windows and balconies.
5. All residential common areas will be provided with daylight access to reduce artificial lighting energy use.
6. All external shading treatments and all glazing system specifications will be optimised using computer simulation techniques. Both the residential and commercial façade will comprise high performing double glazing. Glazing solar heat gain coefficients have been carefully selected to optimise winter solar gain and limit summer heat ingress.
7. Selection of energy efficient lighting fittings (LED) with automated lighting control systems to public spaces.

8. The use of exposed concrete soffits in living areas to provide thermal mass and suppress summer heat loads. In combination with the 7.7 Star NatHERS average level of thermal performance, the air-conditioning demand to living areas and in particular bedrooms will be reduced significantly.
9. Extensive metering and sub-metering for energy management, connected to an embedded network.
10. Using light coloured external finishes (in particular roof coverings) to reflect heat and reduce solar gain and reduce the heat island effect.
11. Using zero ODP refrigerants and insulation.
12. Designing and certifying the apartments to achieve an energy performance at least 20% better than current Building Code minimum NatHERS rating of 6 Stars average, representing a dwelling average NatHERS Rating of 7.7 Stars. 60% of the apartments rate at 8 Stars.
13. The external façade will be subject to air leakage pressure testing to ATTMA to significantly reduce the apartments energy consumption, and improve the apartment indoor air quality, particularly during high external air pressure conditions.

3.3 Water

The following Water initiatives are included:

1. Water efficient fittings with the minimum WELS ratings:
 - Taps 5 Stars
 - WCs 4 Stars
 - Showers 4 Stars
2. The storage of rainwater in dedicated water reuse tanks. The tanks will provide feed water for irrigation.
3. Selecting appropriate landscape planting to minimise irrigation water use, with a focus on a native planting species palette, vertical green walls, and deep soil tree coverage to the urban park zones.
4. In accordance with the WELL Building Standard, all drinking water tap outlets will be lead-free in accordance with AS 3688-2015.

3.4 Waste

The following Waste initiatives are included:

1. Construction waste will be minimised through efficient design techniques including standardisation and wherever practicable off-site pre-fabrication. A minimum 90% diversion from landfill rate will be targeted.
2. Provisions will be made for the location and use of separate bins for general, organic and recyclable waste. Refer to the separate waste management plan prepared by Colby Phillips Advisory.
3. The development will incorporate ventilated and weatherproof storage facilities for the collection and disposal of general, recyclable, organic waste, and bulky waste, which will be separated on site to facilitate ease of disposal for recycling.
4. Waste chutes will be provided to facilitate the transfer of occupant bagged waste from the apartment floors to the bin storage areas.

3.5 Transport

The following Transport initiatives are included:

1. Dedicated bicycle storage will be provided for residents.
2. End of Trip facilities such as bicycle racks, showers, and lockers will be provided for retail/commercial staff.
3. Space provision will be made for the parking of e-bikes including cargo bikes.
4. Provision for a Go-Get car service.
5. EV charging stations will be provided for at least 5% of the total non-residential carparking spaces in the development. Electrical infrastructure will be designed to be ready for the installation of additional EV charging stations in future to all car park spaces, on a resident opt-in basis.

A demand management and control system will be provided as part of the initial development, allowing the EV charging demand to be managed from the outset.

3.6 Indoor Environment Quality

The following Indoor Environment Quality initiatives are included:

1. Using paints, sealants, adhesives, carpets, coverings, and furniture which have low off-gassing properties (low VOC, low formaldehyde).
2. Maximising access to daylight to all areas whilst minimising glare.
3. Open air and naturally ventilated balconies will be provided to all apartments.
4. All apartments will be naturally ventilated.

3.7 Construction

The following Construction initiatives are included:

1. Select materials with a comparatively low embodied energy/carbon profile wherever practicable, e.g. fly ash in concrete, recycled content in thermal insulation, reinforcement bar, and ceiling/wall/floor coverings, to achieve at least 20% reduction in upfront carbon emissions.
2. Apartments have exposed soffits to living areas to reduce associated embodied emissions, whilst improving the thermal performance and comfort for the occupants;
3. Using off site pre-fabrication techniques to reduce on site construction time, waste, and greenhouse gas emissions, wherever practicable.
4. The development will seek to select locally sourced materials and labour wherever viable.
5. Using RVT Clash Detection as a design and construction management tool to minimise on-site clashes and abortive/wasteful work.

CONSTRUCTION ENVIRONMENTAL MANAGEMENT PLAN

Former Buckingham Arms
1 to 9 Walkerville Terrace
Gilberton, South Australia



Prepared for: Citify Group Pty Ltd
Date: 15 November 2023
Reference: JC1225_CEMP.02
Version: Final



Agon Environmental Pty Ltd

Address

3/224 Glen Osmond Road,
Fullarton, SA 5063

Phone

+61 8 8338 1009

Email

enquiries@agonenviro.com.au

A.B.N.

29 167 746 063

TABLE OF CONTENTS

AGON DOCUMENT CONTROL..... iv

1.0 INTRODUCTION..... 5

 1.1 Background 5

 1.2 CEMP Objectives 5

 1.3 Legislative Framework 5

 1.4 Supporting Documents 6

 1.5 CEMP Structure..... 7

2.0 ROLES AND RESPONSIBILITIES 8

3.0 SITE Details 10

 3.1 Site Description and Land Use 10

 3.2 Environmental Site History 10

 3.3 Site Specific Geology 12

 3.4 Site Specific Hydrogeology..... 12

 3.4.1 Groundwater Gauging Data..... 12

 3.4.2 Inferred Groundwater Flow 13

 3.4.3 Field Groundwater Quality 13

 3.5 Proposed Scope of Civil works 13

4.0 ASSESSMENT CRITERIA 14

 4.1 Soil Screening Criteria 14

 4.1.1 Human Health Screening Criteria 14

 4.1.2 Ecological Screening Criteria..... 14

 4.2 Soil Waste Disposal 15

 4.2.1 Aesthetic Considerations 15

 4.3 Groundwater Screening Criteria 15

 4.3.1 Recreation and Aesthetics Criteria 16

 4.3.2 Aquatic Freshwater Ecosystems 16

5.0 SITE ENVIRONMENTAL SUMMARY 17

 5.1 Environmental Soil Conditions..... 17

 5.2 Environmental Groundwater Conditions..... 17

6.0 INDUCTION, TRAINING AND AWEARNESS..... 19

 6.1 Training 19

 6.2 Induction 19

- 6.3 Safety/Toolbox..... 20
- 7.0 REPORTING 21
 - 7.1 Incidents and Complaints..... 21
 - 7.2 Environmental Inspections 21
 - 7.3 Non-Conformances and Corrective Actions..... 21
 - 7.4 Document Control..... 22
 - 7.5 Emergency Response 22
 - 7.6 Emergency Procedures 22
- 8.0 ENVIRONMENTAL RISK ASSESSMENT..... 23
 - 8.1 Environmental Aspects 23
 - 8.2 Environmental Aspects 23
 - 8.3 Risk Assessment 24
- 9.0 ENVIRONMENTAL CONTROL PLANS 27
 - 9.1 Workplace Health and Safety 27
 - 9.2 Groundwater Management 27
 - 9.3 Air Quality 28
 - 9.4 Noise and Vibration 29
 - 9.5 Erosion and Sediment Control 30
 - 9.6 Soil Management 31
 - 9.7 Site Contamination Management..... 32
 - 9.8 Hazardous Materials Management 33
 - 9.9 Waste Management 34
- 10.0 UNEXPECTED FINDS PROTOCOL 35
 - 10.1 Purpose 35
 - 10.2 Known Sources of Contamination 35
 - 10.3 General Environmental Controls 35
 - 10.4 Potential Finds and Specified Environmental Controls..... 36
 - 10.4.1 Asbestos Containing Materials (ACMs) 36
 - 10.4.2 Construction and Demolition Waste 37
 - 10.4.3 Residual Infrastructure 37
 - 10.5 Aesthetic Considerations 37
 - 10.6 Geotechnical Considerations 38
- 11.0 REFERENCES..... 39
- 12.0 LIMITATIONS OF THIS REPORT 40

APPENDIX A: Figures..... A

TABLES

Table 1: Groundwater Gauging Results..... 12

Table 2: Groundwater Field Quality Results..... 13

Table 3: Environmental Values Selected 16

Table 4: Likelihood Scale 23

Table 5: Consequence Scale 24

Table 6: Risk Rating Matrix 24

Table 7: Management Level 24

Table 8: Environmental Risk Assessment 26

Table 9: Groundwater Management Measures 27

Table 10: Air Quality Management Plan..... 28

Table 11: Noise and Vibration 29

Table 12: Erosion and Sediment Control Plan 30

Table 13: Soil Management Measures 31

Table 14: Site Contamination Management 32

Table 15: Hazardous Materials Management 33

Table 16: Waste Management 34

AGON DOCUMENT CONTROL

| Report Title | | | Project Reference | |
|---|--------|------------------|--|----------|
| Construction Environmental Management Plan Former Buckingham Arms 1 to 9 Walkerville Terrace, Gilberton SA | | | JC1225_CEMP | |
| Written | | | Approved | |
|  Carlo Echevarria Principal Environmental Scientist | | |  Darren Edwards Principal Environmental Scientist | |
| Rev No | Status | Date | Author | Reviewer |
| 01 | Draft | 13 October 2023 | CE | DE |
| 02 | Draft | 15 November 2023 | CE | DE |

| Rev No | Copies | Recipient |
|--------|--------------|---------------------------------------|
| 01 | 1 electronic | Joel Wilkinson - Citify Group Pty Ltd |
| 02 | 1 electronic | Joel Wilkinson - Citify Group Pty Ltd |

1.0 INTRODUCTION

1.1 Background

Citify Group Pty Ltd (Citify) engaged Agon Environmental Pty Ltd (Agon) to develop a Construction Environmental Management Plan (CEMP) for the property identified as the former Buckingham Arms Hotel located at 1 to 9 Walkerville Terrace, Gilberton SA ('the site').

Specifically, this CEMP was developed to support the proposed development of the site for mixed commercial and residential purposes and applies to site activities which will disturb existing building material and underlying site soils inclusive of future building demolition, geotechnical preparation of the site's pavement, foundation installation and service trench excavations.

This CEMP (including the environmental controls proposed for implementation) is subject to the review and approval of the Citify, in-line with any changes to the future Construction Specification ('the Specification') which Agon understands is still yet to be developed.

The location of the site and the approximate bounds of the site are provided in Figure A1 within Appendix A respectively.

1.2 CEMP Objectives

The objectives of this CEMP are to:

- Provide a summary of known environmental site conditions deemed relevant to future construction works; and
- Provide a range of environmental controls to manage potential risks associated with known and unexpected environmental conditions at the site.

The environmental management controls prescribed within this document will serve to inform the development's future Principal Construction Manager (PCM), the expectations and environmental performance criteria required of future construction works.

Agon notes that this document does not serve as a supplementary engineering nor construction specification. Where included, construction or engineering assumptions have been included to provide context to environmental management controls prescribed.

Ultimately, this CEMP serves to maintain the environmental suitability of the site for the proposed development.

1.3 Legislative Framework

This CEMP was developed in accordance with the following:

- AS 2436- 1981: Guide to Noise Control on Construction, Maintenance and Construction Sites;
- Environment Protection Act 1993;
- Environment Protection Policy (Waste-to-Resources) 2010;
- Environment Protection Act 1993;

- How to Safely Remove Asbestos Code of Practice 2020;
- How to Manage and Control Asbestos in the Workplace Code of Practice 2020;
- SA EPA Handbook for Pollution Avoidance on Building Sites 2004;
- National Environment Protection (Ambient Air Quality) Measure 2003;
- National Environment Protection Measure Diesel Vehicle Emissions 2009;
- NEPC (1999) National Environmental Protection Council (2013) National Environment Protection (Assessment of Site Contamination) Measure (NEPM) 1999, Amended 2013;
- Occupational Safety and Health Administration (OSHA) (2020) Air Contaminants;
- South Australia Environmental Protection Authority (SA EPA) 1999 Stormwater Pollution Prevention Code of practice for the building and construction industry;
- SA EPA (2007) Environment Protection (Noise) Policy (EPP);
- SA EPA (2010) Guideline for stockpile management: waste and waste derived products for recycling and reuse;
- SA EPA (2013) Standard for the production and use of Waste Derived Fill, Oct 2013;
- SA EPA (2014) Information Sheet, Construction Noise Updated EPA 425/17 February 2017;
- SA EPA (2015) Environment Protection (Water Quality) Policy;
- SA EPA (2021a) Environmental management of Dewatering During Construction Activities, Publication EPA 1093 (Updated June 2021);
- SA EPA (2021b) CEMP Industry Guideline, Publication EPA 1095 (Updated October 2021);
- SAEPA (2018) Guidelines for the Assessment and Remediation of Site Contamination (revised 2019); and
- Work Health & Safety Act and Regulations 2012.

Reviews of this document may be necessary to remain consistent and compliant with the Specification (i.e., through clarifications, tender addenda) or to Contracted Works (variations) and will be coordinated with the Project Principal.

1.4 Supporting Documents

The environmental management framework provided in this document has relied upon information from the following sources:

- Agon (2022) Preliminary Site Investigation, Buckingham Arms Hotel, 1-9 Walkerville Terrace, Gilberton. Ref: JC1083_PSI.01, dated 22 June 2022; and
- Agon (2023) Due Diligence Environmental Assessment, Buckingham Arms, 1-9 Walkerville Terrace, Gilberton, South Australia. Ref: JC1225_DDEA.02, dated 7 November 2023.

The reports listed above contain the most up to date site-specific data, which is considered representative of the site and are sufficient in characterising likely soil, groundwater and soil vapour environmental characteristics with the bounds of the proposed development area.

1.5 CEMP Structure

This document has been structured into the following sections for ease of implementation during redevelopment works at the site:

- **Section 1: Introduction:**
 - Identification of the site, legislative framework, objectives and structure of the CEMP document.
- **Section 2: Roles and Responsibilities:**
 - Outlines roles and responsibilities to be followed during the construction works.
- **Section 3: Site Description:**
 - A brief description of the site, the proposed construction scope and identification of a range of contaminants.
- **Section 4: Assessment Criteria**
 - A summary of selected soil, groundwater and soil vapour criteria adopted for the site.
- **Section 5: Site Environmental Summary:**
 - A summary of environmental observations and testing undertaken at the site and an overview of the range of contaminants likely to be encountered on the site.
- **Section 6: Induction Training and Awareness Assessment:**
 - A summary of communication and training requirements required by this CEMP.
- **Section 7: Reporting:**
 - A summary of reporting and record keeping requirements.
- **Section 8: Environmental Risk Assessment:**
 - A qualitative assessment of environmental risks associated with project environmental aspects.
- **Section 9: Prescribed Environmental Control Plans:**
 - A suite of prescribed plans describing actions required to mitigate risks associated with expected project environmental aspects.
- **Section 10: Unexpected Finds Protocol:**
 - Outline of other materials that could be encountered on the site during construction works and the appropriate response process if they are detected.
 - Outline a range of management actions depending on a range of possible unexpected finds (should they be identified) discovered.

2.0 ROLES AND RESPONSIBILITIES

This section defines key responsibilities, terms and general specification of requirements for the environmental management of the Project. It complies with the SA EPA's CEMP Industry Guideline 1095/21 requirements for identification of a person or persons with responsibility for implementing the CEMP.

Project Principal – Cify

The Project Principal ('the Principal'), as the custodian, will oversee the construction of the development. The Principal has the responsibility and is accountable for:

- Overall project delivery and meeting all the necessary environmental requirements;
- Driving environmental awareness;
- Delivering a culture of environmental harm minimisation throughout the project team; and
- Reporting environmental incidents to the Environmental Consultant and/or the SA EPA (where or if applicable).

Principal Construction Manager – To Be Engaged

The Principal Construction Manager (PCM) will be responsible for developing and implementing the CEMP as required by the Project Principal and has the responsibility for:

- Ensuring they and their subcontractors, comply with all requirements of the CEMP and their general environmental duty of care under the Environmental Protection Act 1993;
- Communicating these environmental requirements and ensuring that all personnel are aware of their environmental responsibilities and authorities;
- Communication of environmental conditions to the Principal and Environmental Consultant including the discovery and removal of unexpected finds (Section 10) which may be present underneath the site;
- Advising and supporting construction personnel and subcontractors to meet their environmental objectives and comply with all CEMP requirements;
- Verifying that all workers and visitors to the site have been inducted to the environmental requirements of the site;
- Identifying potential or existing problems and initiating appropriate corrective and preventive actions;
- Verifying that environmental corrective and preventive actions have been undertaken in correspondence with Principal's approval;
- Providing all required environmental records and other relevant documents to the Environmental Consultant; and
- Immediately reporting all environmental incidents and unexpected discoveries to the Principal.

Environmental Consultant – Agon Environmental

Agon will provide environmental oversight at the request of the Principal for items not limited to:

- Undertaking prescribed environmental sampling/monitoring programmes (Section 9) as required by the PCM (with approval from the Principal);
- Provide immediate environmental support in the event of an unexpected discovery (Section 10);
- Assistance in resolving environmental-related complaints (where encountered);
- Develop additional environmental management scopes of works or documentation as required by the Project Principal; and
- Provision of a Licensed Asbestos Assessor to undertake all works associated with the assessment, handling and removal of ACMs in particular during building demolition activities. This also includes undertaking of air fibre monitoring (AFM) events and provision of Asbestos Clearance Certificates (ACCs)

All actions performed by the Environmental Consultant will be subject to the Principal's approval. Agon will also undertake the following key tasks (detailed in Section 9.7) to further inform the Principal regarding any environmental management requirements, including any necessary works required to remediate the site or manage any potentially contaminated materials discovered.

All Employees and Subcontractors

All employees (including subcontractors) have an obligation to protect people and the environment through carrying out their own work with due diligence. In particular, they must:

- Comply with environmental project requirements, as identified at the time of induction, as they apply to the type of work they are conducting;
- Be aware of and meet the requirements this CEMP as identified at the time of induction and as they apply to the type of work they are conducting;
- Implement practical ways to control environmental risks as per the PCM's risk management systems; and
- Report any incident that may result in environmental harm that arises in the course of, or in connection with, their work immediately to their supervisor, manager or other nominated representative.

Should major changes to the project management structure occur, an update of this section of the CEMP may be required and roles and responsibilities defined for potential new parties involved.

3.0 SITE DETAILS

3.1 Site Description and Land Use

The site is the premise of the former Buckingham Arms Hotel, is situated within the suburb of Gilberton and is located approximately 2.1 km north of the Adelaide Central Business District (CBD).

The main Buckingham Arms Hotel facilities are located on the corner of Walkerville Terrace and Northcote Terrace with Pokies and an alcohol takeaway Sip'n'Save store at the rear of the building. The original extent of the Buckingham Arms Hotel located in the south-west corner of the site (see Figure A1, Appendix A) and is a listed SA Local Heritage Place. We understand that this portion of the site will be retained and likely refurbished as part of the future development. The remainder of the site is an asphalt sealed carpark servicing the hotel. There is also a bulk warehouse and maintenance shed/warehouse towards the north-west portion of the site.

The site was in operation during Agon's first site visit during 20 June 2022. Hotel, restaurant and retail operations have since ceased and at present the site has been vacated, the site secured with temporary fencing and all infrastructure remaining in place.

3.2 Environmental Site History

An initial PSI undertaken by Agon included the review of historical information which identified the southern portion of the site has historically been associated with the Buckingham Arms Hotel facilities dating back to the 1840's. The remaining northern portion of the site was historically owned by a series of private individuals and comprised numerous residential dwellings dating back prior to the mid 1930's. From the 1950's the site was acquired by private business entities and was progressively redeveloped from the 1950's to the late 2000's into a bituminised carpark servicing the hotel facility.

Agon's PSI identified a range of potentially contaminating activities (PCAs) and associated potential sources of contamination resulting from historical and current land uses of the site which could be considered an environmental encumbrance to the proposed site development. The on-site PCAs previously identified include:

- Potential uncontrolled fill soils underlying the site (including the underlying pavement and foundations of the hotel building and across the rest of the site where former residential properties were located); and
- Hazardous building materials within the fabric of the existing onsite buildings inclusive of asbestos containing materials (ACMs) and lead-bearing paint.

Agon also identified two off-site sources of potential groundwater contamination as part of the review of historical uses of adjacent (<60 m) properties. These properties identified as 2 Walkerville Terrace (approximately 30 m to the south-east of the site) and 5 Northcote Terrace (approximately 25 m southwest of the site) are both considered potential sources of migratory hydrocarbon impacts as a result of historical uses associated with dry cleaning and service station operation respectively.

In support of the finding of the PSI, Agon undertook subsequent scopes of intrusive soil, groundwater and soil vapour assessments within site bounds. These investigations included the collection and analysis of soil samples from 37 soil bores, groundwater samples from 3 well locations and soil vapour samples from 4 soil

vapour wells on-site to establish whether former on and off-site PCAs may have adversely impacted the site (Agon, 2023).

Agon's investigation was also supplemented by limited scope of works conducted by AME Consulting (AME) who conducted a soil validation assessment and limited soil vapour assessment works. Collectively, these investigations formed part of the previous DDEA scope (Agon, 2023) and concluded:

- Soils underneath the site are composed of granular fill to a depth 0.6 meters below ground surface (mbgs) which is underlain by a range of clays where groundwater has been identified to occur. Excluding some non-soil inclusions in fill, underlying soils generally did not present olfactory nor other visual evidence of contamination;
- Laboratory analysis of soils for a range of site-specific potential contaminants of concern (PCOCs) did not report chemical concentrations which would constitute site contamination. Detected concentrations were limited to a range of heavy metals, total recoverable hydrocarbons (TRH), polycyclic aromatic hydrocarbon (PAHs) and organochlorine pesticide compounds (OCPs) at levels which does not indicate the presence of a human health or ecological risk in the context of a future residential use;
- Localised fill at former borehole A-BH01 which was previously identified with elevated benzo(a)pyrene concentrations at a depth of 0.3-0.4 m has since been excavated with resultant soils, temporarily stockpiled on-site awaiting future off-site disposal. These soils are currently being re-assessed by Agon to formalise soil waste classification and facilitate proposed off-site disposal. Results of the soil waste classification will be provided under separate cover;
- In similar nature to soils, groundwater samples collected from the three wells onsite were generally not reported with groundwater contaminant concentrations in excess of the adopted criteria. Elevated boron, manganese and selenium concentrations identified within on-site wells and has been demonstrated to be attributable to background sources rather than on-site activities and is not considered a form of contamination.
- Soil vapour samples collected and analysed as part of the previous DDEA (Agon, 2023) were reported to contain minor concentrations of VOCs in the site's subsurface. Whilst the exact nature of these soil vapour concentrations could not be ascertained the reported VOC concentrations are below the adopted criteria and do not indicate an unacceptable risk to human health noting:
 - VOCs were not identified in soils; and
 - groundwater - confirmed via following a second round of sampling,

Furthermore, the potential of unacceptable risk from vapour from the identified potential off-site sites namely the former dry clears to the east and former service station to the south-west is considered to be low, noting:

- Contamination consistent with service stations or drycleaners was not identified in onsite groundwater; and
- Both the former dry cleaner and service station sites are located down inferred hydraulic gradient from the site.

Overall, the data collected to date does not suggest that there exists an environmental condition within onsite underlying soil, groundwater and soil vapour media that would preclude the development of the site for residential purposes.

3.3 Site Specific Geology

Based on the previous soil observations, the following geological conditions have been identified underneath the site:

- Fill was present underneath the site in the form of yellow gravelly sand sub-grade to an average depth of 0.3 mbgs which was underlain by pale red to brown clayey sand fill with non-soil inclusions including ash, cinders and brick fragments to depths up to 0.7 mbgs. No inclusions of ACMs were identified within fill soil;
- This was underlain by natural soils in the form of pale brown clayey sands and sandy clays with intermittent bands of gravel to the maximum investigative depth of 15 mbgs;
- Groundwater was encountered at an approximate depth of 12 mbgs and occurs within a primarily clay lithology with minor sand and gravel lenses;

Outside of the non-soil inclusions identified within fill, other visual nor olfactory evidence for soil contamination was not identified within remaining fill or any natural soils.

The geological profile observed beneath the site is consistent with published geology.

3.4 Site Specific Hydrogeology

Hydrological conditions underlying the site were collected during the previous groundwater sampling events are provided in the following subsections.

3.4.1 Groundwater Gauging Data

Groundwater gauging data collected during the previous groundwater assessment period have been summarised as follows:

- Non-aqueous phase liquids (NAPL) were not observed during previous gauging, purging and development activities undertaken at each well during groundwater development and sampling activities (during either phase of groundwater sampling);
- The latest depth to standing water levels (SWLs) and calculated groundwater elevations across the area of investigation were measured as shown in Table 1 below:

Table 1: Groundwater Gauging Results

| Monitoring Well | Measured SWL (mbtoc*) | Groundwater Elevations (mAHD) | Inferred Hydraulic Location |
|-----------------|-----------------------|-------------------------------|-------------------------------|
| MW01 | 12.201 | 23.434 | Down to up hydraulic gradient |
| MW02 | 12.148 | 23.698 | Up hydraulic gradient |
| MW03 | 12.173 | 23.409 | Down hydraulic gradient |

*mbtoc = metres below top of casing

3.4.2 Inferred Groundwater Flow

Groundwater flow characteristics inferred during the previous investigation have been summarised as follows:

- Agon has adopted the following published groundwater parameters (Domenico and Schwarz, 1998) based on a clayey aquifer horizon:
 - A hydraulic conductivity (K) range of 1×10^{-4} to 1×10^{-5} m/day; and
 - An average effective porosity of 10%.
- The groundwater gradient beneath the site was previously calculated as 4.2×10^{-3} m/m towards the south, south-west.

Based on the above groundwater parameters, the groundwater seepage velocity calculated beneath the site is approximately between 1.5×10^{-4} to 1.5×10^{-3} m/year towards the south, south-east towards the River Torrens. This result was expected noting the low transmissivity of clay dominated aquifers.

3.4.3 Field Groundwater Quality

The latest on-site field groundwater quality data have been previously summarised as per Table 2 below:

Table 2: Groundwater Field Quality Results

| Monitoring Well | Dissolved oxygen (DO) | Redox Potential (Eh) | Electrical conductivity (EC) | pH Values | Temperature |
|-----------------|-----------------------|----------------------|------------------------------|-----------|-------------|
| MW01 | 4.28 | 151.7 mV | 3,918 ug/cm | 8.26 | 18.6°C |
| MW02 | 5.01 | 54.3 mV | 3,963 ug/cm | 8.06 | 19.3°C |
| MW03 | 5.41 | 115.5 mV | 3,458 ug/cm | 7.58 | 19.3°C |

Evidence for the presence of contamination in groundwater, such as odours and discoloration, were not observed during the previous groundwater sampling event (Agon, 2023).

3.5 Proposed Scope of Civil works

Based on the information obtained to date and Agon’s understanding of the future development programmes, the following civil works are likely to be undertaken at the site:

- Demolition of the non-heritage portions of the former hotel complex building currently on-site;
- Development of the site’s pavement including geotechnical preparation;
- Construction of footings to support the future site buildings; and
- Installation of underground services inclusive of the excavation of service line trenches and pits.

The above civil scope excludes the management of unexpected finds, the details of which have been provided in Section 10.

4.0 ASSESSMENT CRITERIA

The following chemical screening criteria have been adopted by Agon in-line with the site's proposed residential use with recreational landscaped features. These criteria have been selected to provide the PCM with a soil, groundwater and soil vapour assessment framework to be utilised as part of a prescribed range of sampling programmes outlined in Section 9 specific to:

- Establishment of on-site reuse suitability of soil materials with visual/olfactory evidence of contamination and/or soils with conditions not previously observed (i.e., from an unexpected find);
- Importation of soils from a non-quarry source to achieve site level; and
- Activities which may require access to groundwater. This will be limited to the installation of deep piles should it be considered as part of future building design (if required).

The screening assessment criteria described below are for comparative purposes only and should not be regarded as "clean-up" levels. Where concentrations of a targeted contaminants exceed the adopted assessment criteria, the PCM will be required to undertake management actions as prescribed in Section 9.7.

4.1 Soil Screening Criteria

4.1.1 Human Health Screening Criteria

The results of future soil assessments (should it be required) will be subject to the following soil screening criteria established as part of the previous DDEA (Agon, 2023):

- ASC NEPM (NEPC 2013) Health Investigation Levels (HILs) B (residential land use without access to site soils); and
- ASC NEPM (NEPC 2013) Health Investigation Levels (HILs) C (Recreational land use);

Discussion of results during previous works have also been assessed against the ASC NEPM Health Screening Levels (HSLs) for vapour intrusion for further evaluation of potential risks to human health resulting from intrusion of hydrocarbon vapours emanating from on-site soil impacts. HSLs have been adopted based on potential receptors, subsurface lithology and depth of impacts to soil.

In addition, to assess the top 2 metres of soil for potential risks associated with dermal contact with petroleum hydrocarbons and vapour intrusion for maintenance workers, the CRC CARE (2011) direct contact and vapour intrusion HSLs have been adopted. It is considered likely that both current and future site workers have a high likelihood of exposure to shallow soils (up to 2.0 m in depth) through the installation or maintenance of structures such as underground utilities, associated trenches and footings. To assess the top 2 metres of soils for potential effects of petroleum hydrocarbons, the ASC NEPM (2013) Management Limits for TRH have also been considered following application of ESLs and HSLs.

4.1.2 Ecological Screening Criteria

In consideration of minor landscaping works proposed for the site, Agon has adopted the ASC NEPM (NEPC 2013) generic Ecological Investigation Levels (EILs) and Ecological Screening Levels (ESLs) both of which are relevant only to soils that will be within 2 m of the surface. In-line with the sites current and future proposed use, the residential criteria have been adopted.

Please note that Agon has not undertaken additional laboratory analysis to determine site-specific EILs. As previously determined, landscaping forms a minor proportion of the site and establishment of sensitive ecological areas have not been considered as part of the future development. In this regard conservative assumptions (low CEC, neutral soil pH) have been assumed to establish generic EILs.

4.2 Soil Waste Disposal

For the purposes of establishing off-site soil disposal classification, the following criteria will apply:

- SA EPA (2010) Waste Disposal Information Sheet: Current criteria for the classification of waste – including Industrial and Commercial Waste (Listed) and Waste Soil; and
- SA EPA (2013) Standard for the production and use of Waste Derived Fill (WDF)

Agon also notes that soils to be imported to the site (if required) will need to meet the SA EPA 2013 criteria unless it is sourced from virgin quarry materials. Please note that as a site requirement, soils (should they be disposed off-site) are to be free of asbestos otherwise the SA EPA disposal criteria may include the asbestos contamination classification.

4.2.1 Aesthetic Considerations

The following physical and aesthetic screening criteria (based on the SA EPA and ASC NEPM 2013) are recommended for application at the site primarily for soils which are to be rehabilitated or imported for on-site use to achieve site levels:

- Rehabilitated and/or imported materials should consist of clay, rock, sand, soil or other inert mineralogical matter (as per the SA EPA's definition of soil) with aggregate sizes less than 100 mm;
- The combined concentration of natural and foreign inclusions in soils is recommended not to exceed 2% v/v; and
- Soil staining or odorous condition should not be present.

Agon understands that non-soil inclusions are currently present within underlying fill soils. Considering that the majority of site soils will likely be under a hardstand or overlain with subgrade, aesthetic condition of soils is unlikely to present a detriment to future visual aesthetics. The use of site derived soils with inclusions in excess of 2% v/v will be left at the discretion of the Principal (assuming that the material also meets geotechnical requirements).

4.3 Groundwater Screening Criteria

The SA EPA Guidelines for Contaminated Site Assessment and Remediation (the "GAR", October 2018 and amended in November 2019) is used to describe the legislative and policy approach to risk-based assessment and remediation of site contamination in South Australia.

This guideline supports the Objects of the *Environment Protection Act 1993* and provides information to assist consultants and auditors to adopt a consistent and compliant interpretation of relevant legislation, policy and guidance. This guideline also provides information to ensure the assessment and remediation of site contamination is conducted to an appropriate standard in South Australia.

In order to establish whether there is actual or potential harm to groundwater (that is not trivial) exists, the GAR requires site-specific environmental values (EVs) to be established. These EVs have been previously established by Agon’s PSI which have been applied below:

Table 3: Environmental Values Selected

| Environmental Value | Adopted Criteria |
|-------------------------------|-------------------------------------|
| Recreation and Aesthetics | GMRRW – NHRMC (2011) and WHO (2017) |
| Aquatic Freshwater Ecosystems | ANZG (2022) |

4.3.1 Recreation and Aesthetics Criteria

The following should be noted regarding the selected recreational groundwater criteria:

- Both the NHMRC 2011 (where it supersedes the ANZECC 2000 criteria) and the ANZECC 2000 (where NHMRC 2008 criteria are not available) have been the main source of Primary Contact Recreation criteria; and
- The GAR specifies primary contact recreation uses and objectives using the NHMRC published values (NHMRC Guidelines for Managing Risks in Recreational Groundwater 2011 (NHMRC, 2011)) which in turn are derived from NHMRC 2004 Australian Drinking Water Drinking Guidelines (ADWG 2004) which since been superseded in 2022 (ADWG 2022).

Criteria have therefore been derived from NHMRC 2011, the values of which have been based on ADWG 2022 health-based drinking water and aesthetic criteria.

4.3.2 Aquatic Freshwater Ecosystems

In accordance with the ANZG, the River Torrens is considered a highly disturbed environment (noting its function for stormwater detention and treatment). However, noting its heritage and perceived environmental value, Agon has selected an 95% protective value of freshwater receptors.

In addition to the above EV, Agon has adopted the ASC NEPM Groundwater HSL for residential land use (A) to appraise potential hydrocarbon detections within underlying aquifer.

4.4 Soil Vapour Screening Criteria

The soil vapour screening criteria adopted was established as part of the DDEA (Agon, 2023)

- ASC NEPM Interim soil vapour health investigation levels (interim HILs), Residential B
- ASC NEPM HSL level A/B (residential) for vapour intrusion; and
- US EPA Vapor Intrusion Screening Level (VISL) in the absence of other standards.

Please note that soil vapour assessments are only likely to be undertaken subject to the nature of unexpected finds. Previous soil vapour assessments on-site have not identified a condition which would preclude the use of the site for a mixed commercial and residential purposes.

5.0 SITE ENVIRONMENTAL SUMMARY

5.1 Environmental Soil Conditions

The following site soil condition were identified in the subsurface as part of previous investigations:

- Soils underneath the site are composed granular fill occasionally containing brick, concrete and other wastes to an average depth of 0.6 mbgs which is underlain by a range of clay lithologies horizon where groundwater has been identified to occur. Fill and natural soils generally did not present evidence of contamination. Whilst field screening for VOCs identified elevated readings, laboratory testing has demonstrated that these field readings are not associated with volatile contaminants;
- Concentrations of soil analytes above the laboratory limit of reporting (LOR) were limited to a range of heavy metals (on every soil sample previously analysed) and a range of TRH, PAH and OCPs;
- The majority of the previously reported soil chemical concentrations were below the adopted human health or ecological screening criteria with the exception of sample A-BH01_0.3-0.4 collected from fill;
- Former sample A-BH01_0.3-0.4 was reported to contain concentrations of benzo(a)pyrene (BaP) TEQ of 8.9 mg/kg exceeding ASC NEMP HIL B criteria (4 mg/kg) and concentrations of b(a)P of 6.0 mg/kg exceeding the adopted ASC NEPM ESL criterion (1.4 mg/kg). Underlying soil sample (A_BH01_0.7-0.8) reported detectable concentrations of Bap TEQ below the HIL B criterion of 4 mg/kg. This result vertically delineates the elevated concentrations of PAHs to within the fill horizon;
- Fill soils associated with this localised area of BaP have since been excavated and temporarily stockpiled on-site as part of AME's soil validation scope. To date, this stockpile remains within site bounds (pending future formal classification and disposal). These soils are currently being re-assessed by Agon to formalise soil waste classification and facilitate proposed off-site disposal. Results of the soil waste classification will be provided under separate cover; and
- Concentrations of other target contaminants inclusive of BTEX, VOCs, VHCs and OPPs were not reported above the laboratory LOR. Please note, VHC and VOC analysis of soils were undertaken within samples with elevated field screening results. None of these samples were reported with VOC or VHC concentrations in excess of the laboratory LOR providing further lines of evidence that intrusive soil vapours were not present in the subsurface.

In general, the reported chemical concentrations of underlying site soils suggest that known on and off-site PCA's have not significantly impacted the site. Furthermore, site soils as a single body of waste (exclusive of the hot spot area around A_BH01 which has previously been excavated and stockpiled on-site) were deemed chemically suitable for Waste Fill disposal.

5.2 Environmental Groundwater Conditions

The following site groundwater condition were identified as part of previous investigations:

- Groundwater beneath the site occurs in a largely clay lithology approximately 12 meters below current site levels. The calculated direction of local groundwater flow is inferred toward the south, south-east towards the River Torrens;
- In similar nature to soils, groundwater samples collected from the three wells onsite (MW01 to MW03, see Figure A1, Appendix A) were generally not reported with groundwater contaminant

concentrations in excess of the adopted criteria. Boron, and manganese concentrations which were reported at concentrations above the adopted water quality screening criteria has been demonstrated to be attributable to background sources rather than on-site activities and is not considered contamination;

- Furthermore, evidence for the presence of hydrocarbon-based impacts (including in the form of intrusive vapours) as a result of former dry cleaning and service station activities off-site have not been identified noting:
 - Groundwater analytical results were not reported with concentrations of dissolved hydrocarbons (inclusive of volatile fractions) which would suggest that groundwater from either potential sources of off-site impacts have migrated within site bounds;
 - Both the former dry cleaner and service station sites are located down the inferred hydraulic gradient from the site; and
 - Overall, there was no evidence to suggest that there exists an environmental condition within underlying soil, groundwater media that would preclude the development of the site to future residential use.

5.3 Environmental Soil Vapour Conditions

Agon's soil vapour assessment reported the presence of residual VOC concentrations in the subsurface. These VOC concentrations comprised a range of compounds including toluene, ethylbenzene, xylenes, naphthalene, styrene, bromodichloromethane, chlorodibromomethane, chloroform, tetrachloroethene, 1-methyl-4 ethyl benzene, 1,2,4-trimethylbenzene, 1,3,5-trimethylbenzene, styrene, propanol, ethanol, heptane and acetone. These VOC concentrations were largely residential in nature and were below available screening criteria hence does not pose an unacceptable risk to on-site receptors.

Considering that an onsite soil nor on or offsite groundwater source of these vapours were not previously identified, these vapours (which are solely within underlying soil pore space) are likely to attenuate overtime and disperse once the site's future geotechnical pavement is constructed.

6.0 INDUCTION, TRAINING AND AWEARNESS

6.1 Training

The following shall apply regarding future employee and subcontractor training, awareness and competency at the site:

- All employees and subcontractors shall receive suitable environmental induction/training to ensure that they are aware of their responsibilities and are competent to carry out the works;
- Persons performing tasks which have the potential to cause significant environmental impact shall have sufficient competency or accreditation based on an appropriate level of education, training and experience;
- Environmental requirements shall be explained to employees during site induction, and on-going training via toolbox meetings, pre-starts, briefings, notifications and other communication forums; and
- All training and toolbox meetings shall be recorded, and the records maintained by the PCM

6.2 Induction

All employees (including any subcontractors) will receive induction/training that includes, but is not limited to:

- Environmental policies established by the PCM;
- Site environmental objectives and targets;
- Individual authorities and responsibilities;
- Site environmental rules established by the PCM;
- Emergency procedures and response (e.g., spill clean-up);
- Legal obligations;
- Detailed requirements/ obligations required of personnel to ensure high risk environmental aspects are effectively managed;
- Specific environmental commitments and obligations of personnel on-site; and
- Specific on-site controls for the protection of cultural and environmental values (e.g., tagged ownership of physical barriers established to protect on-site environmental values).

All employees and subcontractors will be required to sign the Site Induction Register. The Site Induction Register and records of inductions will be retained by the PCM.

All visitors are required to attend a visitor's induction prior to entering the workplace and/or Site. Where relevant, environmental issues, risks and management controls should be included in the visitor induction. Visitors are to be escorted by an inducted person at all times whilst on site or in the workplace. The Site Office will retain a Visitors Logbook, which is to be signed by all visitors upon entry and exit from site.

6.3 Safety/Toolbox

Environmental and Safety 'Toolbox' meetings will be conducted each morning as activities and weather conditions change continuously on site. The toolbox meetings should include discussion on how the changes may impact safety risks. Environmental and human health considerations should be part of periodic meetings and planning sessions (i.e., daily pre-start meetings, weekly toolbox sessions).

Topics for toolbox talks may include but not limited to:

- Environmental and human health topics;
- Project Manager directions;
- Verify specific requirements for permits, licences, approvals and contractual conditions prior to the start of work activities;
- Site visitors;
- Changes in Plant, vehicle, equipment;
- Changes in site ground conditions;
- Environmental monitoring and laboratory testing results (where required);
- Refuelling plant and machinery and spill response procedures;
- New precautions to prevent sediment-laden run-off reaching stormwater;
- Waste management and tracking requirements;
- Noise complaints;
- Dust control;
- Unexpected find management should one be identified; and
- Environmental non-conformances.

The Toolbox Meeting Record will be used to record and register agenda, content and attendees and copies must be retained by the PCM.

7.0 REPORTING

The following complies with the communication and complaint resolution requirements of the SA EPA's CEMP Industry Guideline 1095/21.

7.1 Incidents and Complaints

When an environmental incident or complaint occurs, appropriate action shall be undertaken immediately to address the complaint and/or minimise further impact.

Corrective action is to be implemented, and an assessment conducted to determine what preventative action can be taken to prevent a similar incident from occurring again.

All environmental incidents and complaints are to be reported by the PCM to the Superintendent and Environmental Consultant as soon as possible via an incident report and in accordance with the reporting requirements established in the Specification.

The incident report is to include (at minimum):

- The name and address of any complainant;
- The time and date the complaint was received;
- A description of the complaint;
- The activity/ activities and any associated equipment that gave rise to the complaint;
- The action that was taken to resolve the issues that led to the complaint; and
- The date the complaint was resolved and documentation of complainant's level of satisfaction with the actions to resolve the issue.

All environmental complaints and incidents shall be reported within 24 hrs to the Principal and investigated in line with the WHS requirements of the Specification. Actions will be implemented as soon as possible.

All incident reports shall be filed in a complaint/incident register to be kept on, or is readily accessible from, the site.

7.2 Environmental Inspections

Non-conformance or corrective actions detected during monitoring tasks shall be reported within 24 hrs to the PCM.

The PCM's responses to non-conformance or corrective actions will be recorded on the form and reported to management.

7.3 Non-Conformances and Corrective Actions

Non-conformance or corrective actions detected during monitoring tasks such as site inspections and regular internal or external audits shall be reported within 24 hrs to PCM via a Non-Conformance and Corrective Action Request form.

The PCM's responses to non-conformance or corrective actions will be recorded on the form and reported to management.

7.4 Document Control

Documentation resulting under this CEMP including, but not limited to, correspondence (both incoming and outgoing), reports, licenses / permits and receipts / certificates, are to be filed and easily retrievable. Documentation, particularly reports, must provide details of revision/ version numbers to avoid confusion and to ensure the appropriate version is used.

A formal register for updating the CEMP will be maintained. All references made to the CEMP in written form must also reference the revision/ version number. Similarly, any further control plans developed under the CEMP, in addition to the Environmental Control Plans (ECPs) detailed in Section 9, should also be recorded on the register with reference to revision/ version number.

7.5 Emergency Response

The PCM must have an Emergency Response Plan for the accounting and management of personnel during emergencies and managing the emergency to minimise risk to personnel, plant, the public and the environment. The Emergency Response Plan shall contain as a minimum:

- Emergency procedures;
- Emergency contact names and phone numbers, both internal and external;
- Emergency preparedness checklist;
- Emergency assembly areas;
- Emergency site plan;
- Responsibilities before / after an emergency; and
- Immediate actions in response to specific threats (fire, spill, bomb threat, power failure etc.).

7.6 Emergency Procedures

The Emergency Response Plan shall identify likely and potential emergency situations for the site and procedures to minimise the likelihood of those events occurring. The procedures should also provide direction for personnel on how to react in an emergency, including:

- Account for all site personnel;
- Remove site personnel from danger to assembly areas;
- Contact emergency services;
- Contact all surrounding neighbours and more remote sensitive locations (e.g., kindergartens, schools, elderly communities which could be affected);
- Contact environmental authorities where required;
- Mitigate the possible environmental impacts of emergency situations; and
- Deal with specific emergencies likely to occur at the site (e.g., product spills).

8.0 ENVIRONMENTAL RISK ASSESSMENT

8.1 Environmental Aspects

This document addresses environmental aspects routinely mandated as part of standard construction practices. The environmental management and monitoring aspects prescribed in this document include workplace health and safety, groundwater management, air quality, noise and vibration, surface water, erosion, sediment, site contamination, hazardous material and waste. These are the minimum aspects prescribed within the SA EPA’s CEMP Industry Guideline 1095/21.

Agon have also taken consideration of unexpected finds (Section 10).

8.2 Environmental Aspects

Environmental risks associated with impact events, which could occur in association with each of the nine project aspects, have been assessed using a qualitative (or semi- quantitative) approach where numerical values are assigned to both the likelihood and consequence of an impact event, where:

Likelihood

- The approximate probability of an environmental impact event occurring estimated on a scale of 1 to 5 (Table 4).

Consequence

- The approximate level of environmental impact which would result if the event did occur estimated on a scale of 1 to 5 (Table 5).

The consequence and likelihood ratings are then plotted on the Risk Rating Matrix (Table 6). The higher the risk score, the higher the priority the identified issue is; the lower the risk score the lower the priority for management.

Table 7 describes the level of management and possible actions required for each risk assessment rating.

An assessment of the risk associated with each aspect and a summary of measures to address these key risks are presented in Table 8 **Error! Reference source not found.**. A more detailed description of a framework of actions required to mitigate these risks identified are in prescribed Environmental Control Plans (ECPs) presented in Section 9.

Table 4: Likelihood Scale

| Rating | Descriptor | Likelihood of the Hazard |
|--------|----------------|--|
| 5 | Almost Certain | The event is expected to occur in most circumstances |
| 4 | Likely | The event will probably occur in most circumstances |
| 3 | Possible | The event might occur at sometime |
| 2 | Unlikely | The event could occur at sometime |
| 1 | Rare | The event may only occur in exceptional circumstances |

Table 5: Consequence Scale

| Rating | Descriptor | Definition |
|--------|----------------------|-----------------------------------|
| 5 | Catastrophic | High degree of environmental harm |
| 4 | Major | Substantial environmental harm |
| 3 | Moderate | Moderate environmental harm |
| 2 | Minor | Insignificant environmental harm |
| 1 | Insignificant | No environmental harm |

Table 6: Risk Rating Matrix

| Likelihood | Consequence | | | | |
|---------------------------|------------------|---------------|--------------|-------------|-------------------|
| | Catastrophic (5) | Major (4) | Moderate (3) | Minor (2) | Insignificant (1) |
| Almost certain (5) | Extreme 25 | Extreme 20 | High 15 | High 10 | Low 5 |
| Likely (4) | Extreme 20 | Extreme 16 | High 12 | Medium 8 | Low 4 |
| Possible (3) | High 15 | High 12 | Medium 9 | Medium 6 | Low 3 |
| Unlikely (2) | High 10 | Medium 8 | Medium 6 | Low 4 | Low 2 |
| Rare (1) | Medium 5 | Low 4 | Low 3 | Low 2 | Low 1 |

Table 7: Management Level

| Risk Rating Description | Risk Rating Number | Indicative Management Action |
|-------------------------|--------------------|--|
| Extreme | 16-25 | Immediate action required, senior management should be involved |
| High | 10 -15 | Senior management attention needed and management responsibilities specified for further action |
| Medium | 5-9 | Manage by specific monitoring or response procedures, develop more detailed actions as resources allow |
| Low | 1-5 | Manage by routine procedures, unlikely to need specific application or resources |

8.3 Risk Assessment

A risk assessment was undertaken to identify risks associated with the identified environmental aspects and determine associated risk ratings using the Risk Assessment Method described above.

Table 8 summarises the potential risks to the environment in relation to the nine specific environmental aspects which are described in more detail are described in more detail in Section 9.

Note: The Residual Risk rating in Table 8 was calculated by re-assessing the likelihood and consequence of each aspect/impact subject to the implementation of the management actions identified in the Environmental Control Plans documented in Section 9.



Table 8: Environmental Risk Assessment

| Environmental Aspects | | Potential Environmental Consequences | Initial Risk Rating | Summary of Qualitative Risk Assessment and Management Action (specified in Section 9) | Residual Risk Rating |
|-----------------------|---|--|-------------------------------|--|----------------------------|
| 1 | Workplace Health & Safety | Injury of loss of life to site workers and site visitors. Spread of disease. | 15 – High (5 x 3) | Strict adherence to the site safety management system (under the direction of the PCM) will be required to mitigate Health and Safety Risks associated with construction hazards including the operation of earth moving equipment. Site safety management systems will adhere to COVID-19 prevention measures as stipulated by government guidelines. | 5 – Low (5 x 1) |
| 2 | Groundwater Management | Potential for contamination of underground waters. Potential exposure to existing dissolved groundwater chemicals. | 15 – High (5 x 3) | It is the intent of the CEMP to maintain the relatively sound condition of underlying groundwater and mitigate the introduction of contaminants into the subsurface as a result of future construction activities. Groundwater, in the context of this CEMP, may be affected through deep piling should it be required. | 2 – Low (1 x 2) |
| 3 | Air Quality (Dust and Odour) | Nuisance and potential health impacts to onsite workers and the nearby community (including residential properties and schools). | 15 – High (5 x 3) | Noting the loose nature of exposed soils across the site and without strict dust management, it is almost certain that there will be high level consequences from dust generated by construction works particularly during soil works (i.e., during bulk excavations) and even more so during inclement weather. Appropriate monitoring of dust levels is recommended during construction works to mitigate potential nuisance and potential health impacts on site workers and the nearby community from dust exposure. An Air Fibre Monitoring (AFM) programme will be implemented during activities which may disturb ACMs or should it be discovered as part of an unexpected find (Section 10). | 5 – Low (4 x 1) |
| 4 | Noise and Vibration | Reduction in amenity to adjoining community. | 3 – Low (3 x 1) | The existing ambient noise levels and vibration are expected to be dominated by ongoing site construction, road and internal vehicle traffic. Agon notes that the site is surrounded by a combination of residential and commercial allotments so noise and vibration must be taken into consideration. For this reason, noise and vibration management measures have been suggested by Agon to the satisfaction of the zoning requirements. | 3 – Low (3 x 1) |
| 5 | Surface Water, Erosion & Sediment | Unacceptable levels sediment in stormwater leaving the site. | 9 – Medium (3 x 3) | There is the potential for sediment-laden runoff to leave the site in stormwater flows during construction and discharge into the local stormwater infrastructure. An Erosion and Sediment Control Plan is required by the Specification which will include controls such as the use of silt traps, road sweepers, cattle grids and other sediment control infrastructure. | 3 – Low (3 x 1) |
| 6 | Soil Management (including potentially hazardous soil) | Exposure to potentially hazardous substances within soil media. | 9 – Medium (3 x 3) | Previous site investigations have identified elevated concentrations of PAHs in site soils which could affect its waste disposal classification. There is also potential for further environmental impacts to be discovered as part of an unexpected find. To mitigate potential risks associated with future environmental-related discoveries, an unexpected finds protocol has been developed in Section 10. | 2 – Low (2 x 1) |
| 7 | Site Contamination Management | Harm to human health and/ or the environment from residual site contamination. | 8 – Medium (4 x 2) | Contamination in the context of human-health has not been identified within underlying soil media. This CEMP aims to maintain this relatively sound condition. In the case of future discoveries of potential environmental impacts, an unexpected finds protocol has been recommended to be included in future environmental control plans developed in Section 10. | 3 – Low (3 x 1) |
| 8 | Hazardous Materials Management | Harm to human health and/ or the environment from exposure to hazardous materials. | 12 – High (4 x 3) | Measures are required to control handling and disposal of hazardous materials if identified. These Hazardous materials in the context of this CEMP are a range of potential unexpected finds (Section 10) including but not limited to ACMs, lead-bearing paint, soils with aesthetic impacts and residual site infrastructure. | 4 – Low (4 x 1) |
| 9 | Waste Management | Harm to human health and/ or the environment from exposure to waste. | 9 – Medium (3 x 3) | Measures are required to control handling and disposal of general wastes which may be generated during the construction process. These have been developed in Section 9. | 3 – Low (3 x 1) |

9.0 ENVIRONMENTAL CONTROL PLANS

9.1 Workplace Health and Safety

All work is to be conducted in accordance with legislative requirements and any specifications outlined in the Civil Works Specification, including measures to protect people and property as required under the general conditions of contract (AS4000-1997). These measures will include establishment of an appropriate perimeter fence and gates to restrict access to the site and ensure public safety. All site workers and visitors have a duty of care for workplace health and safety. The PCM will be responsible for ensuring and verifying that all works are carried out in accordance with legislative requirements and any specifications outlined in the Civil Works Specification.

9.2 Groundwater Management

Groundwater at the site may be impacted by the following:

- Spills and leaks from chemicals introduced at the site during construction activities such as fuels and lubricants (from plant or temporary chemical stores); and
- From the ingress of contaminant-laden stormwater from on and off-site sources.

The PCM is required to comply with the following groundwater management measures to outline actions to mitigate and manage risks to and from underlying groundwater quality as follows.

Table 9: Groundwater Management Measures

| Groundwater Quality | Description |
|---|---|
| Objectives | To avoid introducing additional chemical compounds into underlying groundwater above established background or ambient conditions. |
| Performance Criteria | No recorded gross releases of chemicals which may immediately threaten groundwater. A gross release will be defined as product spills more than 10 L into site soil and any product release directly into groundwater. No releases of untreated groundwater into the local stormwater and/or marine environment. |
| Management Actions | All site workers involved with construction activities are to be inducted by the PCM, including discussion of the environmental condition of the site. Chemicals to be introduced by the PCM into the site should be contained in approved vessels and recorded within a chemical register. Construction activities are to be compliant with Sediment Control Plans. The PCM will have chemical spill kits available for use on-site. The PCM must advise/contact the Principal if visual or olfactory observations indicate the potential presence of additional contamination at a particular location. |
| Monitoring & Reporting | PCM to engage the Environmental Consultant to immediately test underlying soils following product releases which may threaten the current condition of groundwater. Should soils tests provide sufficient evidence to suggest an environmental threat to groundwater, a suitable groundwater sampling programme will be established to identify the extent and severity. PCM to engage to the Environmental Consultant to conduct treated water testing should stormwater discharge options be required. |
| Corrective Actions | Spills and leaks will be immediately contained and reported as an incident. |
| Relevant Legislation, Guidelines & Standards | Environment Protection Act 1993 SA EPA 2015 Environment Protection (Water Quality) Policy. SAEPA (2019) Guidelines for the Assessment and Remediation of Site Contamination (revised 2019) |

9.3 Air Quality

Air quality at the site may be impacted by the following:

- Vapours and odours emanating from any containment losses associated with potential chemicals (i.e., fuels) to be introduced at the site;
- Vapours and odours in the form of exhaust fumes from future site plant; and
- Dust generated from general construction activities with the most likely from the disturbance and movement of site soil materials.

Prescribed actions to mitigate and manage risks to air quality are summarised in Table 10.

Table 10: Air Quality Management Plan

| Air Quality and Emissions | Description |
|-----------------------------|--|
| Objectives | <p>To control, minimise or avoid impacts caused by vapours, odours and dust during construction works.</p> <p>To comply with legislative and contractual requirements and ensure construction activities do not cause nuisance external to the site.</p> |
| Performance Criteria | <p>Visually acceptable levels of airborne dust.</p> <p>No internal and/or external complaints concerning odours and dust.</p> <p>Agon recommends a quantitative air sampling programme be undertaken to meet the following SA EPP ‘ground level’ dust criteria (should dust be determined as critical aspect of expected adverse site conditions):</p> <ul style="list-style-type: none"> • 50 ug/m³ based on 24-hour equivalent exposure to PM₁₀; • 25 ug/m³ based on 24-hour equivalent exposure to PM_{2.5}; and • 8 ug/m³ based on 12-month equivalent exposure to PM_{2.5}. <p>For the purposes of this CEMP, the 24-hour exposure criteria have been selected as appropriate noting the expected period of proposed bulks soil excavation and removal activities.</p> <p>Agon notes the proximity of the site to existing residential properties and dust (without any management controls in place) may be a source of community complaint(s).</p> |
| Management Actions | <p>With regards to vapours and odours:</p> <p>Chemicals to be introduced by the PCM into the site should be contained in approved vessels and recorded within a chemical register. Chemicals on-site must be collected and disposed by appropriately licensed subcontractors at the cessation of construction activities.</p> <p>Ensure all plant and equipment are regularly serviced and well maintained to reduce potential odour which may emanate from exhausts and leaks.</p> <p>Should odorous soils be identified excavated material should be placed in covered stockpiles to prevent the escape of odours.</p> <p>Odour suppressant agent should be available at the site for immediate use should odorous soils require to be temporarily stockpiled prior to off-site disposal.</p> <p>With regards to dust (including air fibre) generation:</p> <p>Use of dust barriers such as shade cloth or concrete barriers (with gawk screens) along the site perimeter.</p> <p>Suspension of dust generating activities during dry and windy conditions.</p> <p>Application of dust suppression techniques over exposed soils. This may include spraying with water (through both a boundary and internal irrigation/sprinkler system) or stabilisation solution and application of dust covers such as a geofabric.</p> <p>Reduce or mitigate stockpiling of dust generating materials (i.e., concrete) by immediately loading surplus materials onto trucks for immediate offsite disposal.</p> <p>Trucks transporting dust-generating materials to and from the site may be wetted down or covered to reduce dust and material loss.</p> <p>Ensure all material deliveries such as fill, soil, sand, or gravel, etc., are transported to/from the site with loads appropriately secured/covered and/or dampened down.</p> <p>Ensure work areas, and any stockpiles of soil, gravel, sands, etc., are regularly dampened down to reduce dust.</p> |

| Air Quality and Emissions | Description |
|---|---|
| | If practical, all surplus materials generated during construction works are to be immediately loaded onto trucks ready for off-site transport and disposal. Limit tracking of soils around the site perimeter. |
| Monitoring & Reporting | Visually assess dust and implement additional controls if visible dust is observed moving off the site boundaries. Log any observations of dust leaving site boundary (the construction area). Air monitoring programme to be implemented if required following the start of civil earthworks to be undertaken and reported by the Environmental Consultant. |
| Corrective Actions | Assess all dust and odour complaints on a case-by-case basis and implement preventive actions as required. Complaints will be raised by the PCM to the Principal. Ensure that construction workers have an adequate supply of both respirators and dust masks the use of which will be as per the WHSEQ Plan to be developed by the PCM. |
| Relevant Legislation, Guidelines & Standards | AS 2986.1-2003 Workplace air quality - Sampling and analysis of volatile organic compounds by solvent desorption. AS 2986.2-2003 Workplace air quality – Part 2: Diffusive sampling method National Environment Protection (Ambient Air Quality) Measure 2003. National Environment Protection Measure Diesel Vehicle Emissions 2009. Occupational Safety and Health Administration (OSHA) (2020) Air Contaminants. |

9.4 Noise and Vibration

Noise may be generated through operation of vehicle, equipment and machinery. Noise may also be generated during construction or loading waste materials onto trucks for transportation from site. Vibration may occur during excavation, earthmoving and compaction of soil, and in some instances, drilling and jack-hammering activities.

Actions to mitigate and manage noise and vibration risks are summarised in Table 11.

Table 11: Noise and Vibration

| Noise & Vibration | Description |
|-----------------------------------|--|
| Objectives | To control, minimise or avoid impacts caused by noise and vibration during construction activities. |
| Performance Criteria | No internal and/or external complaints concerning noise or vibration. No damages to existing site buildings or stacked container modules. |
| Management Actions | Ensure engine driven machinery is switched off when not in use. Only use designated access ways, parking areas and roads during construction activities. Where practical, use noise attenuating barriers such as solid fences at the site boundary or employ sound-reducing products not limited to noise reducing blankets on machinery. Other required management actions as listed in the Specification. |
| Monitoring & Reporting | Undertake regular inspection of access areas and roads/walkways to assess the condition of noise attenuating barriers to be employed by the PCM. PCM will investigate noise and vibration complaints. Specific noise and vibration assessments are to be conducted to support noise and vibration complaint investigations. These will be established and developed on a case-by-case basis with consultation with the PCM and the Environmental Consultant with the Principal's approval. |
| Corrective Actions | Assess all noise or vibration complaints on a case-by-case basis. Fit noise suppression devices or change compaction machinery to a lower capacity, where possible. Plan high vibration activities so that works are undertaken in the shortest time reasonably possible. Change timing of noise producing activities. |

| Noise & Vibration | Description |
|---|---|
| Relevant Legislation, Guidelines & Standards | SA EPA (2014), Information Sheet, Construction Noise Updated EPA 425/17 February 2018. SA EPA (2007) Noise EPP. AS 2436:1981, Guide to noise and vibration control on construction, maintenance and construction sites. Local Nuisance and Litter Control Act 2016 (LNLC Act). |

9.5 Erosion and Sediment Control

Soil erosion can occur as a result of disturbance to the soil structure and subsequent movement of soil by erosive forces, such as water, wind and vehicle movement. Soil structure can also be disturbed by activities such as excavation. Sedimentation occurs when soil and waste particles are transported to water courses or drainage systems, usually by overflow of surface water.

A separate and detailed Sediment Control Plan complying with the SA EPA Code of Practice for the Building and Construction Industry (Stormwater Pollution Prevention), should be developed by the PCM with reference to this CEMP and the controls stated below. Table 12 outlines the key requirements for this plan.

Table 12: Erosion and Sediment Control Plan

| Erosion & Sedimentation | Description |
|---|---|
| Objectives | To avoid or minimise sediment runoff during construction activities, thereby controlling and minimising discharge of sediment or (potentially contaminated) sediments into established drainage systems. |
| Performance Criteria | No sediment laden (discoloured) stormwater runoff should enter surrounding offsite stormwater drains. No discharge of sediment into established drainage systems. |
| Management Actions | Install sediment control measures around the perimeter of work site(s), stormwater drains, temporary stockpiles and on slopes subject to run off, including sandbags, silt fences, silt booms, or other sediment control measures, as appropriate/practical. Periodic street sweeping of vehicular roadways leading in and out of the site. Use of a combination of vibration grids and rock pads to reduce vehicular drag out of sediments at site exit locations. Monitor and promptly maintain sediment controls. Ensure stockpiles (soil or materials) are located within sediment control zone (i.e., upslope of sediment barrier or control fence) or install sediment fencing around the base of stockpiles. In the event of a significant rain event (i.e., storm) postpone construction work and/or install additional control measures down slope of construction activities. Minimise bulk exposure of bulk excavation surfaces to limit sediment generation. This will also assist in limiting potential for dust generation. |
| Monitoring & Reporting | Visually inspect work site and any stockpiles daily to identify any areas of soil erosion and/or sedimentation following periods of precipitation. |
| Corrective Actions | Regularly inspect and monitor the condition of all erosion and sediment controls. PCM to undertake sediment control audits including the collection of photographs especially following periods of high precipitation. |
| Relevant Legislation, Guidelines & Standards | PCM to undertake sediment control audits including the collection of photographs especially following periods of high precipitation. South Australia Environmental Protection Authority (SA EPA) 1999 Stormwater Pollution Prevention Code of practice for the building and construction industry |

9.6 Soil Management

It is the intent of this CEMP to maintain the existing condition of site soils and mitigate the introduction of additional contaminants and exposure of site workers to deleterious soil condition which may yet to be discovered onsite.

Table 13 presents the requirements for Soil Management at the site to be considered by the PCM.

Table 13: Soil Management Measures

| Soil Management | Description |
|---|---|
| Objectives | To control handling, reuse or disposal of waste soils (where required). To minimise risk associated with the exposure of site workers to potential soil contaminants. |
| Performance Criteria | Site soils are not exposed to introduced hazardous materials such as fuel products and wastes generated as part of the construction process. Compliance with regulations and SA EPA / industry guidelines & codes of practice. Chemical compliance of all imported soils not sourced from a licensed quarry source to screening criteria stipulated in Section 4.1. Soil stockpiling to be conducted in accordance with the SA EPA Guideline for stockpile management. Compliance with Unexpected Finds Protocol with regards to additional hazardous materials or contaminated soils discovery. This includes suitable classification of soils for off-site disposal. |
| Management Actions | Compliance with Unexpected Funds Protocol (Section 10) to mitigate further contamination of site soils. This includes suitable assessment of soils in-line with the SA EPA WDF and the NEPM to establish off-site disposal classification or on-site reuse suitability. Ensure that construction staff utilise impervious gloves when handling site soils. Construction staff to utilise respirators should vapours be identified within underlying soil matrix or if the potential to generate dust is considered likely. Soil and other wastes to be tracked from exhumation/generation to reinstatement or disposal (where required). Where required, soils are to be temporarily stockpiled in a designated area ensuring that stockpiles are both not a source of dust (Section 9.3) and sediment laden run-off (Section 9.5). Agon recommends that the current soils stockpile representative of elevated BaP concentrations be formally classified and disposed off-site prior to major civil works being undertaken within site bounds. Soil should be classified in-line with prescribed SA EPA 2010 and 2013 guidance. |
| Monitoring & Reporting | The Environmental Consultant will undertake soil classification of surplus soil materials at the site should it be generated based on discovery of unexpected finds (Section 10). The Environmental Consultant will undertake an assessment of imported, quarry-sourced material at rates between 1 per 250 to 1,000 m ³ based on the total volume and type of material to be imported at the site. The Environmental Consultant will inspect all stockpiling areas at the site and provide guidance regarding any requirement for dust or odour management. Soil movements are to be tracked and logged by the PCM. |
| Corrective Actions | Investigate incidents and implement preventive actions as required. |
| Relevant Legislation, Guidelines & Standards | SA EPA (2013) Standard for the production and use of Waste Derived Fill, Oct 2013 SA EPA (2010a) Guideline for stockpile management: waste and waste derived products for recycling and reuse SA EPA (2010b), Waste Disposal Information Sheet: Current criteria for the classification of waste – including Industrial and Commercial Waste (Listed) Environment Protection Act 1993 |

9.7 Site Contamination Management

Site contamination with regards to chemicals in soil, groundwater and soil vapour have not been demonstrated to be present within site bounds. This generalisation does not include unexpected finds which are yet to be found.

In general, this CEMP serves to maintain the generally sound condition of the subsurface (with regards to chemicals). Prescribed actions to maintain current soil, groundwater and soil vapour conditions and mitigate and manage potential contamination risks are summarised in Table 14.

Table 14: Site Contamination Management

| Site Contamination | Description |
|---|--|
| Objectives | To mitigate potential risks to the environment and human health from chemicals stored at the site and residual soil contamination during construction activities. |
| Performance Criteria | Prevention of potential harm to human health and the environment. Compliance with legislative requirements. Compliance with Unexpected Finds Protocol with regards to additional hazardous materials or contaminated soils discovery. |
| Management Actions | All site workers involved with construction activities are to be inducted into the CEMP, including discussion of the location of site contamination risk and requirements of the Unexpected Finds Protocol. The PCM must contact the Principal if visual or olfactory observations indicate the potential presence of additional contamination at a particular location. The Environmental Consultant will then undertake an intrusive assessment to determine whether the visual or olfactory evidence reported by the PCM are associated with actual site contamination. The PCM may engage the Environmental Consultant to monitor the removal of the impacted material (should it be discovered). Any impacted material discovered will be tracked from exhumation to its final location (landfill or another location on-site), with Environmental Consultant oversight. Ensure construction staff utilise appropriate PPE when handling site soils including impervious gloves and respirators should vapours be identified within underlying soil matrix. Where required, soils are to be temporarily stockpiled in a designated area ensuring that stockpiles are both not a source of dust (Section 9.3) and sediment laden run-off (Section 9.5). Agon recommends that the current soils stockpile representative of elevated BaP concentrations be formally classified and disposed off-site prior to major civil works being undertaken within site bounds. |
| Monitoring & Reporting | Environmental Consultant to conduct chemical testing of soils for the following purposes: <ul style="list-style-type: none"> Appraise environmental risk presented by soils in relation to or generated by unexpected discoveries (Section 10); and To appraise the suitability of soils exhumed from the site or suitability materials to be imported on-site should it be required. Soil results will be assessed against soil chemical criteria established in Section 4.1. Concentrations exceeding adopted criteria will require further investigation and if necessary remedial considerations if onsite reuse is preferred. Remedial programmes will be communicated to the PCM, developed by the Environmental Consultant, approved by the Principal. |
| Corrective Actions | If visual/ olfactory observations indicate the potential presence of additional impacts in building materials and/ or soils, cease work immediately within this location and notify the Principal (see Section 10) |
| Relevant Legislation, Guidelines & Standards | SA EPA (2013) Standard for the production and use of Waste Derived Fill SA EPA (2015) Environment Protection (Water Quality) Policy NEPC (1999) National Environmental Protection Council (2013) National Environment Protection (Assessment of Site Contamination) Measure (NEPM) 1999, Amended 2013 Environment Protection Act 1993 |

9.8 Hazardous Materials Management

Hazardous materials can be in the form of a range of materials which includes but not limited to ACMs (known or as an unexpected find). Hazardous materials can also be introduced to the site as part of the future civil works programme. This can include a range of petrochemicals (fuels, lubricants and degreasers) and cleaning agents. The requirements for management of these hazardous materials are prescribed in Table 15.

Table 15: Hazardous Materials Management

| Hazmat | Description |
|---|---|
| Objectives | To control the identification and appropriate handling of hazardous materials (where identified, present or introduced to the site). This includes potential hazardous materials within existing site buildings. |
| Performance Criteria | <p>Compliance with Safework SA, SA EPA and industry regulations, guidelines, and codes of practice.</p> <p>Compliance with Unexpected Finds Protocol with regards to additional hazardous materials discovery including asbestos and coal tar.</p> <p>AFM results (should it be required) are reported at concentrations below the laboratory detection limit of 0.01 fibres/ml for all activities requiring ACM removal.</p> <p>Visual clearance of asbestos (following removal) is confirmed with an asbestos clearance certificate.</p> |
| Management Actions | <p>Conduct a pre-demolition hazardous materials audit of the hotel structure prior to formal demolition.</p> <p>Remove and dispose of hazardous materials in accordance with relevant legislation and within site use tolerances. This includes contracting a suitably licensed asbestos removalist for asbestos-related discoveries including conducting AFM and subsequent provision of asbestos clearance certificates.</p> <p>Should it be utilised, hazardous waste receptacles should be adequately labelled, covered and placed away from general waste bins (to avoid confusion or accidental disposal in the inappropriate bin) and 'sensitive' areas on-site including the staff lunchroom and break/smoking areas.</p> <p>Ensure all hazardous materials introduced at the site (i.e., fuels and lubricants) are identified/labelled, stored in appropriate vessels, handled appropriately, and disposed of by a licensed contractor.</p> <p>Plant/vehicle refuelling is to be conducted in one bunded area (should this process need to occur onsite).</p> <p>Additional items suspected to be hazardous in nature should be isolated for formal assessment and reviewed by the Principal and Environmental Consultant.</p> |
| Monitoring & Reporting | <p>Track waste volumes of hazardous materials including the collection of waste disposal dockets. The PCM will suitably engage a licensed asbestos assessor(s) to:</p> <ul style="list-style-type: none"> Ensure that the existing sit surface has been cleared of ACMs (if identified) to reduce the potential for track rolling loose fragments and generating a friable ACM condition. Supervise and monitor the practical removal of ACMs should they be identified. ACM removal will be undertaken under asbestos conditions and will include Air Fibre Monitoring (AFM) events. An asbestos clearance certificate will be provided following appropriate ACM removal. <p>The PCM will contact the Principal and the Environmental consultant following the discovery of additional hazardous materials in the subsurface.</p> <p>This is in line with the requirement of the Unexpected Finds Protocol (Section 10)</p> |
| Corrective Actions | <p>Investigate incidents and implement preventive actions as required.</p> <p>Investigate incidents where hazardous waste has not been handled or disposed of appropriately.</p> |
| Relevant Legislation, Guidelines & Standards | <p>SA EPA Handbook for Pollution Avoidance on Building Sites.</p> <p>Environment Protection Act 1993.</p> <p>Work Health & Safety Act and Regulations 2012.</p> <p>How to Manage and Control Asbestos in the Workplace Code of Practice 2011.</p> <p>How to Safely Remove Asbestos Code of Practice 2011.</p> |

9.9 Waste Management

All waste must be managed (and disposed) to comply with relevant SA EPA regulations and in line with the best practice guidance for Building Waste in the SA EPA Handbook for Pollution Avoidance on Building Sites. This includes disposing of building waste, where feasible, in line with the Waste Hierarchy, including minimising waste generation (including packaging), maximising on-site reuse (where this does not cause other nuisance or environmental problems), and disposing of waste for recycling instead of to landfill.

The requirements for management of waste are presented in Table 16.

Table 16: Waste Management

| Noise & Vibration | Description |
|---|--|
| Objectives | To control the handling and disposal of site wastes. To identify opportunities to reuse waste generated by construction activities. |
| Performance Criteria | Minimise waste generation, including packaging, and disposal to recycling facilities. Compliance with regulations and SA EPA and industry guidelines and codes of practice. |
| Management Actions | Use or encourage building material suppliers to minimise their packaging or accept it back for reuse or recycling. Ensure all waste is contained, transported, stored and handled appropriately, taking into consideration fire safety, OHS and protection of water and soil resources. Ensure all hazardous and controlled wastes on the site are identified and handled appropriately and disposed of by a licensed contractor (as per Table 12). Ensure general waste (cans, paper, etc.) are placed in separate covered recycle waste skips / bins to prevent access to wild/feral fauna (i.e., seagulls) Ensure construction waste materials are sorted and placed in separate covered waste skips / bins for recycling where feasible. Be vigilant for waste management issues and report to Superintendent if required. Keep the site free from waste materials by directing regular clean ups. Ensure any portable toilets are serviced regularly and checked for leakages. |
| Monitoring & Reporting | Undertake monitoring of site to ensure regular clean-ups are being undertaken. Inspect waste storage and disposal facilities to ensure they are functioning sufficiently and dealing adequately with the quantities of waste (i.e., ensure waste is not overflowing). |
| Corrective Actions | Investigate incidents and implement preventive actions as required. Investigate incidents of inappropriate housekeeping practices. Undertake practical segregation of wastes to maximise recycling capacity/recovery and minimise landfill waste potential. |
| Relevant Legislation, Guidelines & Standards | SA EPA Handbook for Pollution Avoidance on Building Sites. Environment Protection Policy (Waste-to-Resources) 2010. Environment Protection Act 1993. |

10.0 UNEXPECTED FINDS PROTOCOL

10.1 Purpose

In general, environmental assessments are based on results between discrete sampling or investigation locations. Subsurface conditions between sampling points are inferred based on a range of informed assumptions. Regardless of the density of previous sampling activities, there exists a likelihood that unexpected conditions may still be encountered between each sampling location which are likely to be discovered during bulk excavation activities.

Unexpected finds (in this context) include subsurface conditions which have not been previously identified at previous sampling locations and have a potential to cause environmental harm.

10.2 Known Sources of Contamination

A defined source of contamination has not been identified at the site that has not been addressed (i.e. the stockpile. However, underlying site soils have been observed to include non-soil inclusions and may indicate potential localised areas of chemical contamination in the subsurface. The aforementioned conditions are expected of soils underneath the site, are not unexpected finds and are subject management controls provided in Section 9.

10.3 General Environmental Controls

In general, the discovery of any unexpected find will require the PCM to cease all works and contact the Environmental Consultant to assess the nature of the 'unexpected find'.

To minimise or mitigate potential construction delays, Agon have developed a range of environmental management measures targeting the most likely array of unexpected finds beneath the site (see Section 10.4). However, the following overarching environmental controls are applicable regardless of the nature of the find:

- Unexpected finds (proven or otherwise) are to be communicated to the Principal and the Environmental Consultant regardless of whether it falls within the range of finds in Section 10.4. The intent of this is to provide the PCM support in selecting valid controls, confirm authority to proceed with construction works should the find be considered of sufficiently low risk or allow immediate development of additional environmental controls should they be required.
- Confirmed finds are to be geo-located either by a handheld GPS or by a qualified surveyor to allow relocation of each find should works be required to proceed, regardless of the nature of the find (i.e., backfilling a partially assessed excavation for safety reason) or if further investigations are required; and
- For controls which require either material or soils to be temporarily stockpiled pending further assessment and/or disposal.

The PCM will ensure that materials (soil, recyclable resource(s) or waste(s)) generated from the management of unexpected finds will be tracked through vetted documentation which can be reviewed upon request by the Principal.

10.4 Potential Finds and Specified Environmental Controls

The following range of unexpected finds have been collated for the PCM's review and consideration as part of future civil works. This range was developed based on the site setting and known environmental conditions.

A range of environmental management actions (depending on the quantum of unexpected finds, should they be identified) have been established for each item.

10.4.1 Asbestos Containing Materials (ACMs)

ACM if discovered are likely to be in the form of bonded ACM fragments. Any new ACM discoveries will be supported by ACM analysis to confirm the type of asbestos encountered.

There also exist a likelihood that ACMs are present within remaining portions of the site which has not been disturbed. As such, environmental management procedures that need to be undertaken as part of an unexpected ACM find include:

- Any in-situ and/or relatively intact underground infrastructure be discovered. In this case, ACM removal will be conducted under supervision by a licensed/qualified asbestos assessor who will also undertake an air fibre monitoring (AFM) event during the duration of the removal. The appointed asbestos assessor will provide a clearance certificate to support the removal of the identified ACM structure; and
- Discovery of much larger ACM pieces such as former corrugated fencing are likely along the site boundary (if present). Such a discovery will require further action including:
 - Engagement of a qualified and licensed/qualified asbestos assessor to assist in delineating the extent and concentration of ACMs in the subsurface. This also includes establishing the severity of the ACM contamination to establish practical levels of control;
 - Establishment of a remedial/management plan in-line with the assessed extent and severity of the discovered impact. Remedial measures can range between a supervised emu-pick to a bulk excavation and removal exercise which may necessitate an Asbestos Removal Control Plan (ARCP); and
 - Exhumed ACMs shall either be directly disposed off-site under license (in the case of manually separated pieces) or temporarily stored within a designated receptacle and suitably encapsulated.

In either case, asbestos disturbance and removal works shall conducted under asbestos conditions and will include Air Fibre Monitoring (AFM) events. An asbestos clearance certificate will be provided following appropriate ACM removal.

10.4.2 Construction and Demolition Waste

Construction and demolition (C&D) wastes in the context of this CEMP will comprise of inert building materials in the form of concrete, bricks, steel, processed timbers, plaster boards, plastic and general builders' waste. Residual bituminous materials, should it be present within any discovered waste mass, will also be classified as C&D waste.

Where identified, C&D waste shall be excavated and practically segregated from the surrounding soil mass. If possible, C&D wastes should be further screened to maximise recycling potential into resource material streams such as concrete, bricks and pavers. C&D waste piles are to be inspected by the PCM to ensure C&D waste piles are devoid of ACM, which may necessitate management actions in Section 10.4.1.

C&D wastes, either as a total mass or segregated resource streams shall be disposed off-site to an appropriate hard waste and/or recycling facility.

10.4.3 Residual Infrastructure

Potential residual infrastructure includes remnants of former building foundations, pavements and footings. Environmental management actions will be required if evidence of actual infrastructure is uncovered during the excavation process. These will include:

- Identification of an intact hardstand (concrete, brick or asphalt) floor at depth or wall structures (including brick walls); and
- Identification of any additional utility alignments inclusive of residual fuel infrastructure (i.e., product pipelines).

In either case, areas indicating the presence of residual underground infrastructure will require to be isolated until further assessment can be conducted under the guidance of an Environmental Consultant who will assist in determining the purpose of the structure, potential contamination issues including any detrimental in-fill which may have been utilised to install the structure.

The Environmental Consultant may request the PCM to proceed with the demolition and removal of the structure under environmental supervision should environmental risk associated with the structure be deemed low or insignificant (where residual or evidence of chemical storage has not been identified). Otherwise, the Environmental Consultant will request to conduct request soil testing with approval from the Principal.

Following consultation, potential assessment and removal, materials generated from infrastructure removal should be practically segregated for off-site disposal and recycling. In most cases, such wastes may be classified as C&D wastes. C&D waste piles are to be inspected by the PCM to ensure C&D waste piles are devoid of ACMs which may necessitate management actions in Section 10.4.1.

10.5 Aesthetic Considerations

Additional aesthetic conditions which may indicate the presence of contamination include:

- Stained and or discoloured fill or natural soils; and
- Volatile, metallic, or other noxious odours.

Discovery of these items would require consultation with the Environmental Consultant prior to proceeding as this may indicate yet to be characterised chemical impacts on-site.

10.6 Geotechnical Considerations

Where prescribed, further soil assessments which may be undertaken to establish the on-site reuse suitability of soils only relate to its chemical properties. Noting that most soils with deleterious conditions are likely to be temporarily stockpiled, it is worth considering undertaking a supporting geotechnical appraisal whilst environmental results are pending.

The geotechnical suitability of site soils will be under the discretion of a suitably qualified geotechnical consultant to be assigned by the Principal.

11.0 REFERENCES

Agon (2022) Preliminary Site Investigation, Buckingham Arms Hotel, 1-9 Walkerville Terrace, Gilberton. Ref: JC1083_PSI.01, dated 22 June 2022; and

Agon (2023) Due Diligence Environmental Assessment, Buckingham Arms, 1-9 Walkerville Terrace, Gilberton, South Australia. Ref: JC1225_DDEA.02, dated 7 November 2023

AS (2436- 1981) Guide to Noise Control on Construction, Maintenance and Demolition Sites;

ASRIS (2023) Atlas of Australian Soil Resource Information System (2023), ASRIS, located at <http://www.asris.csiro.au/mapping/viewer.htm>

DEW (2023) Department for Environment and Water, Water Connect, located at: <http://www.waterconnect.sa.gov.au>.

DPTI (2023) Department of Planning Transport and Infrastructure (2020), South Australian Integrated Land Information System (SAILIS), located at: <http://www.sailis.sa.gov.au>

NEPC (2013) National Environmental Protection Council (1999) National Environment Protection (Assessment of Site Contamination) Measure (NEPM) 1999, Amended 2013.

NEPM (2003) Ambient Air Quality

NEPM (2009) Diesel Vehicle Emissions

OSHA (2020) Air Contaminants;

SA EPA (1999) Stormwater Pollution Prevention Code of practice for the building and construction industry;

SA EPA (2010) Guideline for stockpile management: waste and waste derived products for recycling and reuse

SA EPA (2013) Standard for the production and use of Waste Derived Fill, Oct 2013

SA EPA (2014) Information Sheet, Construction Noise Updated EPA 425/17 February 2017

SA EPA (2015) Environment Protection (Water Quality) Policy

SA EPA (2021a) Environmental management of Dewatering During Construction Activities, Publication EPA 1093 (Updated June 2021)

SA EPA (2021b) CEMP Industry Guideline, Publication EPA 1095 (Updated October 2021)

SAPPA (2010) SA Property & Planning Atlas (2010), located at: <https://maps.sa.gov.au/SAPPA/>

12.0 LIMITATIONS OF THIS REPORT

All and any Services proposed by Agon to the Client were subject to the Terms and Conditions listed in Agon's **QFB-008 Consultancy Agreement** (accessible at <https://agonenviro.com.au/documents/>). Unless otherwise expressly agreed to in writing and signed by Agon, Agon does not agree to any alternative terms or variation of these terms if subsequently proposed by the Client. The Services were carried out in accordance with the current and relevant industry standards of testing, interpretation and analysis. The Services were carried out in accordance with Commonwealth, State, Territory or Government legislation, regulations and/or guidelines. The Client was deemed to have accepted these Terms when the Client signed the Proposal (where indicated) or when the Company commenced the Services at the request (written or otherwise) of the Client.

The Services were carried out for the Specific Purpose, outlined in the body of the Proposal. To the fullest extent permitted by law, Agon, its related bodies corporate, its officers, consultants, employees and agents assume no liability, and will not be liable to any person, or in relation to, any losses, damages, costs or expenses, and whether arising in contract, tort including negligence, under statute, in equity or otherwise, arising out of, or in connection with, any matter outside the Specific Purpose.

The Client acknowledged and agreed that proposed investigations were to rely on information provided to Agon by the Client or other third parties. Agon made no representation or warranty regarding the completeness or accuracy of any descriptions or conclusions based on information supplied to it by the Client, its employees or other third parties during provision of the Services. Under no circumstances shall Agon have any liability for, or in relation to, any work, reports, information, plans, designs, or specifications supplied or prepared by any third party, including any third party recommended by Agon. The Client releases and indemnifies Agon from and against all Claims arising from errors, omissions or inaccuracies in documents or other information provided to Agon by the Client, its employees or other third parties.

The Client was to ensure that Agon had access to all information, sites and buildings as required by or necessary for Agon to undertake the Services. Notwithstanding any other provision in these Terms, Agon will have no liability to the Client or any third party to the extent that the performance of the Services was not able to be undertaken (in whole or in part) due to access to any relevant sites or buildings being prevented or delayed due to the Client or their respective employees or contractors expressing safety or health concerns associated with such access.

Unless otherwise expressly agreed to in writing and signed by Agon, Agon, its related bodies corporate, its officers, employees and agents assume no liability and will not be liable for lost profit, revenue, production, contract, opportunity, loss arising from business interruption or delay, indirect or consequential loss or loss to the extent caused or contributed to by the Client or third parties, suffered or incurred arising out of or in connection with our Proposals, Reports, Deliverables, the Project or the Agreement. In the event Agon is found by a Court or Tribunal to be liable to the Client for any loss or damage arising in connection with the Services, the Client's entitlement to recover damages from Agon shall be reduced by such amount as reflects the extent to which any act, default, omission or negligence of the Client, or any third party, caused or contributed to such loss or damage. Unless otherwise agreed in writing and signed by both parties, Agon's total aggregate liability will not exceed the total consulting fees paid by the client in relation to this Proposal. For further detail, see Agon's Terms and Conditions listed in Agon's **QFB-008 Consultancy Agreement** (accessible at <https://agonenviro.com.au/documents/>).

The Report/Document/Deliverables are provided for the exclusive use of the Client and for this Project only, in accordance with the Scope and Specific Purpose as outlined in the Agreement, and only those third parties who have been authorised in writing by Agon. It should not be used for other purposes, other projects or by a third party unless otherwise agreed and authorised in writing by Agon. Any person relying upon this Report/Document/Deliverables beyond its exclusive use and Specific Purpose, and without the express written consent of Agon, does so entirely at their own risk and without recourse to Agon for any loss, liability or damage. To the extent permitted by law, Agon assumes no responsibility for any loss, liability, damage, costs or expenses arising from interpretations or conclusions made by others, or use of the Report by a third party. Except as specifically agreed by Agon in writing, it does not authorise the use of this Report by any third party. It is the responsibility of third parties to independently make inquiries or seek advice in relation to their particular requirements and proposed use of the site.

The conclusions, or data referred to in this Report/Document/Deliverable, should not be used as part of a specification for a project without review and written agreement by Agon. This Report/Document/Deliverable has been written as advice and opinion, rather than with the purpose of specifying instructions for design or redevelopment. Agon does not purport to recommend or induce a decision to make (or not make) any purchase, disposal, investment, divestment, financial commitment or otherwise in relation to the site(s) it investigated or general management plan it proposed.

This Report/Document/Deliverable should be read in whole and should not be copied in part or altered. The Report/Document/Deliverable as a whole sets out the findings of the investigations. No responsibility is accepted by Agon for use of parts of the Report/Document/Deliverable in the absence (or out of context) of the balance of the Report/Document/Deliverable.

APPENDIX A: FIGURES

